
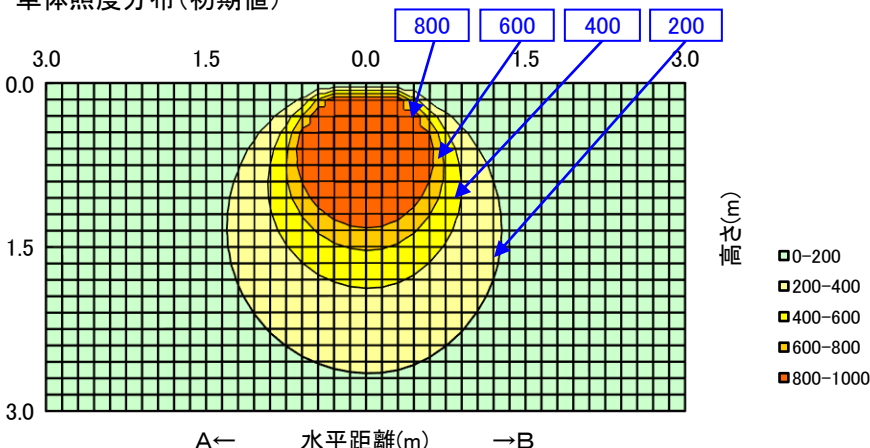
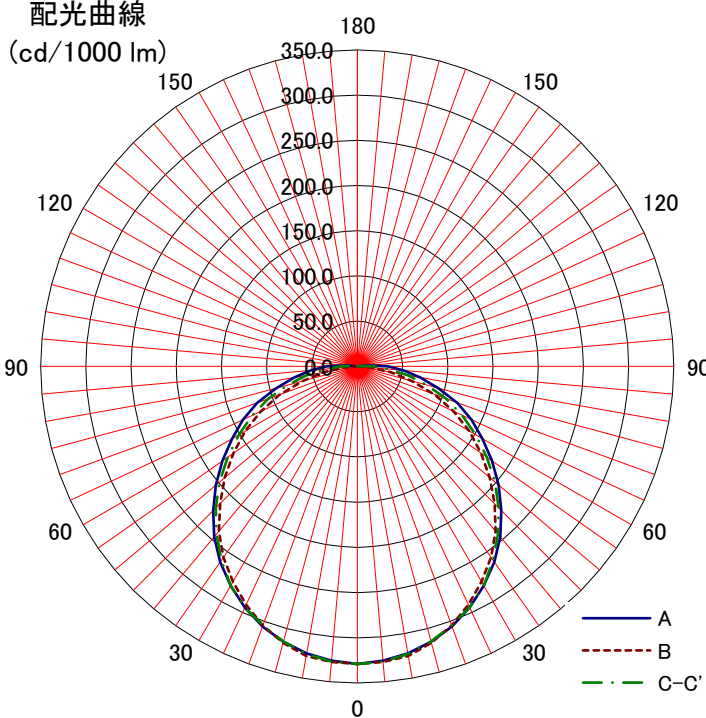


日立照明器具 照明特性																															
名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%															
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%															
		床	10%														0%														
形式: TC4B1	室指数	固有照明率 S/H=1.0																													
<備考>	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29																
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38																
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45																
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.54	0.64	0.59	0.54	0.52																
	1.5	0.83	0.74	0.67	0.82	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57																
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65																
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70																
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.73																
	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79																
光源形式 CET404NE-X14A	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.87	0.85	0.82																
器具光束	7	1.03	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87																
4,280 lm	10	1.05	1.03	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91																
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div>  <div>0-200 200-400 400-600 600-800 800-1000</div>																													
上方光束 Fu= 0%																															
下方光束 Fd= 100%																															
最大取付間隔																															
A-A 1.28 H																															
B-B 1.26 H																															
保守率	良	0.86	<div>配光曲線</div>  <div>(cd/1000 lm)</div> <div>350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0</div> <div>180 150 120 90 60 30 0</div> <div>A B C-C'</div>																												
	中	0.81																													
	否	0.72																													
光度 (cd/1000 lm)																															
	A-0	B-B																C-0	A'-0	C'-0											
0	329	329																329													
10	322	325	323																												
20	306	305	305																												
30	280	275	280																												
40	246	238	242																												
50	204	191	199																												
60	160	143	151																												
70	118	92	105																												
80	71	38	57																												
90	34	1	18																												
100																															
110																															
120																															
130																															
140																															
150																															
160																															
170																															
180																															