
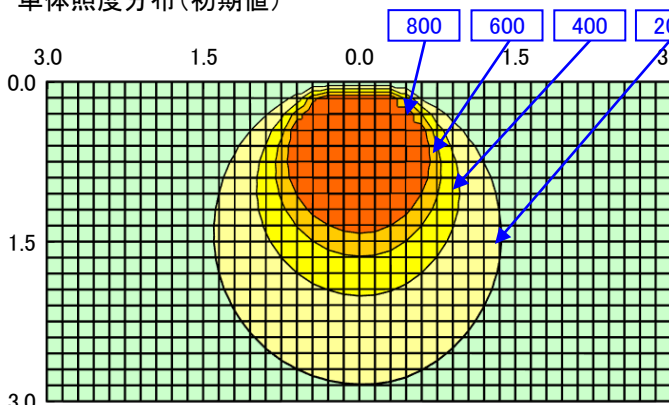
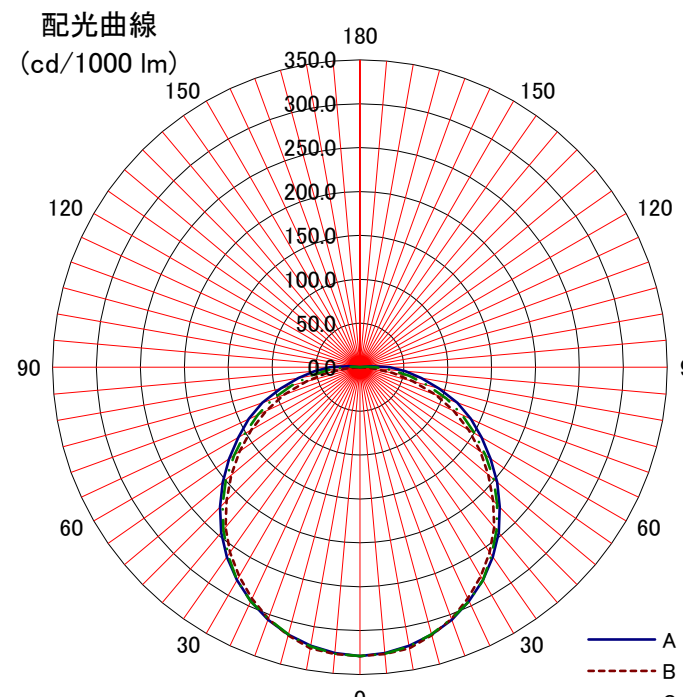


日立照明器具 照明特性

名称: 交換形LED埋込形	天井	80%			70%				50%			30%			0%																																																																																																																									
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
			床	10%														0%																																																																																																																						
形式: TC4B1	室指数	固有照明率 S/H=1.0																																																																																																																																						
<div><備考></div> <div>姿図</div> <div></div>	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29																																																																																																																									
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38																																																																																																																									
	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45																																																																																																																									
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.54	0.64	0.59	0.54	0.52																																																																																																																									
	1.5	0.83	0.74	0.67	0.82	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57																																																																																																																									
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65																																																																																																																									
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70																																																																																																																									
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.73																																																																																																																									
光源形式	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79																																																																																																																									
CET405WWG-N14A	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.87	0.85	0.82																																																																																																																									
器具光束	7	1.03	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87																																																																																																																									
4,910 lm	10	1.05	1.03	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91																																																																																																																									
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> <div></div> <div>800600400200</div> <div>0-200200-400400-600600-800800-1000</div>																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 100%																																																																																																																																								
最大取付間隔		<div>配光曲線 (cd/1000 lm)</div> <div></div> <div>A-B-B-A-C-C'</div>																																																																																																																																						
A-A 1.28 H																																																																																																																																								
B-B 1.26 H																																																																																																																																								
保守率	良	0.86	<div>光度 (cd/1000 lm)</div> <table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>329</td><td>329</td><td>329</td><td></td><td></td></tr><tr><td>10</td><td>322</td><td>325</td><td>323</td><td></td><td></td></tr><tr><td>20</td><td>306</td><td>305</td><td>305</td><td></td><td></td></tr><tr><td>30</td><td>280</td><td>275</td><td>280</td><td></td><td></td></tr><tr><td>40</td><td>246</td><td>238</td><td>242</td><td></td><td></td></tr><tr><td>50</td><td>204</td><td>191</td><td>199</td><td></td><td></td></tr><tr><td>60</td><td>160</td><td>143</td><td>151</td><td></td><td></td></tr><tr><td>70</td><td>118</td><td>92</td><td>105</td><td></td><td></td></tr><tr><td>80</td><td>71</td><td>38</td><td>57</td><td></td><td></td></tr><tr><td>90</td><td>34</td><td>1</td><td>18</td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	329	329	329			10	322	325	323			20	306	305	305			30	280	275	280			40	246	238	242			50	204	191	199			60	160	143	151			70	118	92	105			80	71	38	57			90	34	1	18			100						110						120						130						140						150						160						170						180					
	A-0	B-B															C-0	A'-0	C'-0																																																																																																																					
0	329	329															329																																																																																																																							
10	322	325															323																																																																																																																							
20	306	305															305																																																																																																																							
30	280	275															280																																																																																																																							
40	246	238															242																																																																																																																							
50	204	191															199																																																																																																																							
60	160	143	151																																																																																																																																					
70	118	92	105																																																																																																																																					
80	71	38	57																																																																																																																																					
90	34	1	18																																																																																																																																					
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
	中	0.81																																																																																																																																						
	否	0.72																																																																																																																																						