
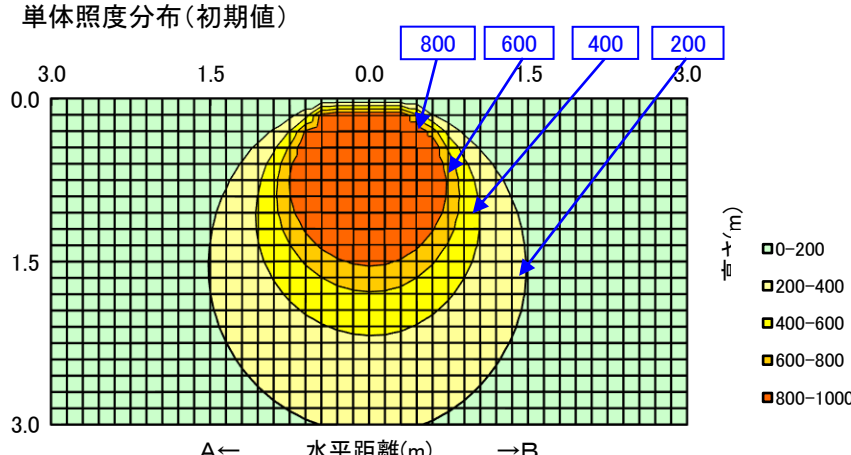
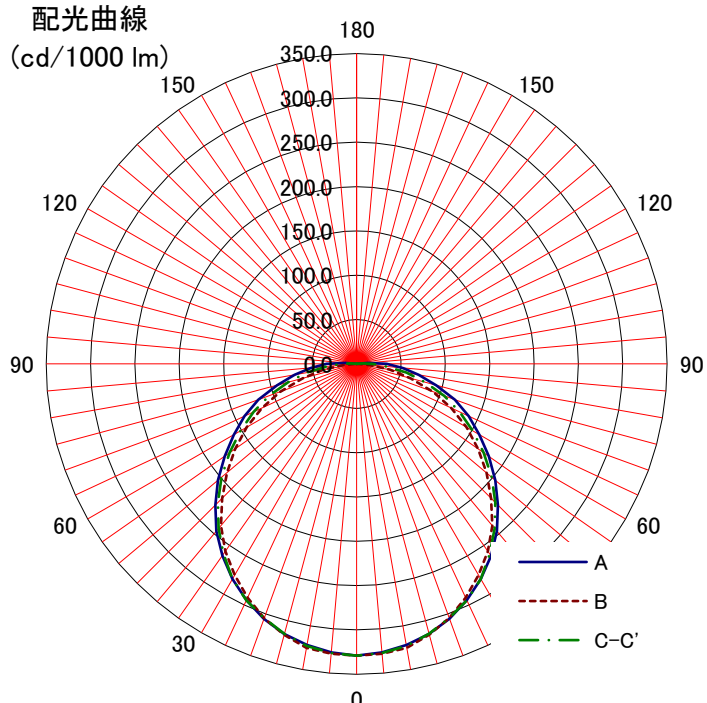


日立照明器具 照明特性

名称: 交換形LED埋込形	反射率	天井	80%				70%				50%			30%			0%																																																																																																																														
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																															
		床	10%															0%																																																																																																																													
形式: TC4B1	室指数	固有照明率 S/H=1.0																																																																																																																																													
<備考>	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29																																																																																																																																
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38																																																																																																																																
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45																																																																																																																																
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.54	0.64	0.59	0.54	0.52																																																																																																																																
	1.5	0.83	0.74	0.67	0.82	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57																																																																																																																																
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65																																																																																																																																
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70																																																																																																																																
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.73																																																																																																																																
光源形式	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79																																																																																																																																
CET406WE-N14A	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.87	0.85	0.82																																																																																																																																
器具光束	7	1.03	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87																																																																																																																																
5,780 lm	10	1.05	1.03	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91																																																																																																																																
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																																																																																																																																													
上方光束 Fu= 0%																																																																																																																																															
下方光束 Fd= 100%																																																																																																																																															
最大取付間隔		<div>配光曲線</div> 																																																																																																																																													
A-A 1.28 H																																																																																																																																															
B-B 1.26 H																																																																																																																																															
保守率	良 0.86	<table><tr><th colspan="6">光度 (cd/1000 lm)</th></tr><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>329</td><td>329</td><td>329</td><td></td><td></td></tr><tr><td>10</td><td>322</td><td>325</td><td>323</td><td></td><td></td></tr><tr><td>20</td><td>306</td><td>305</td><td>305</td><td></td><td></td></tr><tr><td>30</td><td>280</td><td>275</td><td>280</td><td></td><td></td></tr><tr><td>40</td><td>246</td><td>238</td><td>242</td><td></td><td></td></tr><tr><td>50</td><td>204</td><td>191</td><td>199</td><td></td><td></td></tr><tr><td>60</td><td>160</td><td>143</td><td>151</td><td></td><td></td></tr><tr><td>70</td><td>118</td><td>92</td><td>105</td><td></td><td></td></tr><tr><td>80</td><td>71</td><td>38</td><td>57</td><td></td><td></td></tr><tr><td>90</td><td>34</td><td>1</td><td>18</td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																光度 (cd/1000 lm)							A-0	B-B	C-0	A'-0	C'-0	0	329	329	329			10	322	325	323			20	306	305	305			30	280	275	280			40	246	238	242			50	204	191	199			60	160	143	151			70	118	92	105			80	71	38	57			90	34	1	18			100						110						120						130						140						150						160						170						180					
光度 (cd/1000 lm)																																																																																																																																															
	A-0																	B-B	C-0	A'-0	C'-0																																																																																																																										
0	329																	329	329																																																																																																																												
10	322																	325	323																																																																																																																												
20	306																	305	305																																																																																																																												
30	280																	275	280																																																																																																																												
40	246																	238	242																																																																																																																												
50	204																	191	199																																																																																																																												
60	160																	143	151																																																																																																																												
70	118	92	105																																																																																																																																												
80	71	38	57																																																																																																																																												
90	34	1	18																																																																																																																																												
100																																																																																																																																															
110																																																																																																																																															
120																																																																																																																																															
130																																																																																																																																															
140																																																																																																																																															
150																																																																																																																																															
160																																																																																																																																															
170																																																																																																																																															
180																																																																																																																																															
	中 0.81																																																																																																																																														
	否 0.72																																																																																																																																														