



日立照明器具 照明特性

名称: 交換形LED埋込形	反射率	天井	80%				70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														
形式: TC4B	室指数	固有照明率 S/H=1.0															
<div><備考></div> <div>姿図</div> <div></div>	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29		
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38		
	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45		
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.54	0.64	0.59	0.54	0.52		
	1.5	0.83	0.74	0.67	0.82	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57		
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65		
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70		
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.73		
光源形式	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79		
CET406DG-C14A	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.87	0.85	0.82		
器具光束	7	1.03	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87		
5,560 lm	10	1.05	1.03	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91		

器具効率 Ft= 100%			
上方光束 Fu= 0%			
下方光束 Fd= 100%			
最大取付間隔			
A-A		1.28	H
B-B		1.26	H
保守率	良	0.86	
	中	0.81	
	否	0.72	
光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	329	329	329
10	322	325	323
20	306	305	305
30	280	275	280
40	246	238	242
50	204	191	199
60	160	143	151
70	118	92	105
80	71	38	57
90	34	1	18
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布 (初期値)

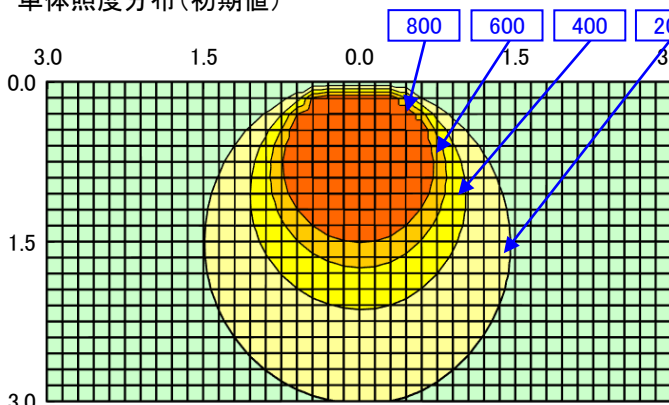

単位: 照度 (lx)


0-200
200-400
400-600
600-800
800-1000

3.0 1.5 0.0 1.5 3.0

0.0 1.5 3.0

A← 水平距離(m) →B

配光曲線 (cd/1000 lm)

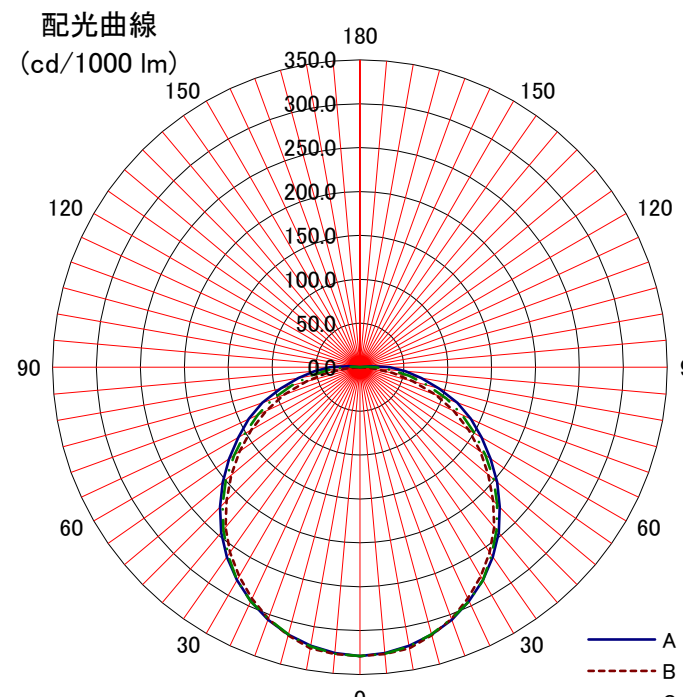

単位: 光束 (lm)

0 30 60 90 120 150 180

0.0 50.0 100.0 150.0 200.0 250.0 300.0 350.0

A
B
C-C'