
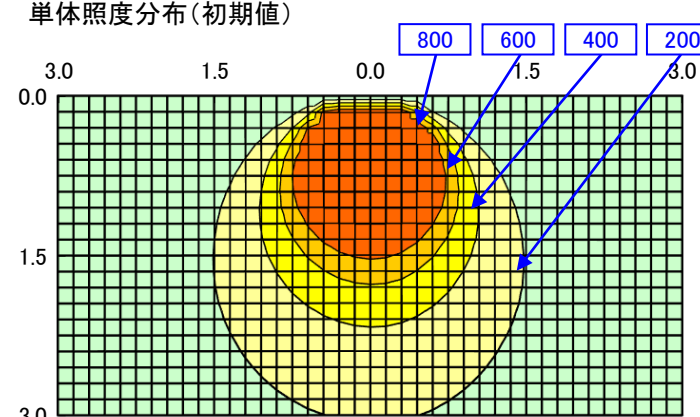
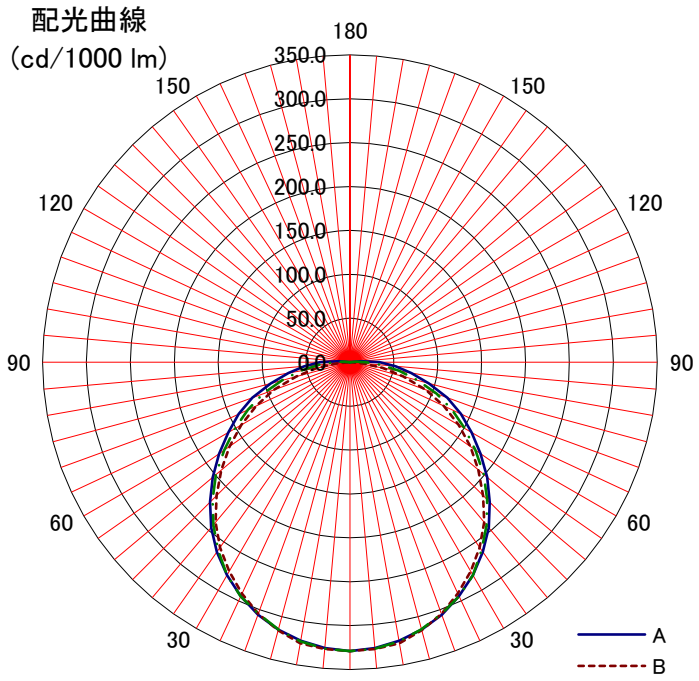


## 日立照明器具 照明特性

名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%														0%			
		室指数	固有照明率 S/H=1.0																	
形式: TC4B1																				
<div>&lt;備考&gt;</div> <div>姿図</div> <div></div>		0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29				
		0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38				
		1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45				
		1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.54	0.64	0.59	0.54	0.52				
		1.5	0.83	0.74	0.67	0.82	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57				
		2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65				
		2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70				
		3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.73				
		4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79				
光源形式		5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.87	0.85	0.82				
CET406WG-N14A		7	1.03	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87				
器具光束		10	1.05	1.03	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91				
5,730 lm																				
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> <div></div> <div>(m) 高さ</div> <div>0-200</div> <div>200-400</div> <div>400-600</div> <div>600-800</div> <div>800-1000</div> <div>A ← 水平距離(m) → B</div>																		
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div> <div></div> <div>A</div> <div>B</div> <div>C-C'</div>																		
A-A 1.28 H																				
B-B 1.26 H																				
保守率																				
良	0.86																			
中	0.81																			
否	0.72																			
光度 (cd/1000 lm)																				
A-0	B-B																C-0	A'-0	C'-0	
0	329																329	329		
10	322																325	323		
20	306	305	305																	
30	280	275	280																	
40	246	238	242																	
50	204	191	199																	
60	160	143	151																	
70	118	92	105																	
80	71	38	57																	
90	34	1	18																	
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				