



日立照明器具 照明特性

名称: 交換形LED埋込形	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%												
形式: TC4B1	室指数	固有照明率 S/H=1.0														
<div>〈備考〉</div> <div>姿図</div> <div></div>	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29	
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38	
	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45	
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.54	0.64	0.59	0.54	0.52	
	1.5	0.83	0.74	0.67	0.82	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57	
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65	
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70	
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.73	
光源形式	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79	
CET406LG-X14A	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.87	0.85	0.82	
器具光束	7	1.03	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87	
5,480 lm	10	1.05	1.03	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91	

器具効率 Ft= 100%			
上方光束 Fu= 0%			
下方光束 Fd= 100%			
最大取付間隔			
A-A		1.28	H
B-B		1.26	H
保守率	良	0.86	
	中	0.81	
	否	0.72	

光度 (cd/1000 lm)				
	A-0	B-B	C-0	
0	329	329	329	
10	322	325	323	
20	306	305	305	
30	280	275	280	
40	246	238	242	
50	204	191	199	
60	160	143	151	
70	118	92	105	
80	71	38	57	
90	34	1	18	
100				
110				
120				
130				
140				
150				
160				
170				
180				


単体照度分布 (初期値)

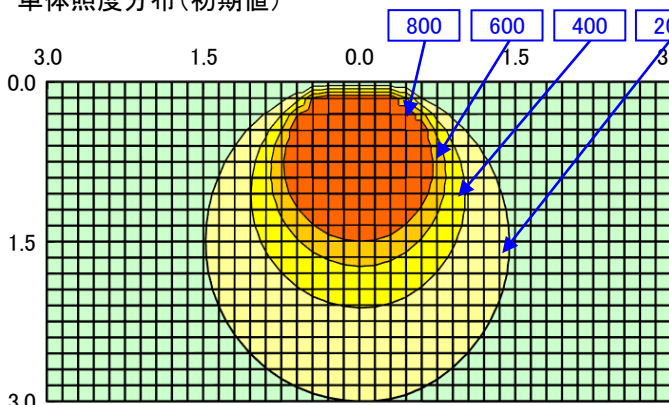

0-200
200-400
400-600
600-800
800-1000

配光曲線

(cd/1000 lm)

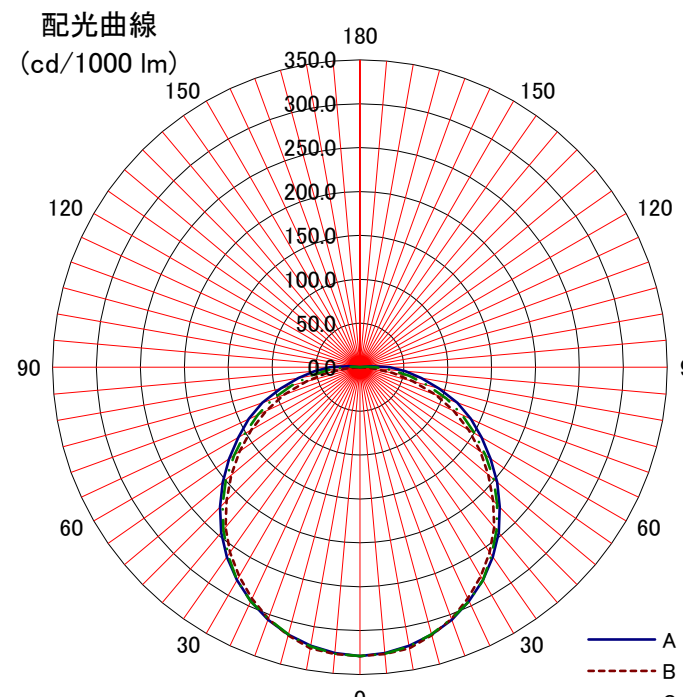

A
B
C-C'