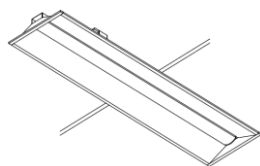
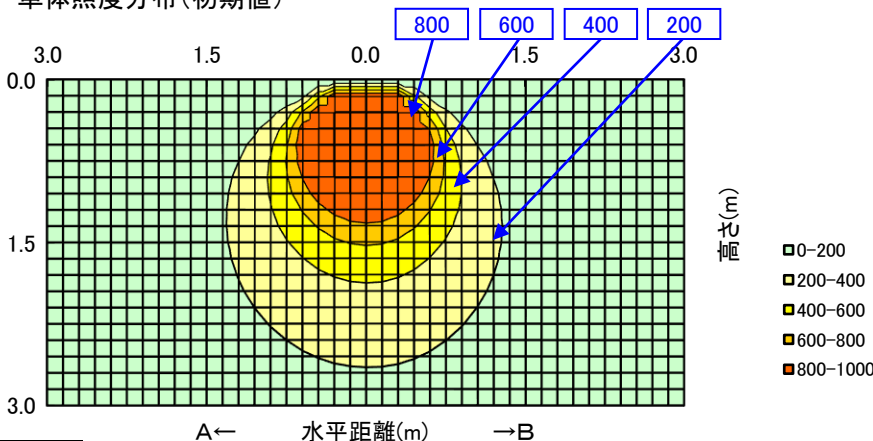
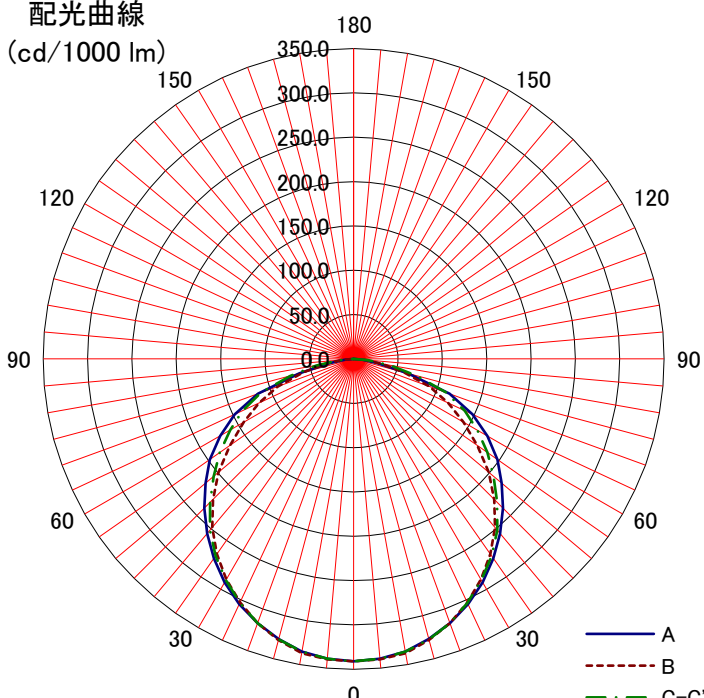


日立照明器具 照明特性

名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: TC4C	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.32	0.43	0.37	0.32	0.30	
	0.8	0.67	0.56	0.48	0.66	0.55	0.48	0.42	0.54	0.47	0.42	0.53	0.47	0.42	0.40	
姿図 	1	0.74	0.63	0.55	0.72	0.62	0.55	0.49	0.61	0.54	0.49	0.59	0.53	0.49	0.47	
	1.25	0.80	0.70	0.63	0.78	0.69	0.62	0.57	0.67	0.61	0.56	0.66	0.60	0.56	0.54	
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.62	0.71	0.66	0.62	0.59	
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.71	0.80	0.75	0.71	0.78	0.74	0.70	0.67	
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73	
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76	
光源形式	4	0.99	0.94	0.91	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81	
CET404WE-X14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85	
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.93	0.92	0.89	
4,110 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0.0%																
下方光束 Fd= 100.0%																
最大取付間隔																
A-A 1.28 H																
B-B 1.26 H																
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 														
	A-0 B-B C-0 A'-0 C'-0															
0	341 341 341															
10	335 337 335															
20	317 317 317															
30	291 287 288															
40	257 248 252															
50	218 199 206															
60	174 143 161															
70	115 91 111															
80	27 33 43															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																