
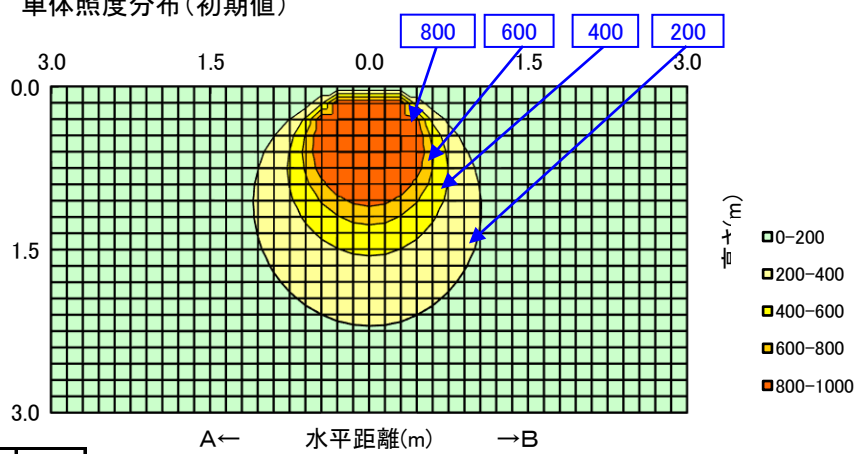
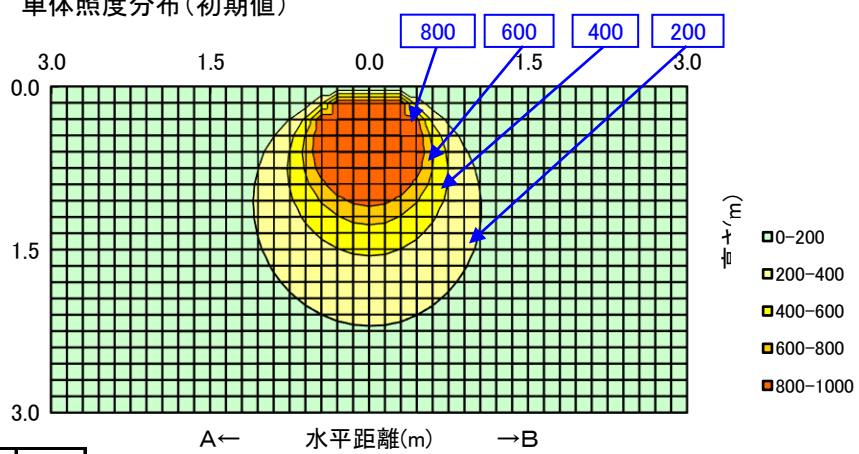
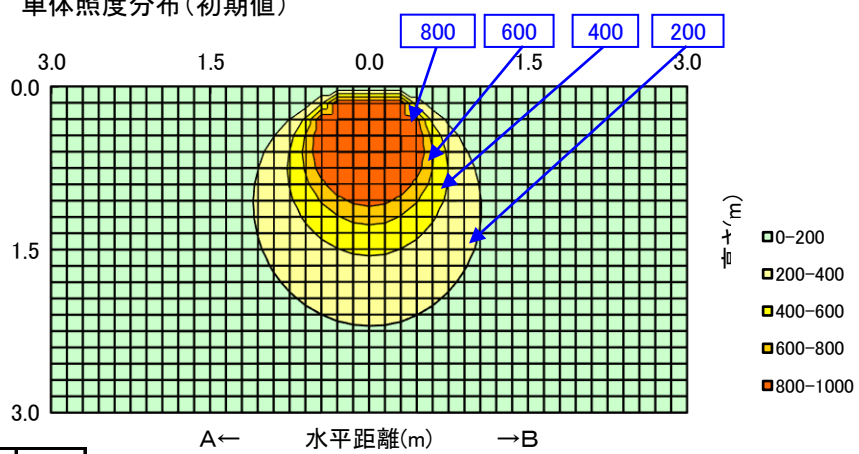
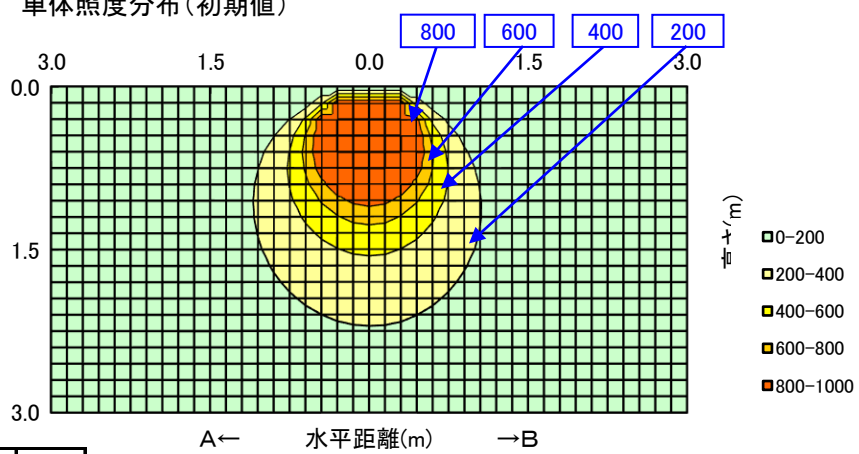
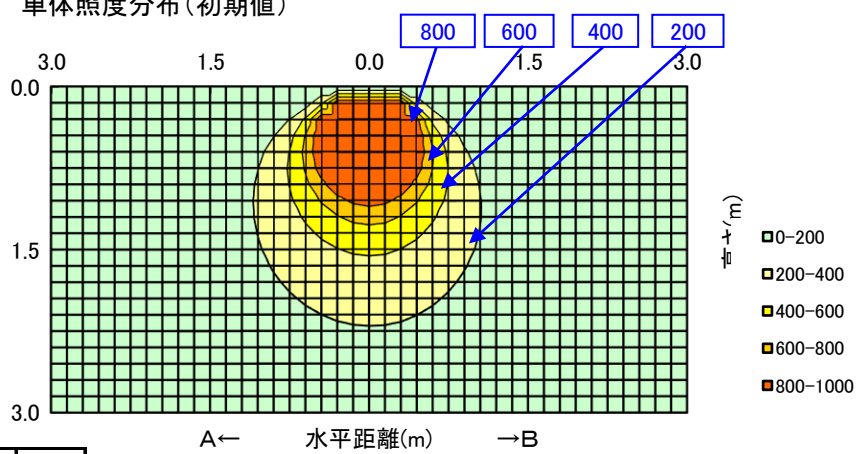


日立照明器具 照明特性																																														
名称: 交換形LED埋込形	反 射 率	天井	80%			70%				50%			30%			0%																														
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																														
		床	10%													0%																														
形式: TC4C1	室指数	固有照明率 S/H=1.0																																												
<備考>	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.32	0.43	0.37	0.32	0.30																															
	0.8	0.67	0.56	0.48	0.66	0.55	0.48	0.42	0.54	0.47	0.42	0.53	0.47	0.42	0.40																															
姿図 	1	0.74	0.63	0.55	0.72	0.62	0.55	0.49	0.61	0.54	0.49	0.59	0.53	0.49	0.47																															
	1.25	0.80	0.70	0.63	0.78	0.69	0.62	0.57	0.67	0.61	0.56	0.66	0.60	0.56	0.54																															
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.62	0.71	0.66	0.62	0.59																															
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.71	0.80	0.75	0.71	0.78	0.74	0.70	0.67																															
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73																															
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76																															
	4	0.99	0.94	0.91	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81																															
光源形式 CET403NF-N14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85																															
器具光束 2,840 lm	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.93	0.92	0.89																															
	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93																															
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																																												
上方光束 Fu= 0.0%																																														
下方光束 Fd= 100.0%																																														
最大取付間隔		<div>配光曲線</div> 																																												
A-A 1.28 H																																														
B-B 1.26 H																																														
保守率	良																0.86																													
	中	0.81																																												
	否	0.72																																												
光度 (cd/1000 lm)		<div>配光曲線</div> 																																												
	A-0																B-B	C-0	A'-0	C'-0																										
0	341																341	341																												
10	335																337	335																												
20	317	317	317																																											
30	291	287	288																																											
40	257	248	252																																											
50	218	199	206																																											
60	174	143	161																																											
70	115	91	111																																											
80	27	33	43																																											
90																																														
100																																														
110																																														
120																																														
130																																														
140																																														
150																																														
160																																														
170																																														
180																																														
配光曲線 (cd/1000 lm)		<div>配光曲線</div> 																																												
																	<div>配光曲線</div> 																													
																																<div>配光曲線</div> 