
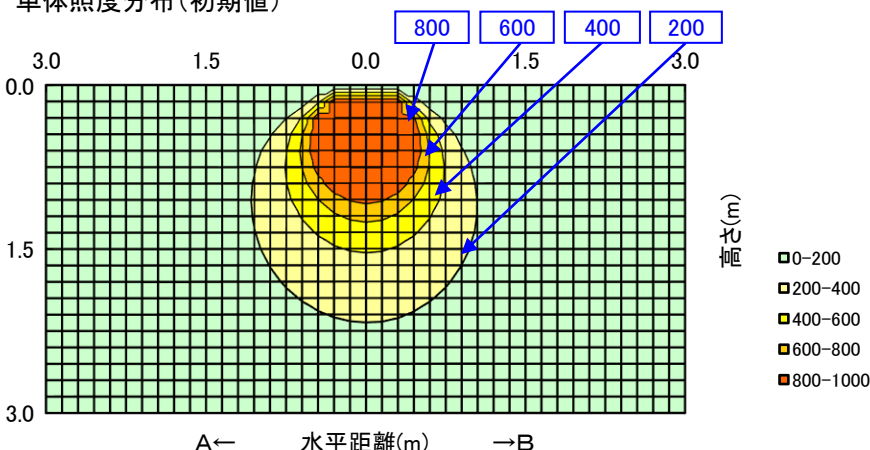
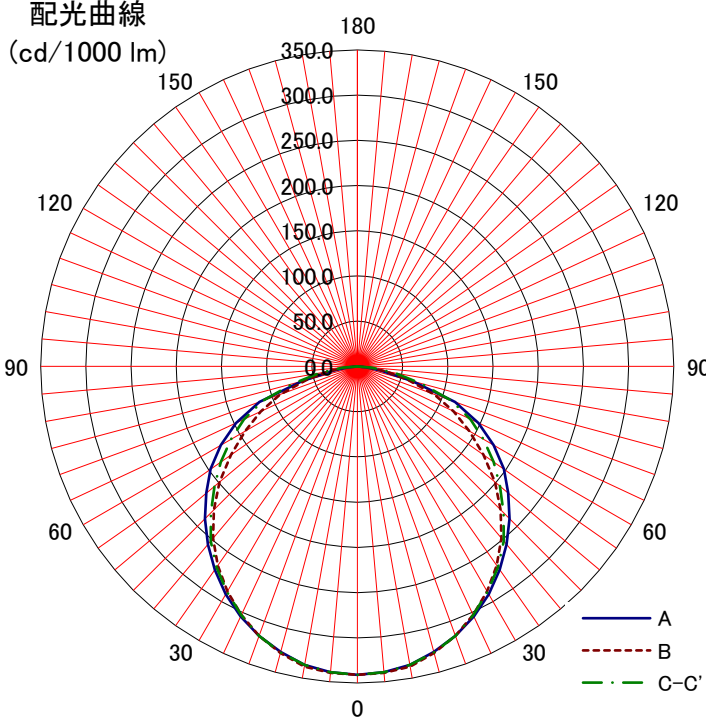


日立照明器具 照明特性																			
名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%													0%			
形式: TC4C1	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.32	0.43	0.37	0.32	0.30				
	0.8	0.67	0.56	0.48	0.66	0.55	0.48	0.42	0.54	0.47	0.42	0.53	0.47	0.42	0.40				
姿図 	1	0.74	0.63	0.55	0.72	0.62	0.55	0.49	0.61	0.54	0.49	0.59	0.53	0.49	0.47				
	1.25	0.80	0.70	0.63	0.78	0.69	0.62	0.57	0.67	0.61	0.56	0.66	0.60	0.56	0.54				
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.62	0.71	0.66	0.62	0.59				
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.71	0.80	0.75	0.71	0.78	0.74	0.70	0.67				
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73				
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76				
	4	0.99	0.94	0.91	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81				
光源形式 CET403WWF-X14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85				
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.93	0.92	0.89				
2,760 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93				
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div>  <div>0-200 200-400 400-600 600-800 800-1000</div>																	
上方光束 Fu= 0.0%																			
下方光束 Fd= 100.0%																			
最大取付間隔																			
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div>  <div>A B C-C'</div>																	
	A-0															B-B	C-0	A'-0	C'-0
0	341															341	341		
10	335															337	335		
20	317															317	317		
30	291															287	288		
40	257															248	252		
50	218															199	206		
60	174															143	161		
70	115															91	111		
80	27															33	43		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			