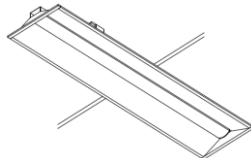
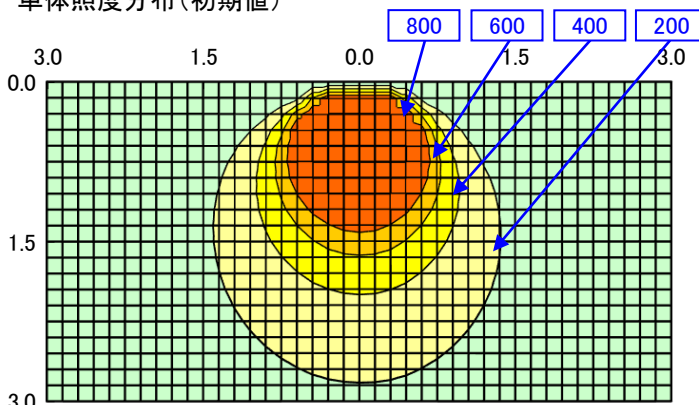
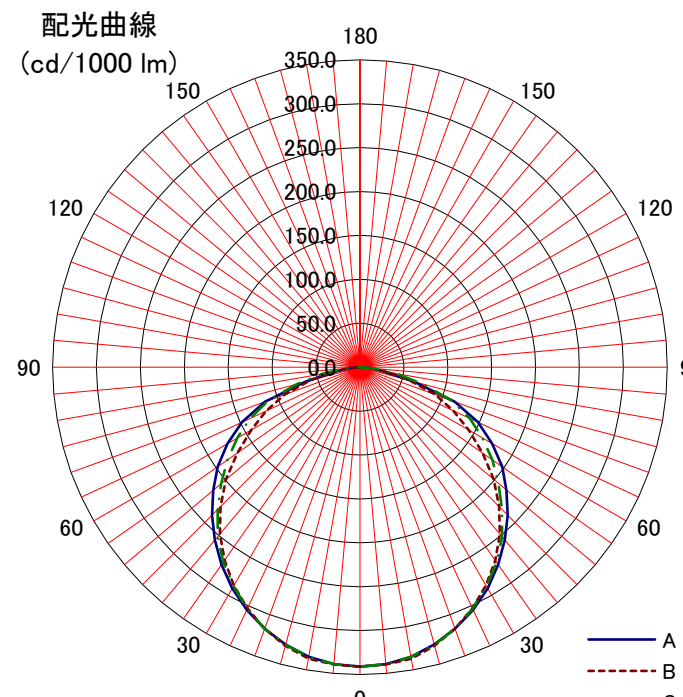


日立照明器具 照明特性

名称: 交換形LED埋込形	反射率	天井	80%				70%				50%			30%			0%																																																																																																																																									
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																																										
		床	10%														0%																																																																																																																																									
形式: TC4C1	室指数	固有照明率 S/H=1.0																																																																																																																																																								
＜備考＞	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.32	0.43	0.37	0.32	0.30																																																																																																																																											
姿図 	0.8	0.67	0.56	0.48	0.66	0.55	0.48	0.42	0.54	0.47	0.42	0.53	0.47	0.42	0.40																																																																																																																																											
	1	0.74	0.63	0.55	0.72	0.62	0.55	0.49	0.61	0.54	0.49	0.59	0.53	0.49	0.47																																																																																																																																											
	1.25	0.80	0.70	0.63	0.78	0.69	0.62	0.57	0.67	0.61	0.56	0.66	0.60	0.56	0.54																																																																																																																																											
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.62	0.71	0.66	0.62	0.59																																																																																																																																											
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.71	0.80	0.75	0.71	0.78	0.74	0.70	0.67																																																																																																																																											
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73																																																																																																																																											
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76																																																																																																																																											
光源形式	4	0.99	0.94	0.91	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81																																																																																																																																											
CET405DG-C14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85																																																																																																																																											
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.93	0.92	0.89																																																																																																																																											
4,680 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93																																																																																																																																											
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> 																																																																																																																																																								
上方光束 Fu= 0.0%																																																																																																																																																										
下方光束 Fd= 100.0%																																																																																																																																																										
最大取付間隔		<div>配光曲線 (cd/1000 lm)</div> 																																																																																																																																																								
A-A 1.28 H																																																																																																																																																										
B-B 1.26 H																																																																																																																																																										
保守率	良	0.86	<table><tr><th colspan="2">光度 (cd/1000 lm)</th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td></td><td>341</td><td>341</td><td>341</td><td></td><td></td></tr><tr><td>10</td><td></td><td>335</td><td>337</td><td>335</td><td></td><td></td></tr><tr><td>20</td><td></td><td>317</td><td>317</td><td>317</td><td></td><td></td></tr><tr><td>30</td><td></td><td>291</td><td>287</td><td>288</td><td></td><td></td></tr><tr><td>40</td><td></td><td>257</td><td>248</td><td>252</td><td></td><td></td></tr><tr><td>50</td><td></td><td>218</td><td>199</td><td>206</td><td></td><td></td></tr><tr><td>60</td><td></td><td>174</td><td>143</td><td>161</td><td></td><td></td></tr><tr><td>70</td><td></td><td>115</td><td>91</td><td>111</td><td></td><td></td></tr><tr><td>80</td><td></td><td>27</td><td>33</td><td>43</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>												光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0	0		341	341	341			10		335	337	335			20		317	317	317			30		291	287	288			40		257	248	252			50		218	199	206			60		174	143	161			70		115	91	111			80		27	33	43			90							100							110							120							130							140							150							160							170							180						
光度 (cd/1000 lm)		A-0													B-B	C-0	A'-0	C'-0																																																																																																																																								
0		341													341	341																																																																																																																																										
10		335	337	335																																																																																																																																																						
20		317	317	317																																																																																																																																																						
30		291	287	288																																																																																																																																																						
40		257	248	252																																																																																																																																																						
50		218	199	206																																																																																																																																																						
60		174	143	161																																																																																																																																																						
70		115	91	111																																																																																																																																																						
80		27	33	43																																																																																																																																																						
90																																																																																																																																																										
100																																																																																																																																																										
110																																																																																																																																																										
120																																																																																																																																																										
130																																																																																																																																																										
140																																																																																																																																																										
150																																																																																																																																																										
160																																																																																																																																																										
170																																																																																																																																																										
180																																																																																																																																																										
	中	0.81																																																																																																																																																								
	否	0.72																																																																																																																																																								