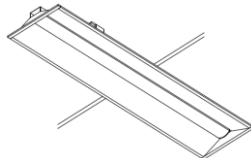
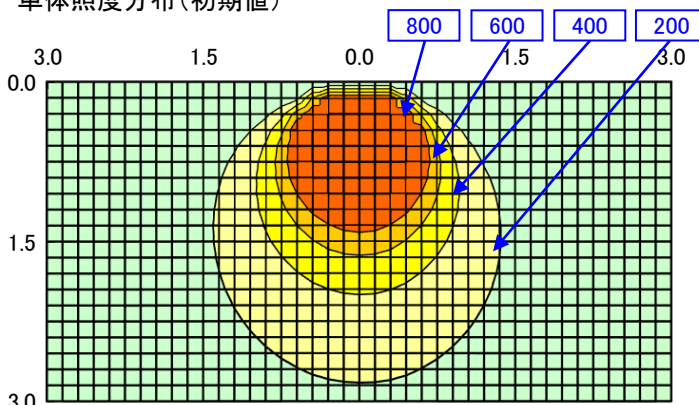
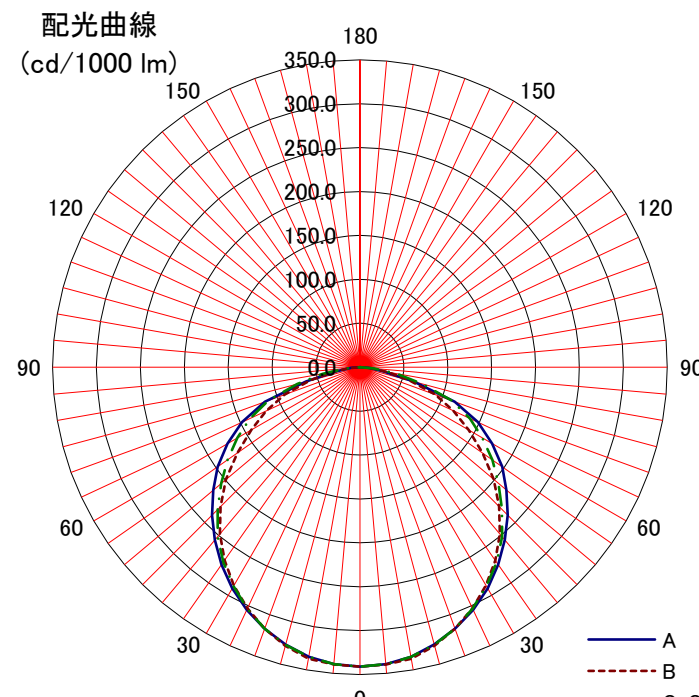


# 日立照明器具 照明特性

名称: 交換形LED埋込形		天井	80%			70%				50%			30%			0%
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%
形式: TC4C1		床	10%													0%
			固有照明率 S/H=1.0													
＜備考＞		0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.32	0.43	0.37	0.32	0.30
		0.8	0.67	0.56	0.48	0.66	0.55	0.48	0.42	0.54	0.47	0.42	0.53	0.47	0.42	0.40
姿図 		1	0.74	0.63	0.55	0.72	0.62	0.55	0.49	0.61	0.54	0.49	0.59	0.53	0.49	0.47
		1.25	0.80	0.70	0.63	0.78	0.69	0.62	0.57	0.67	0.61	0.56	0.66	0.60	0.56	0.54
		1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.62	0.71	0.66	0.62	0.59
		2	0.90	0.83	0.77	0.88	0.82	0.76	0.71	0.80	0.75	0.71	0.78	0.74	0.70	0.67
		2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73
		3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76
光源形式		4	0.99	0.94	0.91	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81
CET405DG-N14A		5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85
器具光束		7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.93	0.92	0.89
4,680 lm		10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div>  <div>0-200 200-400 400-600 600-800 800-1000</div>														
上方光束 Fu= 0.0%																
下方光束 Fd= 100.0%																
最大取付間隔		<div>配光曲線 (cd/1000 lm)</div>  <div>A B C-C'</div>														
A-A 1.28 H																
B-B 1.26 H																
保守率	良	0.86														
	中	0.81														
保守率	否	0.72														
	光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0									
0		341	341	341												
10		335	337	335												
20		317	317	317												
30		291	287	288												
40		257	248	252												
50		218	199	206												
60		174	143	161												
70		115	91	111												
80		27	33	43												
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																