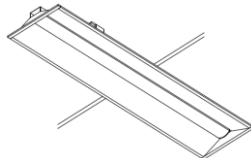
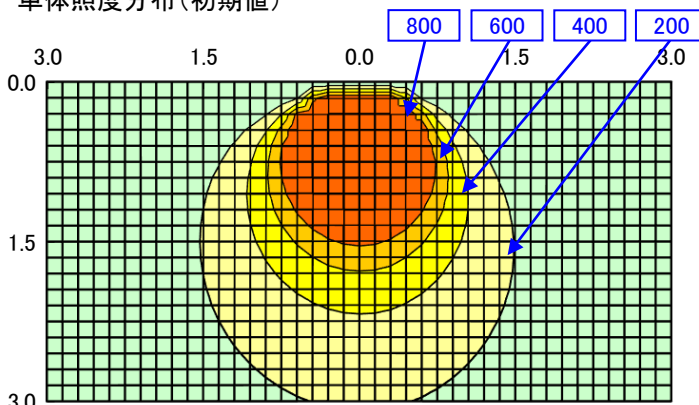
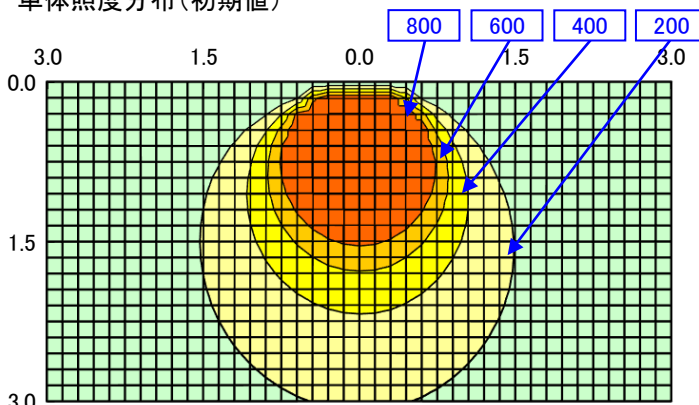
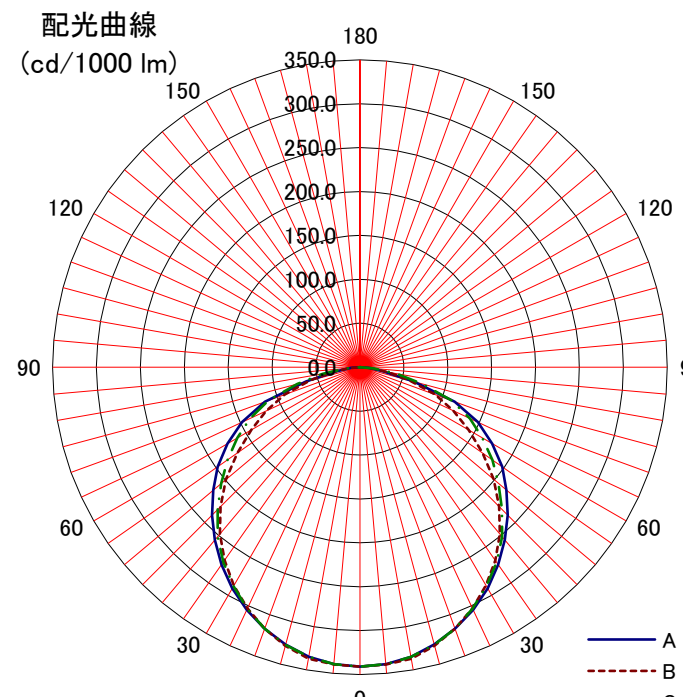
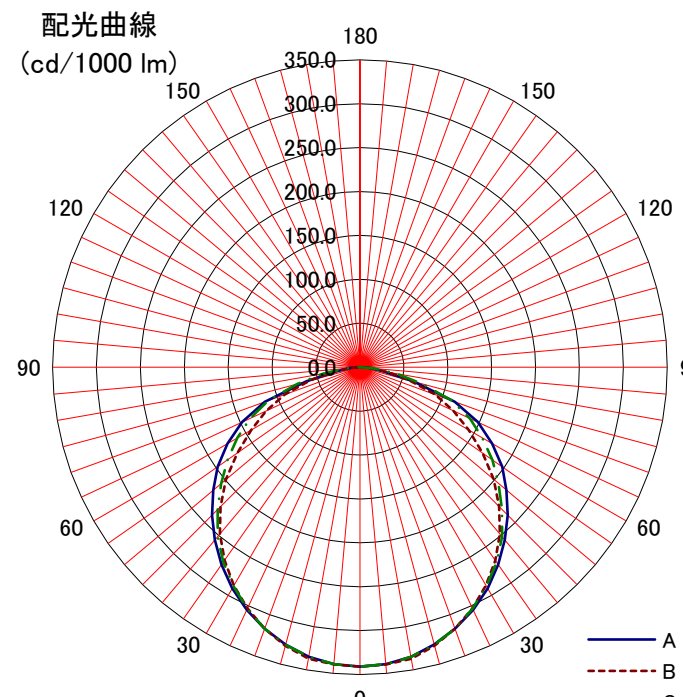


日立照明器具 照明特性

名称: 交換形LED埋込形	反射率	天井	80%				70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: TC4C1	室指数	固有照明率 S/H=1.0																	
＜備考＞	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.32	0.43	0.37	0.32	0.30				
姿図 	0.8	0.67	0.56	0.48	0.66	0.55	0.48	0.42	0.54	0.47	0.42	0.53	0.47	0.42	0.40				
	1	0.74	0.63	0.55	0.72	0.62	0.55	0.49	0.61	0.54	0.49	0.59	0.53	0.49	0.47				
	1.25	0.80	0.70	0.63	0.78	0.69	0.62	0.57	0.67	0.61	0.56	0.66	0.60	0.56	0.54				
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.62	0.71	0.66	0.62	0.59				
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.71	0.80	0.75	0.71	0.78	0.74	0.70	0.67				
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73				
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76				
光源形式	4	0.99	0.94	0.91	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81				
CET406WG-N14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85				
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.93	0.92	0.89				
5,570 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93				
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> 																	
上方光束 Fu= 0.0%																			
下方光束 Fd= 100.0%																			
最大取付間隔		<div>単位照度分布 (初期値)</div> 																	
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.86	<div>配光曲線 (cd/1000 lm)</div> 																
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div> 																	
	A-0															B-B	C-0	A'-0	C'-0
0	341	341	341																
10	335	337	335																
20	317	317	317																
30	291	287	288																
40	257	248	252																
50	218	199	206																
60	174	143	161																
70	115	91	111																
80	27	33	43																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			