
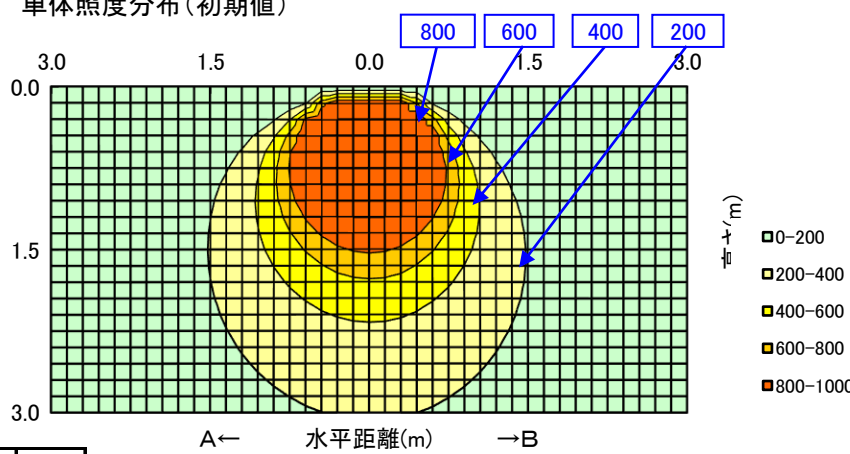
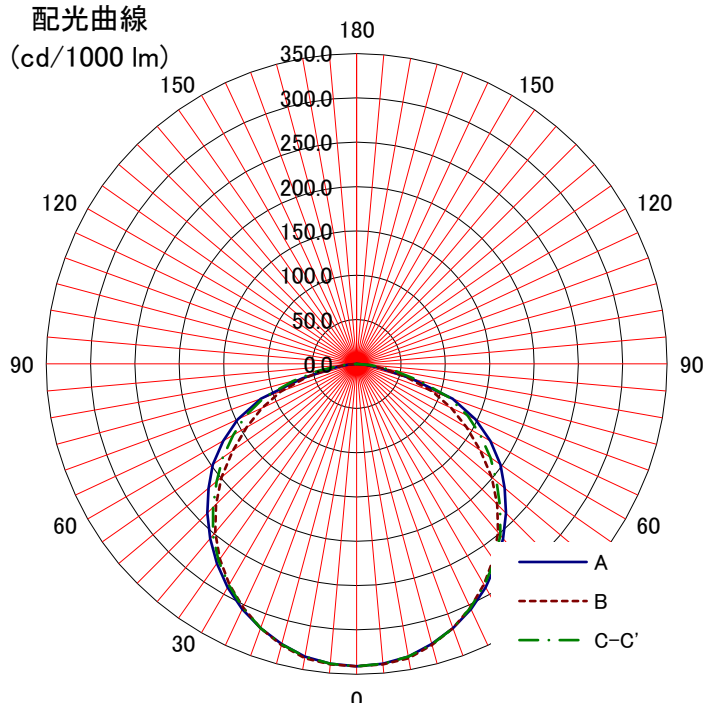


# 日立照明器具 照明特性

|   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
|---|--------|--|------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|
| 名称: 交換形LED埋込形   | 反射率    | 天井   | 80%  |      |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |    | 0% |
|   |        | 壁  | 70%  | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |    |
|   |        | 床  | 10%  |      |      |      |      |      |      |      |      |      |      |      |      |    | 0% |
| 形式: TC4C1   | 室指数    | 固有照明率 S/H=1.0  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| ＜備考＞  | 0.6    | 0.58   | 0.46 | 0.38 | 0.57 | 0.45 | 0.38 | 0.33 | 0.44 | 0.37 | 0.32 | 0.43 | 0.37 | 0.32 | 0.30 |    |    |
|   | 0.8    | 0.67   | 0.56 | 0.48 | 0.66 | 0.55 | 0.48 | 0.42 | 0.54 | 0.47 | 0.42 | 0.53 | 0.47 | 0.42 | 0.40 |    |    |
| 姿図<br> | 1      | 0.74   | 0.63 | 0.55 | 0.72 | 0.62 | 0.55 | 0.49 | 0.61 | 0.54 | 0.49 | 0.59 | 0.53 | 0.49 | 0.47 |    |    |
|   | 1.25   | 0.80   | 0.70 | 0.63 | 0.78 | 0.69 | 0.62 | 0.57 | 0.67 | 0.61 | 0.56 | 0.66 | 0.60 | 0.56 | 0.54 |    |    |
|   | 1.5    | 0.84   | 0.76 | 0.69 | 0.83 | 0.75 | 0.68 | 0.63 | 0.73 | 0.67 | 0.62 | 0.71 | 0.66 | 0.62 | 0.59 |    |    |
|   | 2      | 0.90   | 0.83 | 0.77 | 0.88 | 0.82 | 0.76 | 0.71 | 0.80 | 0.75 | 0.71 | 0.78 | 0.74 | 0.70 | 0.67 |    |    |
|   | 2.5    | 0.93   | 0.87 | 0.82 | 0.92 | 0.86 | 0.81 | 0.77 | 0.84 | 0.80 | 0.76 | 0.82 | 0.78 | 0.75 | 0.73 |    |    |
|   | 3      | 0.96   | 0.90 | 0.86 | 0.94 | 0.89 | 0.85 | 0.81 | 0.87 | 0.83 | 0.80 | 0.85 | 0.82 | 0.79 | 0.76 |    |    |
| 光源形式  | 4      | 0.99   | 0.94 | 0.91 | 0.97 | 0.93 | 0.90 | 0.86 | 0.91 | 0.88 | 0.85 | 0.89 | 0.86 | 0.84 | 0.81 |    |    |
| CET406WWE-N14A  | 5      | 1.01   | 0.97 | 0.94 | 0.99 | 0.96 | 0.93 | 0.90 | 0.94 | 0.91 | 0.89 | 0.92 | 0.89 | 0.87 | 0.85 |    |    |
| 器具光束  | 7      | 1.03   | 1.01 | 0.98 | 1.02 | 0.99 | 0.97 | 0.95 | 0.97 | 0.95 | 0.94 | 0.95 | 0.93 | 0.92 | 0.89 |    |    |
| 5,510 lm  | 10     | 1.05   | 1.03 | 1.02 | 1.04 | 1.02 | 1.01 | 0.99 | 1.00 | 0.99 | 0.97 | 0.98 | 0.97 | 0.96 | 0.93 |    |    |
| 器具効率 Ft= 100%   |        | 単体照度分布(初期値)<br>           |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 上方光束 Fu= 0.0%   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 下方光束 Fd= 100.0%   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 最大取付間隔  |        | 光度 (cd/1000 lm)  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| A-A 1.28 H  |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| B-B 1.26 H  |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 保守率   | 良 0.86 | 配光曲線<br>(cd/1000 lm)<br> |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 中 0.81  |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 否 0.72  |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 光度 (cd/1000 lm)   |        | A-0  | B-B  | C-0  | A'-0 | C'-0 |      |      |      |      |      |      |      |      |      |    |    |
| 0   | 341    | 341  | 341  |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 10  | 335    | 337  | 335  |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 20  | 317    | 317  | 317  |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 30  | 291    | 287  | 288  |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 40  | 257    | 248  | 252  |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 50  | 218    | 199  | 206  |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 60  | 174    | 143  | 161  |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 70  | 115    | 91   | 111  |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 80  | 27     | 33   | 43   |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 90  |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 100   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 110   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 120   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 130   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 140   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 150   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 160   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 170   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| 180   |        |  |      |      |      |      |      |      |      |      |      |      |      |      |      |    |    |