
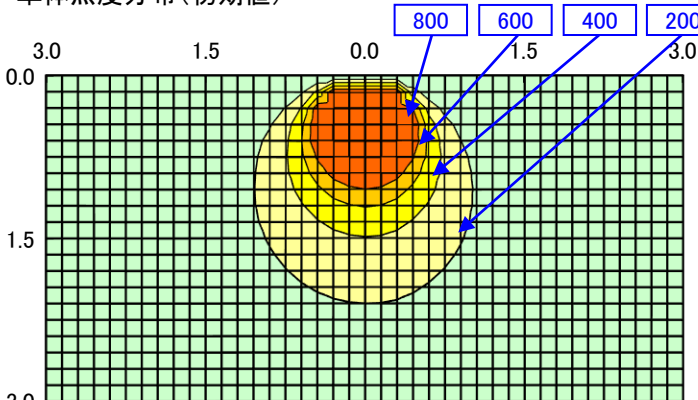


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井 反射率 壁 床	80%			70%				50%			30%			0%
		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		10%													0%
形式: WGN4B1	室指数	固有照明率 S/H=1.0													
<備考>	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27
	0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35
	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42
姿図 	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69
光源形式 WGE403WWF-N14A1	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74
器具光束 2,910 lm	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77
	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82
器具効率 Ft= 100%	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86
上方光束 Fu= 5.2%	単体照度分布 (初期値) 														
下方光束 Fd= 94.8%															
最大取付間隔															
A-A 1.28 H															
B-B 1.26 H															
保守率	良	0.88													
	中	0.86													
	否	0.81													
光度 (cd/1000 lm)															
	A-0	B-B	C-0	A'-0	C'-0										
0	303	303	303												
10	297	300	298												
20	283	282	282												
30	260	257	257												
40	230	221	225												
50	193	176	185												
60	160	130	142												
70	119	81	102												
80	83	30	62												
90	54	1	33												
100	33		17												
110	18		7												
120	11		5												
130	6		4												
140	4		3												
150	4		2												
160															
170															
180															
配光曲線 (cd/1000 lm)		