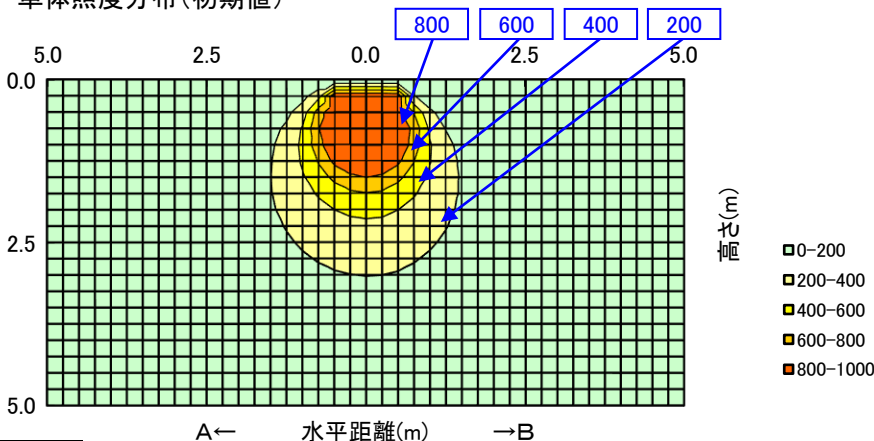


# 日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	反射率	80%			70%				50%			30%			0%				
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
			床	10%														0%		
形式: WGN8B1		室指数	固有照明率 S/H=1.0																	
<備考> 防湿・防雨形 (オイルミスト対応)	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27					
	0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35					
姿図	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42					
	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48					
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53					
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60					
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65					
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69					
光源形式 WGE403NF-N14A1	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74					
	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77					
器具光束 6,000 lm	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82					
	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86					
器具効率 Ft= 100%		単体照度分布 (初期値)																		
上方光束 Fu= 5.2%																				
下方光束 Fd= 94.8%																				
最大取付間隔																				
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良	0.88																		
	中	0.86																		
	否	0.81																		
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)																		
A-0	B-B																C-0	A'-0	C'-0	
0	303																303	303		
10	297																300	298		
20	283	282	282																	
30	260	257	257																	
40	230	221	225																	
50	193	176	185																	
60	160	130	142																	
70	119	81	102																	
80	83	30	62																	
90	54	1	33																	
100	33		17																	
110	18		7																	
120	11		5																	
130	6		4																	
140	4		3																	
150	4		2																	
160																				
170																				
180																				