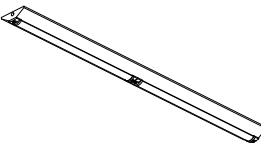
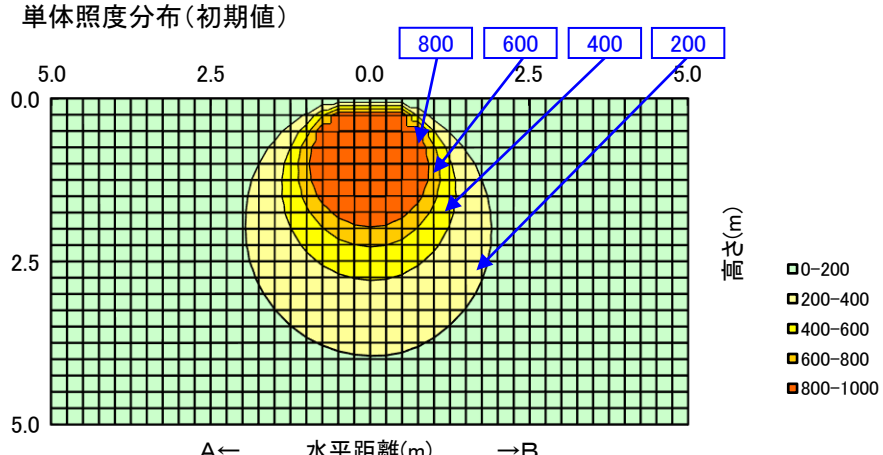
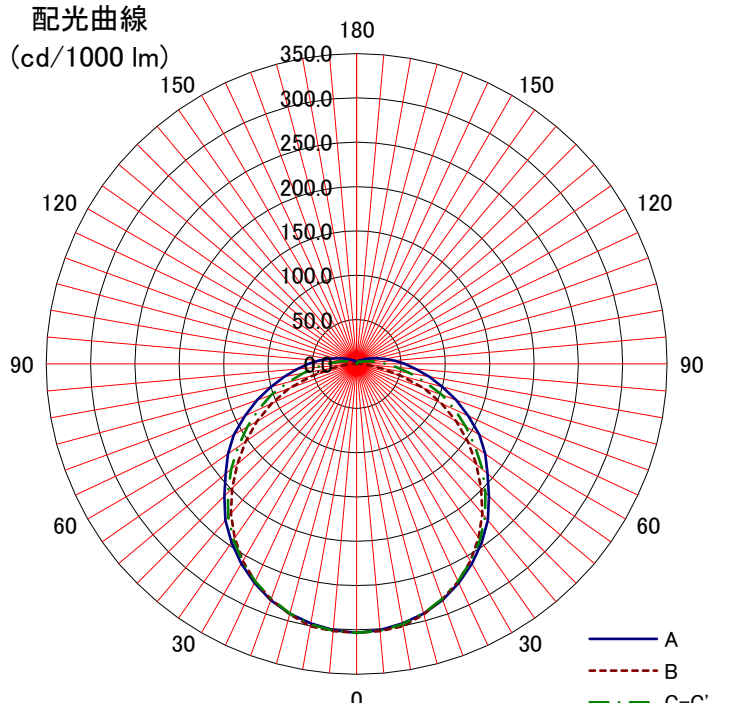


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	反射率	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
																		床
形式: WGN8B1			10%															0%
<備考> 防湿・防雨形 (オイルミスト対応)	室指数	固有照明率 S/H=1.0																
			0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27	
			0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35	
姿図 	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42			
	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48			
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53			
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60			
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65			
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69			
光源形式 WGE405WE-N14A1	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74			
	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77			
器具光束 10,280 lm	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82			
	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86			
器具効率 Ft= 100%			単体照度分布(初期値) 															
上方光束 Fu= 5.2%																		
下方光束 Fd= 94.8%																		
最大取付間隔																		
A-A 1.28 H																		
B-B 1.26 H																		
保守率	良	0.88																
	中	0.86																
	否	0.81																
光度 (cd/1000 lm)																		
	A-0	B-B	C-0	A'-0	C'-0													
0	303	303	303															
10	297	300	298															
20	283	282	282															
30	260	257	257															
40	230	221	225															
50	193	176	185															
60	160	130	142															
70	119	81	102															
80	83	30	62															
90	54	1	33															
100	33		17															
110	18		7															
120	11		5															
130	6		4															
140	4		3															
150	4		2															
160																		
170																		
180																		
			配光曲線 (cd/1000 lm) 															
			A B C-C'															