

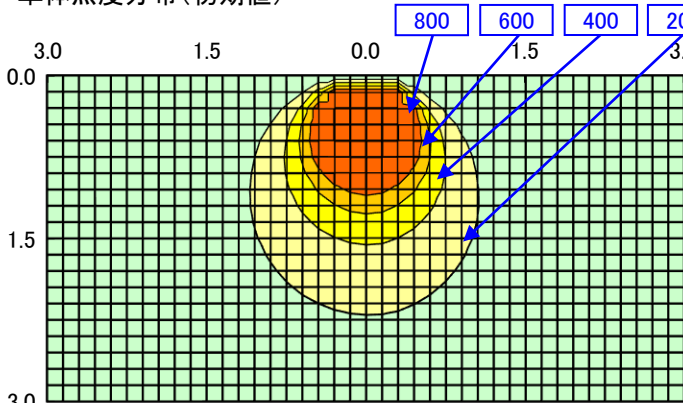
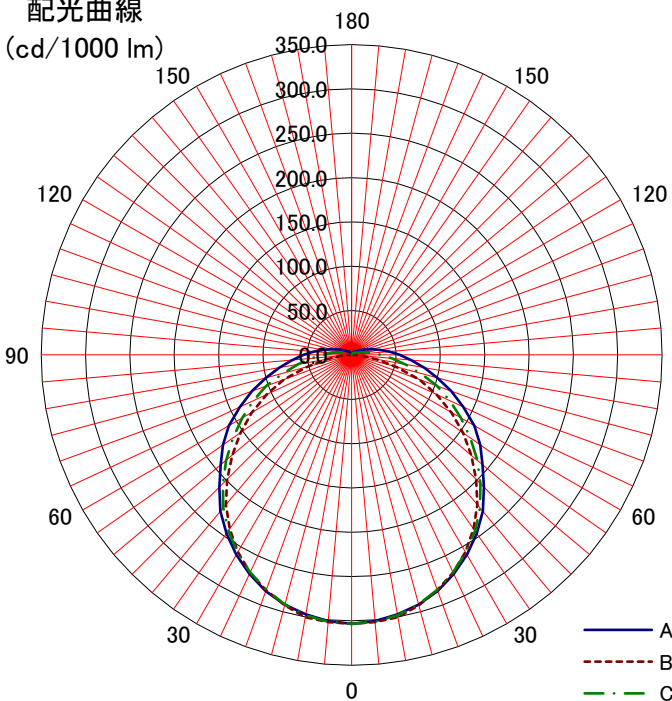


日立照明器具 照明特性

名称: 交換形LEDトラフ形	天井 反射率 壁 床	80%			70%				50%			30%			0%	
		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		10%														0%
形式: WGP2A	室指数	固有照明率 S/H=1.0														
＜備考＞ 防湿・防雨形 (オイルミスト対応)	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27	
	0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35	
姿図 	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42	
	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48	
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53	
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60	
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65	
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69	
光源形式	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74	
WGE203NE-N14A	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77	
器具光束	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82	
3,200 lm	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86	
器具効率 Ft= 100%		単位照度分布 (初期値)														
上方光束 Fu= 5.2%																
下方光束 Fd= 94.8%		A← 水平距離(m) →B														
最大取付間隔		(E)lx														
A-A 1.28 H		■0-200														
B-B 1.26 H		■200-400														
保守率	良	0.88	■400-600													
	中	0.86	■600-800													
	否	0.81	■800-1000													
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)														
	A-0	B-B	C-0	A'-0	C'-0											
	0	303	303	303		— A										
	10	297	300	298		- - - B										
	20	283	282	282		. . . C-C'										
	30	260	257	257												
	40	230	221	225												
	50	193	176	185												
	60	160	130	142												
	70	119	81	102												
	80	83	30	62												
	90	54	1	33												
	100	33		17												
	110	18		7												
	120	11		5												
	130	6		4												
	140	4		3												
	150	4		2												
	160															
	170															
	180															

単体照度分布(初期値)

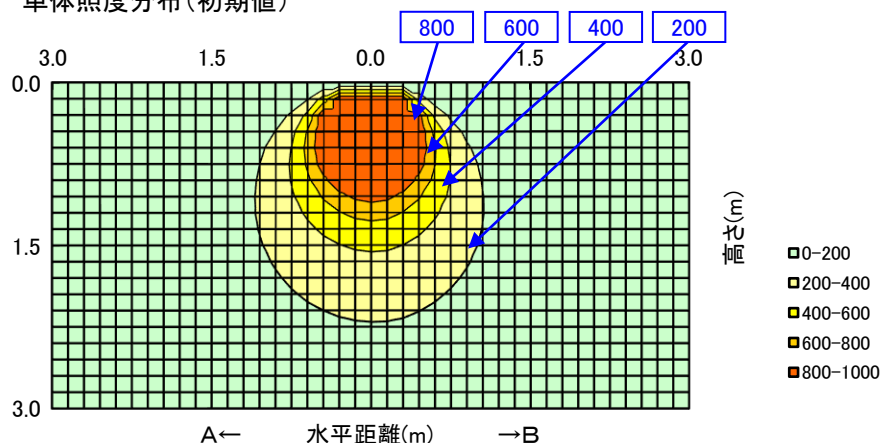

配光曲線
(cd/1000 lm)

