
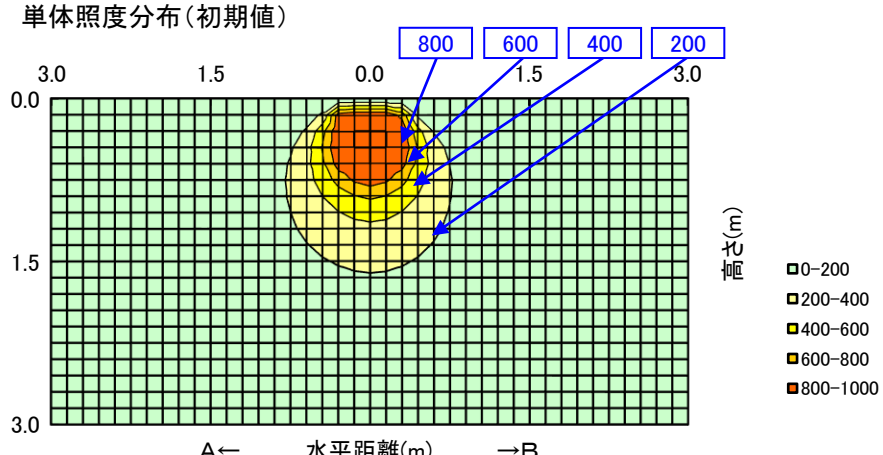
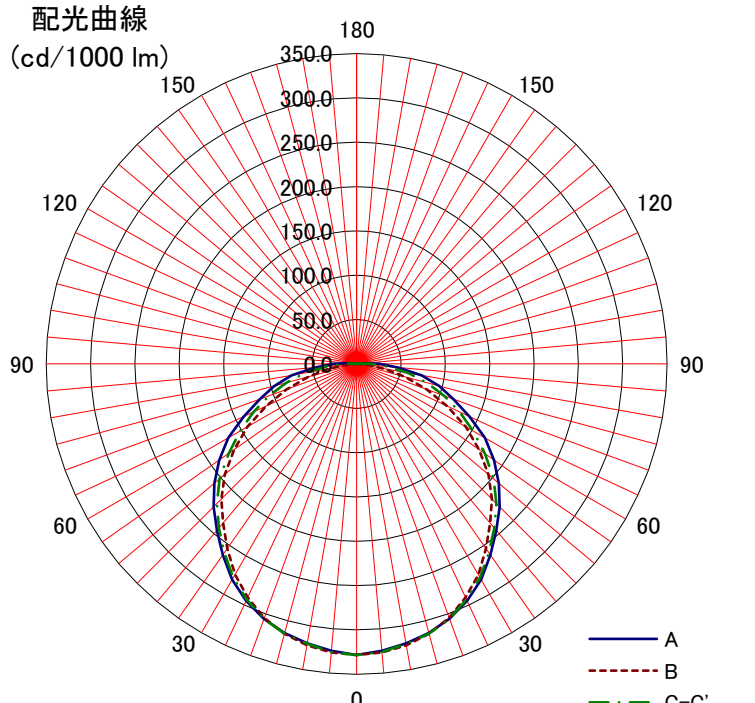


日立照明器具 照明特性

名称: 交換形LED笠付形		天井	80%			70%				50%			30%			0%																																																																																																																									
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: WGP2B		反射率	床	10%												0%																																																																																																																									
				固有照明率 S/H=1.0																																																																																																																																					
<備考> 防湿・防雨形 (オイルミスト対応)		室指数	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29																																																																																																																								
		0.8 <td>0.67</td> <td>0.55</td> <td>0.47</td> <td>0.65</td> <td>0.54</td> <td>0.47</td> <td>0.41</td> <td>0.53</td> <td>0.46</td> <td>0.41</td> <td>0.51</td> <td>0.45</td> <td>0.40</td> <td>0.38</td>	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38																																																																																																																									
姿図 		1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45																																																																																																																									
		1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.55	0.64	0.59	0.54	0.52																																																																																																																									
		1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57																																																																																																																									
		2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65																																																																																																																									
		2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70																																																																																																																									
		3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.74																																																																																																																									
光源形式 WGE201WE-N14A		4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79																																																																																																																									
		5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.82																																																																																																																									
器具光束 1,570 lm		7	1.02	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87																																																																																																																									
		10	1.04	1.02	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91																																																																																																																									
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 																																																																																																																																						
上方光束 Fu= 0.6%																																																																																																																																									
下方光束 Fd= 99.4%																																																																																																																																									
最大取付間隔			<div>配光曲線 (cd/1000 lm)</div> 																																																																																																																																						
A-A 1.28 H																																																																																																																																									
B-B 1.24 H																																																																																																																																									
保守率	良	0.86	<div>光度 (cd/1000 lm)</div> <table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>328</td><td>328</td><td>328</td><td></td><td></td></tr><tr><td>10</td><td>320</td><td>322</td><td>320</td><td></td><td></td></tr><tr><td>20</td><td>306</td><td>305</td><td>306</td><td></td><td></td></tr><tr><td>30</td><td>281</td><td>274</td><td>278</td><td></td><td></td></tr><tr><td>40</td><td>245</td><td>234</td><td>241</td><td></td><td></td></tr><tr><td>50</td><td>209</td><td>194</td><td>202</td><td></td><td></td></tr><tr><td>60</td><td>167</td><td>142</td><td>152</td><td></td><td></td></tr><tr><td>70</td><td>116</td><td>85</td><td>105</td><td></td><td></td></tr><tr><td>80</td><td>75</td><td>33</td><td>60</td><td></td><td></td></tr><tr><td>90</td><td>26</td><td></td><td>16</td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>																A-0	B-B	C-0	A'-0	C'-0	0	328	328	328			10	320	322	320			20	306	305	306			30	281	274	278			40	245	234	241			50	209	194	202			60	167	142	152			70	116	85	105			80	75	33	60			90	26		16			100						110						120						130						140						150						160						170						180					
		A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
	0	328																328	328																																																																																																																						
10	320	322																320																																																																																																																							
20	306	305																306																																																																																																																							
30	281	274																278																																																																																																																							
40	245	234																241																																																																																																																							
50	209	194																202																																																																																																																							
60	167	142																152																																																																																																																							
70	116	85																105																																																																																																																							
80	75	33	60																																																																																																																																						
90	26		16																																																																																																																																						
100																																																																																																																																									
110																																																																																																																																									
120																																																																																																																																									
130																																																																																																																																									
140																																																																																																																																									
150																																																																																																																																									
160																																																																																																																																									
170																																																																																																																																									
180																																																																																																																																									
中	0.81																																																																																																																																								
否	0.72																																																																																																																																								