
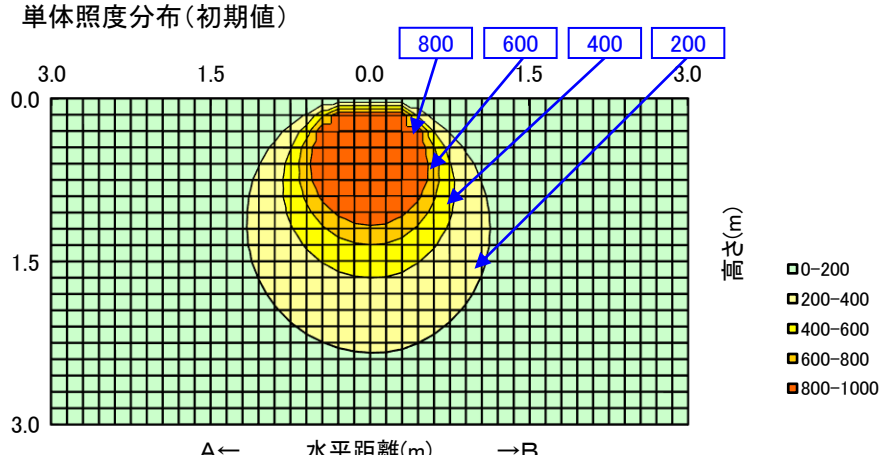
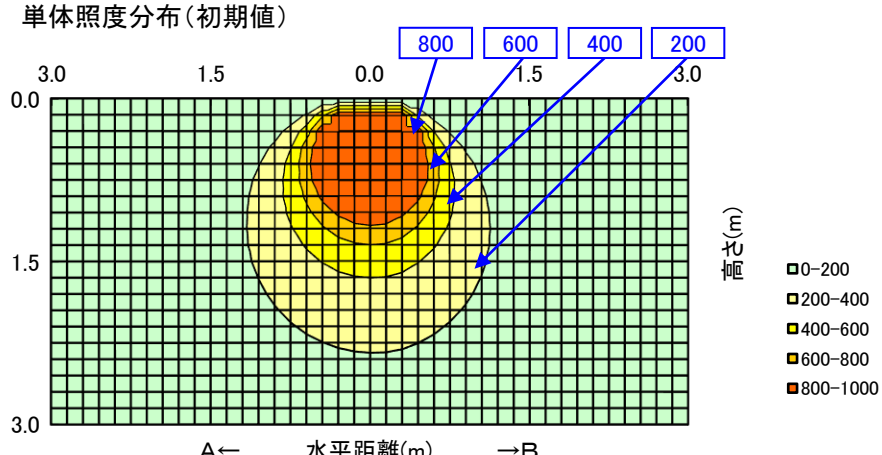


日立照明器具 照明特性																																	
名称: 交換形LEDトラフ形	反 射 率	天井	80%			70%				50%			30%			0%																	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																	
		床	10%													0%																	
形式: WGP4A1	室指数		固有照明率 S/H=1.0																														
<備考> 防湿・防雨形 (オイルミスト対応)	0.6		0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27																	
	0.8		0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35																	
姿図 	1		0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42																	
	1.25		0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48																	
	1.5		0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53																	
	2		0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60																	
	2.5		0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65																	
	3		0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69																	
光源形式 WGE403DE-N14A1	4		0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74																	
	5		0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77																	
器具光束 3,610 lm	7		1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82																	
	10		1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86																	
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 																														
上方光束 Fu= 5.2%																																	
下方光束 Fd= 94.8%																																	
最大取付間隔			<div>配光曲線 (cd/1000 lm)</div> 																														
A-A 1.28 H																																	
B-B 1.26 H																																	
保守率	良	0.88	<div>単位 (m)</div>																														
	中	0.86																															
	否	0.81																															
光度 (cd/1000 lm)																	<div>単位 (m)</div>																
	A-0	B-B																													C-0	A'-0	C'-0
0	303	303																													303		
10	297	300																													298		
20	283	282																													282		
30	260	257																													257		
40	230	221																													225		
50	193	176																													185		
60	160	130																													142		
70	119	81																													102		
80	83	30																													62		
90	54	1																													33		
100	33																														17		
110	18																														7		
120	11																														5		
130	6																														4		
140	4																														3		
150	4																														2		
160																																	
170																																	
180																																	