
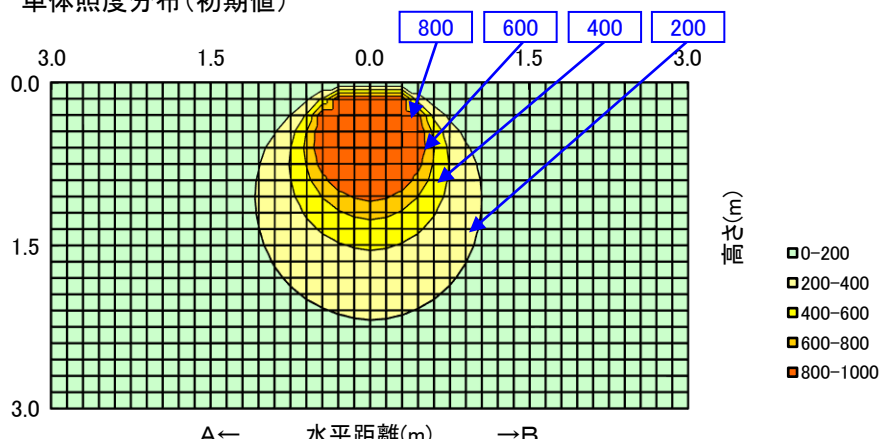
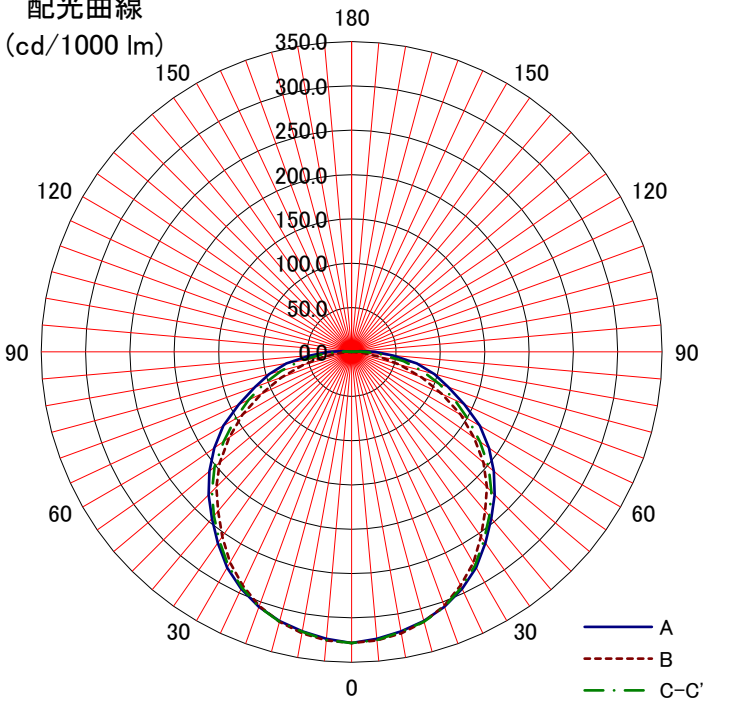


# 日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井	80%			70%				50%			30%			0%													
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%													
	床	10%														0%													
形式: WGP4B1	室指数	固有照明率 S/H=1.0																											
＜備考＞	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29														
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38														
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45														
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.55	0.64	0.59	0.54	0.52														
	1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57														
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65														
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70														
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.74														
光源形式	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79														
WGE403WF-N14A1	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.82														
器具光束	7	1.02	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87														
2,910 lm	10	1.04	1.02	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91														
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																											
上方光束 Fu= 0.6%																													
下方光束 Fd= 99.4%																													
最大取付間隔		<div>配光曲線 (cd/1000 lm)</div> 																											
A-A 1.28 H																													
B-B 1.24 H																													
保守率	良	0.86	A← 水平距離(m) →B																										
	中	0.81																											
	否	0.72																											
光度 (cd/1000 lm)		A← 水平距離(m) →B																											
A-0																A← 水平距離(m) →B													
B-B																													
C-0																													
A'-0		A← 水平距離(m) →B																											
C'-0																													
0		328	328	328	A← 水平距離(m) →B																								
10		320	322	320	A← 水平距離(m) →B																								
20		306	305	306	A← 水平距離(m) →B																								
30		281	274	278	A← 水平距離(m) →B																								
40		245	234	241	A← 水平距離(m) →B																								
50		209	194	202	A← 水平距離(m) →B																								
60		167	142	152	A← 水平距離(m) →B																								
70		116	85	105	A← 水平距離(m) →B																								
80		75	33	60	A← 水平距離(m) →B																								
90		26		16	A← 水平距離(m) →B																								
100					A← 水平距離(m) →B																								
110					A← 水平距離(m) →B																								
120					A← 水平距離(m) →B																								
130					A← 水平距離(m) →B																								
140					A← 水平距離(m) →B																								
150					A← 水平距離(m) →B																								
160					A← 水平距離(m) →B																								
170					A← 水平距離(m) →B																								
180					A← 水平距離(m) →B																								