
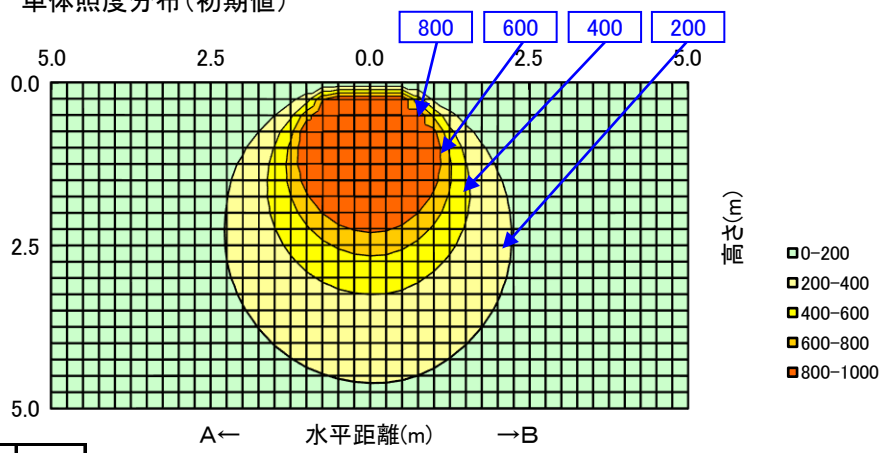
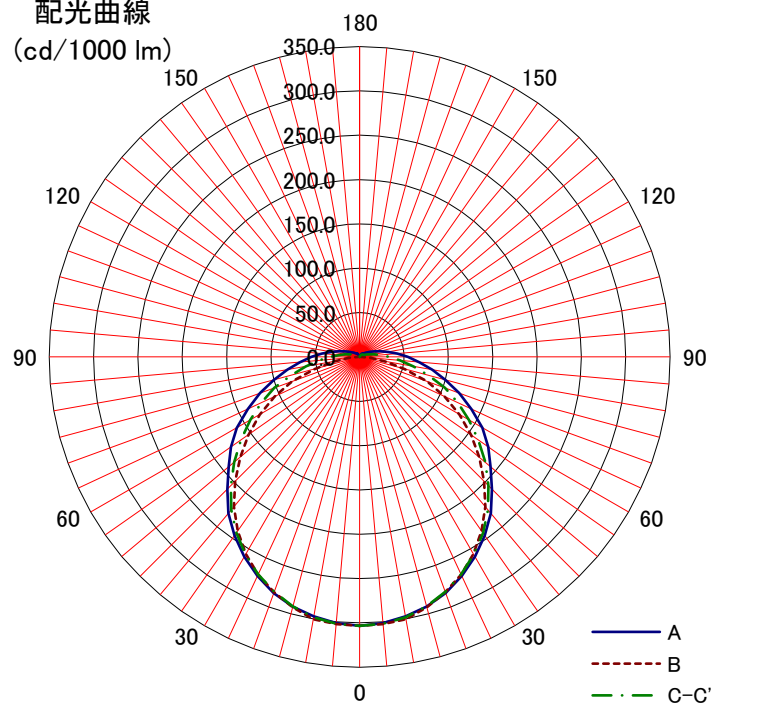


日立照明器具 照明特性																		
名称: 交換形LEDトラフ形	反 射 率	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		床	10%													0%		
形式: WGP8A1	室指数		固有照明率 S/H=1.0															
<備考> 防湿・防雨形 (オイルミスト対応)	0.6		0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27		
	0.8		0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35		
姿図 	1		0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42		
	1.25		0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48		
	1.5		0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53		
	2		0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60		
	2.5		0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65		
	3		0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69		
光源形式 WGE407NE-N14A1	4		0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74		
	5		0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77		
器具光束 14,000 lm	7		1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82		
	10		1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86		
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 															
上方光束 Fu= 5.2%																		
下方光束 Fd= 94.8%																		
最大取付間隔			<div>配光曲線</div> 															
A-A 1.28 H																		
B-B 1.26 H																		
保守率																		
良	0.88																	
中	0.86																	
否	0.81																	
光度 (cd/1000 lm)																		
A-0	B-B	C-0															A'-0	C'-0
0	303	303															303	
10	297	300															298	
20	283	282	282															
30	260	257	257															
40	230	221	225															
50	193	176	185															
60	160	130	142															
70	119	81	102															
80	83	30	62															
90	54	1	33															
100	33		17															
110	18		7															
120	11		5															
130	6		4															
140	4		3															
150	4		2															
160																		
170																		
180																		