
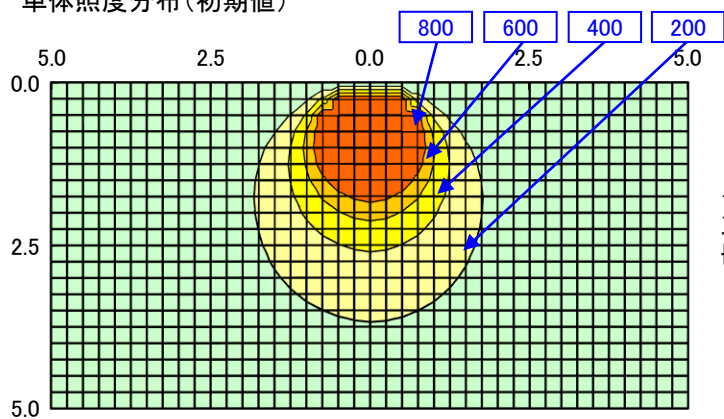
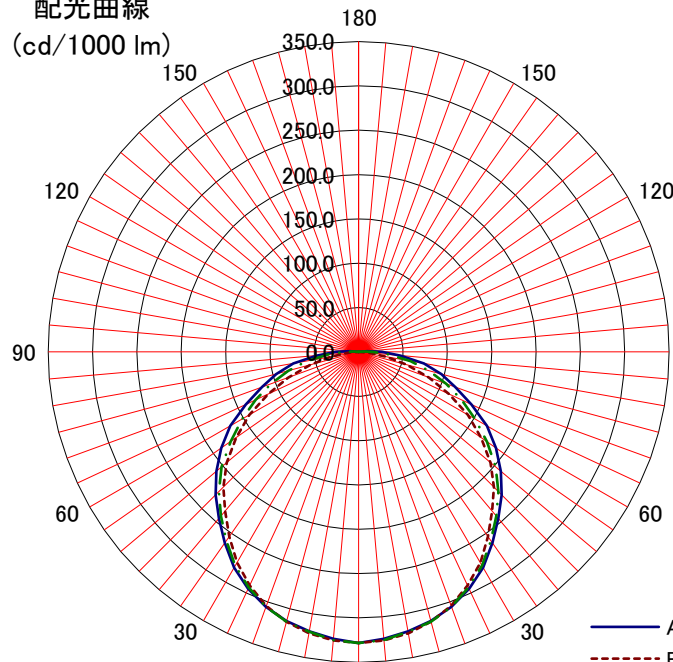


日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%														0%																																																																																																																						
形式: WGP8B1	室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考> 防湿・防雨形 (オイルミスト対応)	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29																																																																																																																								
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38																																																																																																																								
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45																																																																																																																								
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.55	0.64	0.59	0.54	0.52																																																																																																																								
	1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57																																																																																																																								
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65																																																																																																																								
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70																																																																																																																								
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.74																																																																																																																								
光源形式	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79																																																																																																																								
WGE404DE-N14A1	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.82																																																																																																																								
器具光束	7	1.02	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87																																																																																																																								
8,220 lm	10	1.04	1.02	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91																																																																																																																								
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																																																																																																																																					
上方光束 Fu= 0.6%																																																																																																																																							
下方光束 Fd= 99.4%																																																																																																																																							
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div> 																																																																																																																																					
A-A 1.28 H																																																																																																																																							
B-B 1.24 H																																																																																																																																							
保守率	良	0.86																																																																																																																																					
	中	0.81																																																																																																																																					
	否	0.72																																																																																																																																					
光度 (cd/1000 lm)		<table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>328</td><td>328</td><td>328</td><td></td><td></td></tr><tr><td>10</td><td>320</td><td>322</td><td>320</td><td></td><td></td></tr><tr><td>20</td><td>306</td><td>305</td><td>306</td><td></td><td></td></tr><tr><td>30</td><td>281</td><td>274</td><td>278</td><td></td><td></td></tr><tr><td>40</td><td>245</td><td>234</td><td>241</td><td></td><td></td></tr><tr><td>50</td><td>209</td><td>194</td><td>202</td><td></td><td></td></tr><tr><td>60</td><td>167</td><td>142</td><td>152</td><td></td><td></td></tr><tr><td>70</td><td>116</td><td>85</td><td>105</td><td></td><td></td></tr><tr><td>80</td><td>75</td><td>33</td><td>60</td><td></td><td></td></tr><tr><td>90</td><td>26</td><td></td><td>16</td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>															A-0	B-B	C-0	A'-0	C'-0	0	328	328	328			10	320	322	320			20	306	305	306			30	281	274	278			40	245	234	241			50	209	194	202			60	167	142	152			70	116	85	105			80	75	33	60			90	26		16			100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	328															328	328																																																																																																																						
10	320															322	320																																																																																																																						
20	306															305	306																																																																																																																						
30	281															274	278																																																																																																																						
40	245															234	241																																																																																																																						
50	209															194	202																																																																																																																						
60	167															142	152																																																																																																																						
70	116															85	105																																																																																																																						
80	75															33	60																																																																																																																						
90	26																16																																																																																																																						
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							