
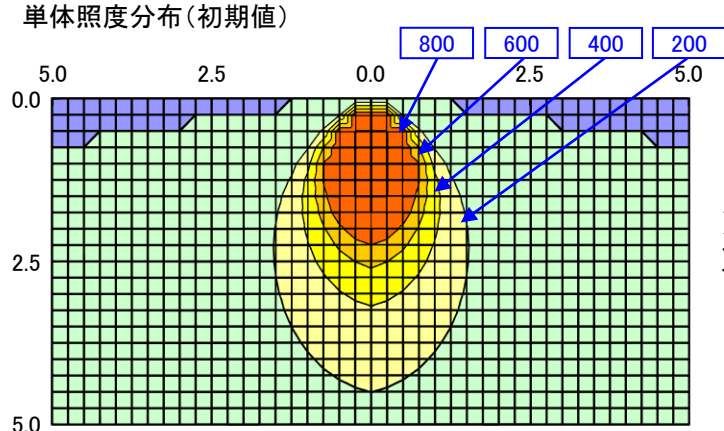
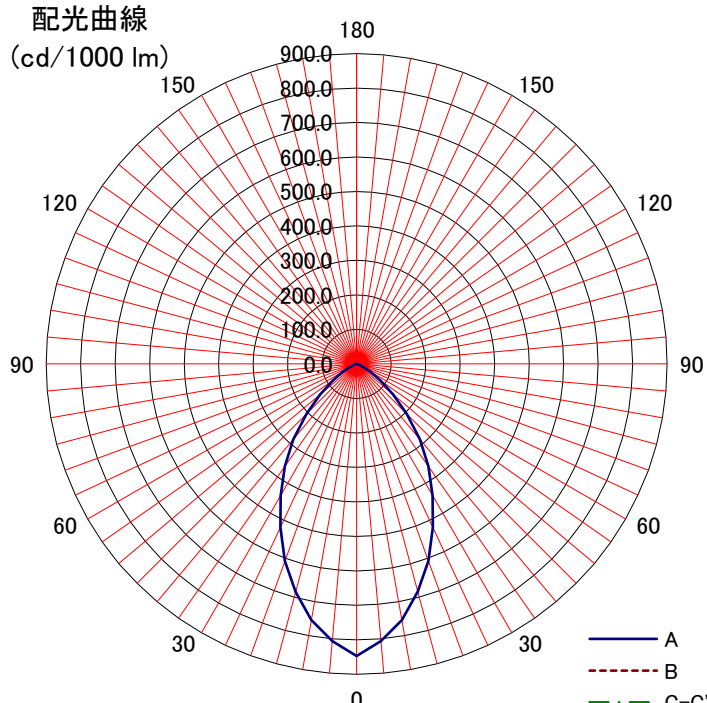


日立照明器具 照明特性

名称: LEDダウンライト	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: LDE54ANW-JX14A	室指数	固有照明率 S/H=1.0																	
＜備考＞	0.6	0.73	0.65	0.60	0.73	0.65	0.59	0.56	0.64	0.59	0.56	0.63	0.59	0.56	0.54				
	0.8	0.82	0.75	0.69	0.81	0.74	0.69	0.66	0.73	0.69	0.65	0.72	0.68	0.65	0.64				
姿図 	1	0.87	0.81	0.76	0.86	0.80	0.75	0.72	0.79	0.75	0.72	0.78	0.74	0.71	0.70				
	1.25	0.92	0.86	0.81	0.90	0.85	0.81	0.78	0.84	0.80	0.77	0.82	0.79	0.77	0.75				
	1.5	0.95	0.89	0.85	0.93	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.81	0.79				
	2	0.98	0.94	0.91	0.97	0.93	0.90	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.84				
	2.5	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.92	0.91	0.89	0.87				
	3	1.01	0.98	0.96	1.00	0.97	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.88				
光源形式	4	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91				
	5	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.93				
器具光束 4,800 lm	7	1.06	1.05	1.03	1.05	1.04	1.02	1.01	1.01	1.01	1.00	1.00	0.99	0.98	0.95				
	10	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.98				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔		(E)lx 0-200 200-400 400-600 600-800 800-1000																	
A-A 0.88 H																			
B-B H																			
保守率	良	0.79																	
	中	0.75																	
	否	0.67																	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																	
	A-0															B-B	C-0	A'-0	C'-0
0	847																		
10	754																		
20	608																		
30	441																		
40	286																		
50	138																		
60	45																		
70	8																		
80																			
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			