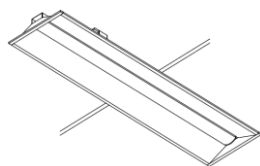
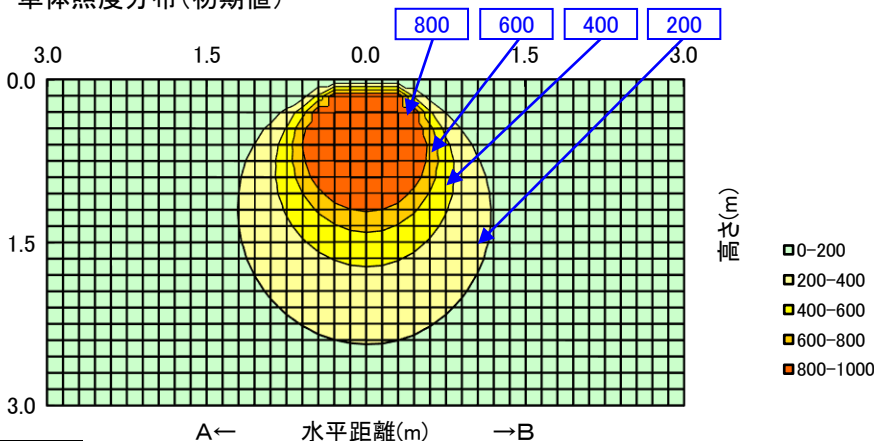
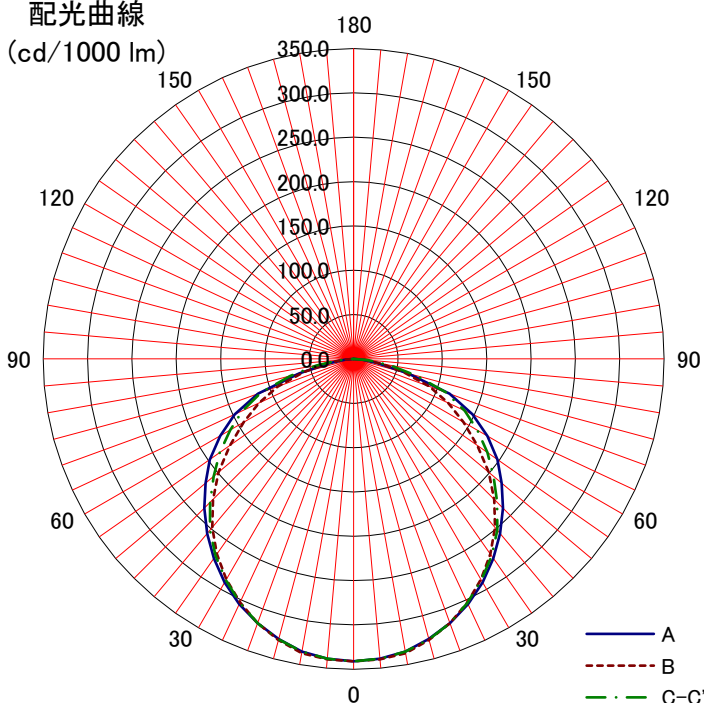


日立照明器具 照明特性

名称: 交換形LED埋込形		天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: TC4C		床	10%															0%
			固有照明率 S/H=1.0															
<備考>		室指数	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.32	0.43	0.37	0.32	0.30	
			0.8	0.67	0.56	0.48	0.66	0.55	0.48	0.42	0.54	0.47	0.42	0.53	0.47	0.42	0.40	
姿図 		1	0.74	0.63	0.55	0.72	0.62	0.55	0.49	0.61	0.54	0.49	0.59	0.53	0.49	0.47		
		1.25	0.80	0.70	0.63	0.78	0.69	0.62	0.57	0.67	0.61	0.56	0.66	0.60	0.56	0.54		
		1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.62	0.71	0.66	0.62	0.59		
		2	0.90	0.83	0.77	0.88	0.82	0.76	0.71	0.80	0.75	0.71	0.78	0.74	0.70	0.67		
		2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73		
		3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76		
光源形式 CET403WWE-X14A		4	0.99	0.94	0.91	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81		
		5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85		
器具光束 3,480 lm		7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.93	0.92	0.89		
		10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93		
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 															
上方光束 Fu= 0.0%																		
下方光束 Fd= 100.0%																		
最大取付間隔			<div>配光曲線 (cd/1000 lm)</div> 															
A-A 1.28 H																		
B-B 1.26 H																		
保守率	良	0.86																
	中	0.81																
	否	0.72																
光度 (cd/1000 lm)																		
	A-0	B-B	C-0	A'-0	C'-0													
0	341	341	341															
10	335	337	335															
20	317	317	317															
30	291	287	288															
40	257	248	252															
50	218	199	206															
60	174	143	161															
70	115	91	111															
80	27	33	43															
90																		
100																		
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		