
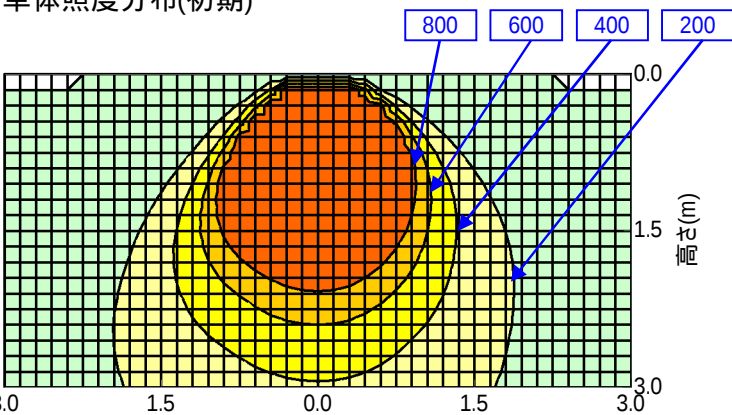
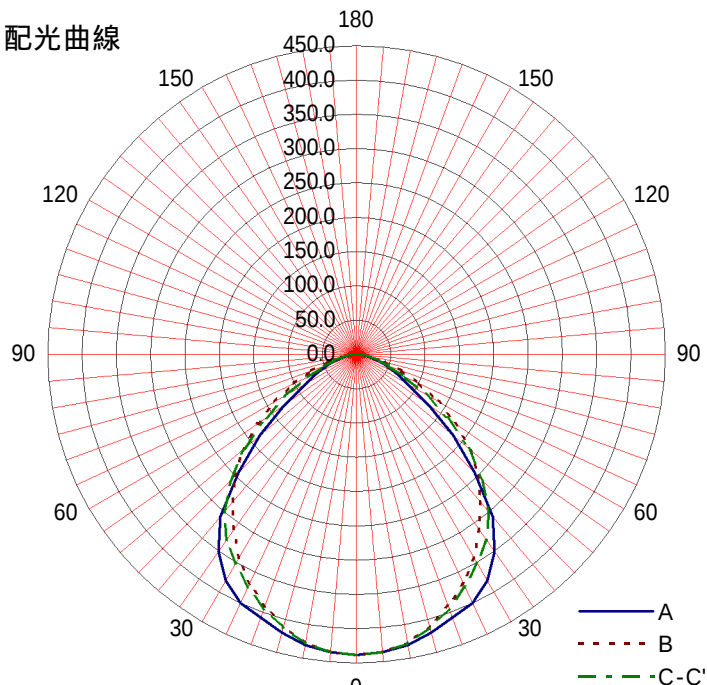
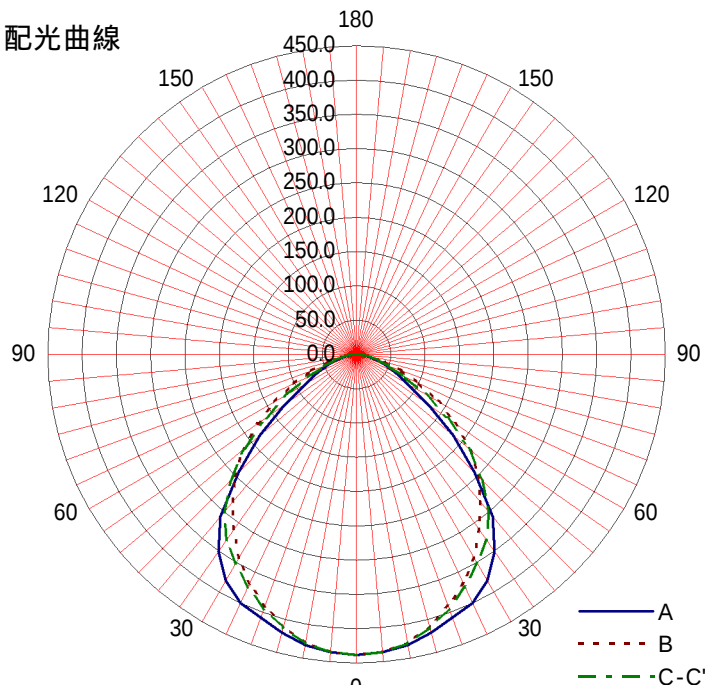


日立照明器具 照明特性

形式：TLE45401L-JZ14 <定格出力タイプ> <電球色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
	姿図		0.6	0.63	0.52	0.45	0.62	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38
			0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48
			1	0.79	0.70	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55
			1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.74	0.68	0.64	0.72	0.67	0.64	0.62
			1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67
			2	0.93	0.87	0.83	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74
			2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78
			3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81
	光源		4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85
品名	LED	5	1.02	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
形式		7	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
光束	7,880 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95	
器具効率 Ft= 100.0%			単体照度分布(初期) 														
上方光束 Fu= 0.0%																	
下方光束 Fd= 100.0%																	
配光分類																	
BZ-			最大取付間隔 A-A 1.30 H B-B 1.18 H														
最大取付間隔																	
保守率																	
良 0.81			配光曲線 														
中 0.77																	
否 0.68																	
光度 (cd/1000 lm)			配光曲線 														
A-0 B-B C-0 A'-0 C'-0																	
0 438 438 438																	
10 430 427 428																	
20 408 390 394																	
30 381 342 351																	
40 308 280 300																	
50 184 217 214																	
60 85 137 116																	
70 44 70 50																	
80 18 22 20																	
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	