
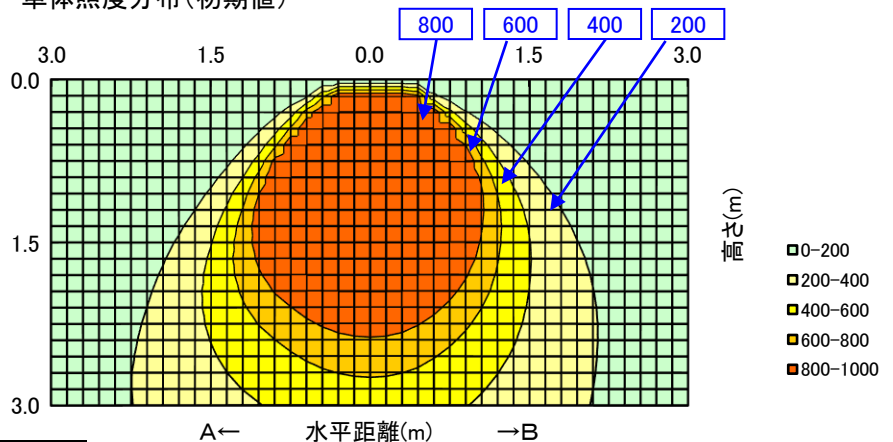
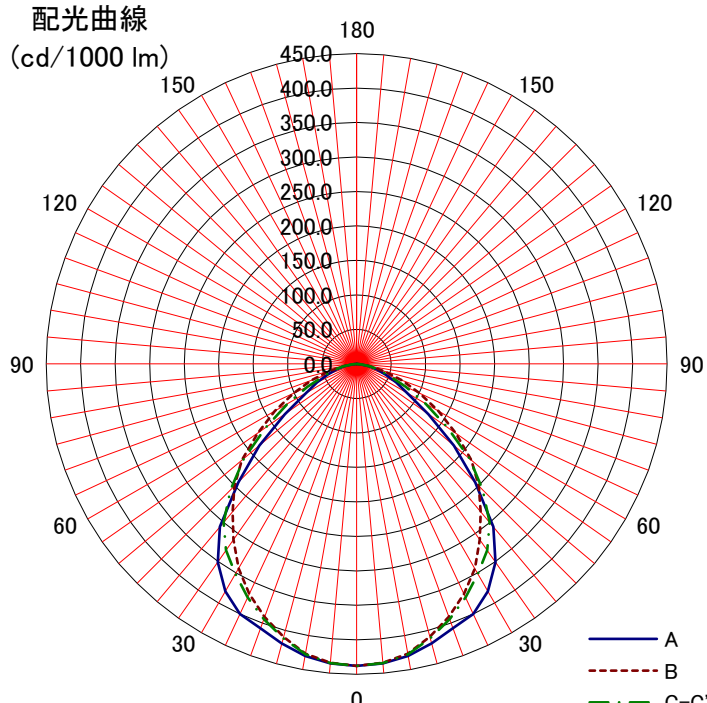


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: TLE454AL-JZU14A	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.63	0.52	0.45	0.61	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38				
	0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48				
姿図 	1	0.79	0.69	0.63	0.77	0.69	0.62	0.58	0.67	0.62	0.57	0.66	0.61	0.57	0.55				
	1.25	0.84	0.76	0.70	0.83	0.75	0.69	0.65	0.74	0.68	0.64	0.72	0.67	0.64	0.62				
	1.5	0.88	0.81	0.75	0.87	0.80	0.75	0.70	0.78	0.74	0.70	0.77	0.73	0.69	0.67				
	2	0.93	0.87	0.83	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74				
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78				
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.87	0.85	0.89	0.86	0.84	0.81				
光源形式 -	4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85				
	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88				
器具光束 10,310 lm	7	1.05	1.03	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92				
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.30 H																			
B-B 1.18 H																			
保守率	良															0.86			
	中															0.81			
	否															0.72			
光度 (cd/1000 lm)																配光曲線 (cd/1000 lm) 			
	A-0	B-B	C-0	A'-0	C'-0														
0	438	438	438																
10	430	427	428																
20	408	390	394																
30	381	342	351																
40	308	280	300																
50	184	217	214																
60	85	137	116																
70	44	70	50																
80	18	22	20																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			