
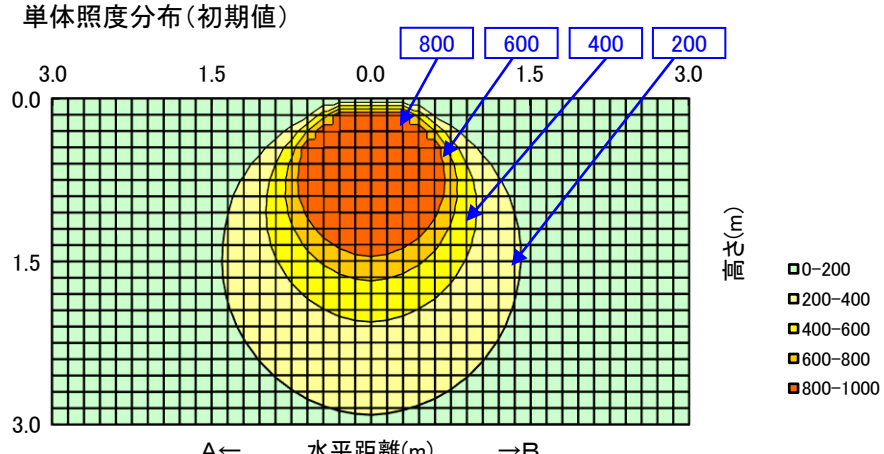
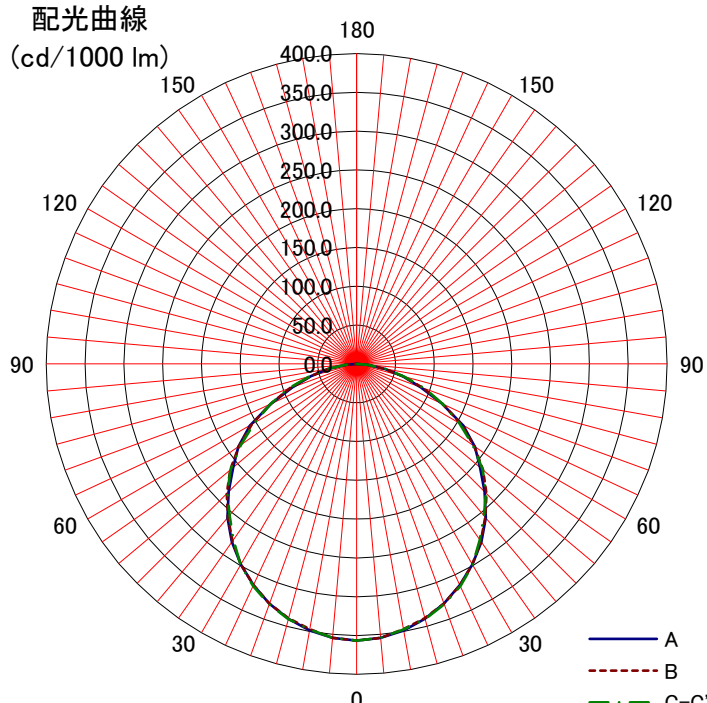


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		床	10%														0%	
形式: TPE454AD-JZL14A	室指数	固有照明率 S/H=1.0																
<備考>	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.34	0.44	0.38	0.33	0.32			
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41			
姿図 	1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48			
	1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.61	0.57	0.55			
	1.5	0.85	0.76	0.70	0.83	0.75	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61			
	2	0.91	0.83	0.78	0.89	0.82	0.77	0.72	0.80	0.76	0.72	0.78	0.74	0.71	0.68			
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.80	0.77	0.83	0.79	0.76	0.73			
	3	0.96	0.91	0.86	0.95	0.90	0.85	0.82	0.87	0.84	0.80	0.85	0.82	0.79	0.77			
	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.84	0.82			
光源形式	5	1.01	0.98	0.94	1.00	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85			
器具光束 4,750 lm	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.92	0.90			
	10	1.05	1.04	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93			
器具効率 Ft= 100%		単体照度分布(初期値) 																
上方光束 Fu= 0%																		
下方光束 Fd= 100%																		
最大取付間隔																		
A-A 1.26 H																		
B-B 1.26 H																		
保守率	良	0.81	配光曲線 (cd/1000 lm) 															
	中	0.77																
	否	0.72																
光度 (cd/1000 lm)																		
	A-0	B-B														C-0	A'-0	C'-0
0	357	357														357		
10	349	347	348															
20	329	329	330															
30	298	298	299															
40	259	258	255															
50	208	212	212															
60	159	156	153															
70	88	91	94															
80	37	37	38															
90																		
100																		
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		