

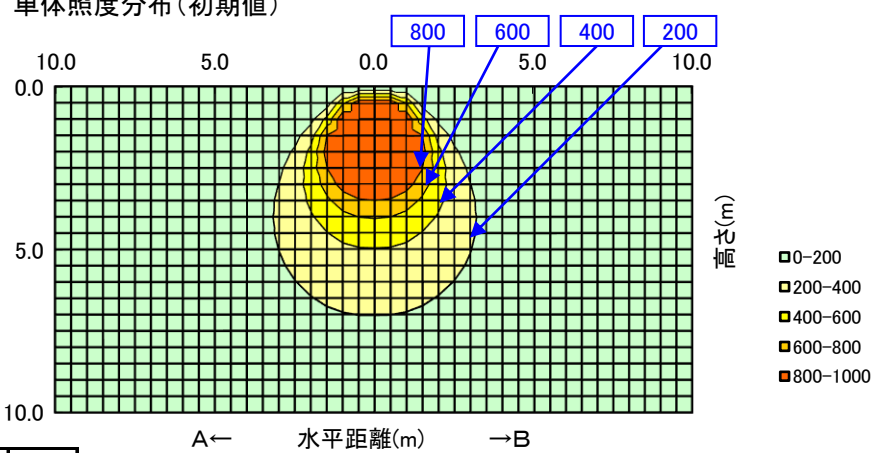


日立照明器具 照明特性

名称: 高天井用LED器具		天井 反射率	80%			70%				50%			30%			0%				
			壁 70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
形式: WFMTE22AMN-J14B		床 10%	固有照明率 S/H=1.0																	
			室指数																	
<備考>		0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41				
		0.8	0.75	0.65	0.59	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51				
姿図 		1	0.81	0.72	0.66	0.80	0.71	0.65	0.61	0.70	0.65	0.61	0.69	0.64	0.60	0.58				
		1.25	0.86	0.78	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.67	0.75	0.70	0.67	0.65				
		1.5	0.90	0.83	0.78	0.89	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.70				
		2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77				
		2.5	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81				
		3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83				
光源形式 -		4	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87				
		5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90				
器具光束 21,000 lm		7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93				
		10	1.07	1.06	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.99	0.96				
器具効率 Ft= 100%			単体照度分布(初期値) 																	
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔																				
A-A		1.24																H		
B-B		1.24																H		
保守率	良	0.83																		
	中	0.81																		
	否	0.76																		
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm) 																	
	A-0	B-B																C-0	A'-0	C'-0
0	470	470																470		
10	470	468																469		
20	443	440																445		
30	388	392																391		
40	304	305																301		
50	195	194																190		
60	102	108																93		
70	43	43																38		
80	11	11																11		
90	1	1																1		
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				

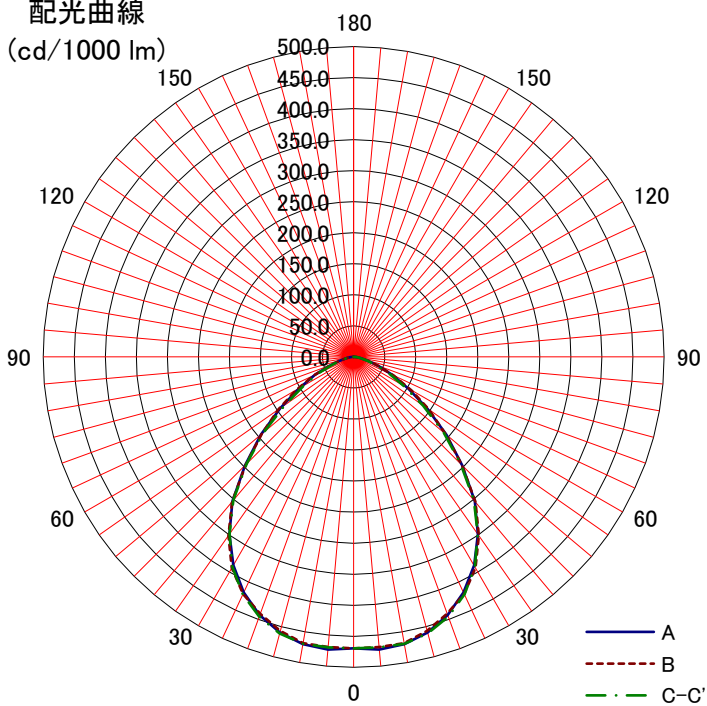