
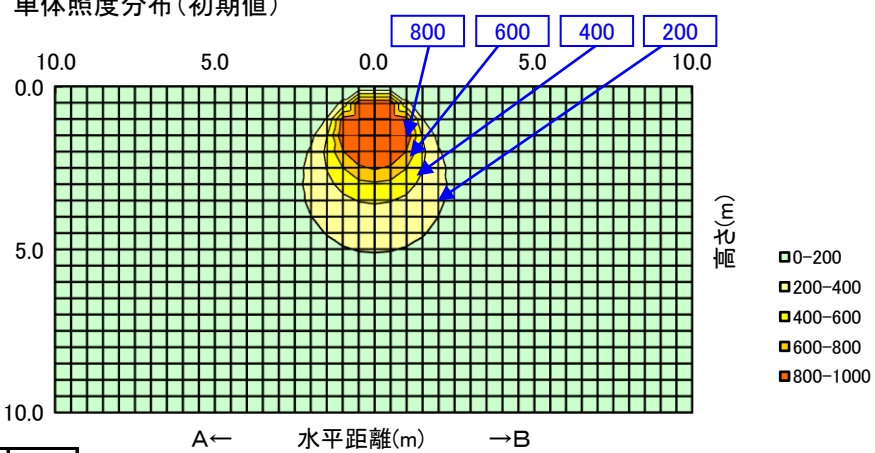
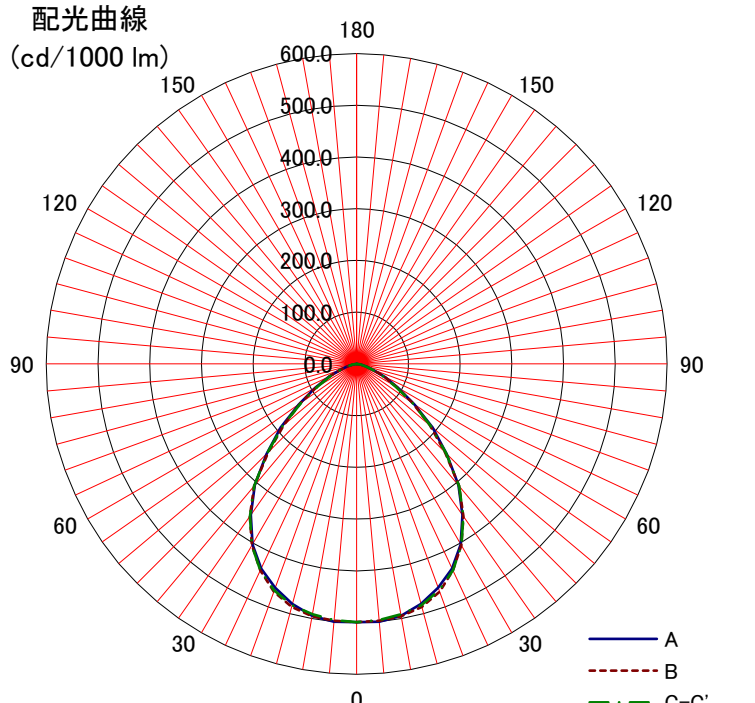


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%														0%			
形式: WGMTE11AMN-J14B	室指数	固有照明率 S/H=1.0																		
<備考>	0.6	0.66	0.56	0.49	0.65	0.55	0.49	0.45	0.54	0.49	0.45	0.54	0.48	0.45	0.43					
	0.8	0.76	0.66	0.60	0.74	0.66	0.60	0.55	0.65	0.59	0.55	0.64	0.59	0.55	0.53					
姿図 	1	0.82	0.73	0.67	0.80	0.73	0.67	0.63	0.71	0.66	0.62	0.70	0.66	0.62	0.60					
	1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.69	0.77	0.73	0.69	0.76	0.72	0.68	0.66					
	1.5	0.91	0.84	0.79	0.89	0.83	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74	0.72					
	2	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80	0.78					
	2.5	0.98	0.93	0.90	0.97	0.92	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82					
	3	1.00	0.96	0.92	0.98	0.95	0.91	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.84					
	4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88					
光源形式	5	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90					
器具光束	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.94					
	10,400 lm	10	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96				
器具効率 Ft= 100%		単体照度分布(初期値) 																		
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔																				
A-A 1.20 H																				
B-B 1.22 H																				
保守率	良																0.83			
	中																0.81			
	否																0.76			
光度 (cd/1000 lm)																	配光曲線 (cd/1000 lm) 			
A-0 B-B C-0 A'-0 C'-0																				
0	499	499	499																	
10	494	495	491																	
20	461	468	466																	
30	403	404	405																	
40	306	308	308																	
50	191	184	187																	
60	92	90	87																	
70	35	35	33																	
80	7	7	8																	
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				