
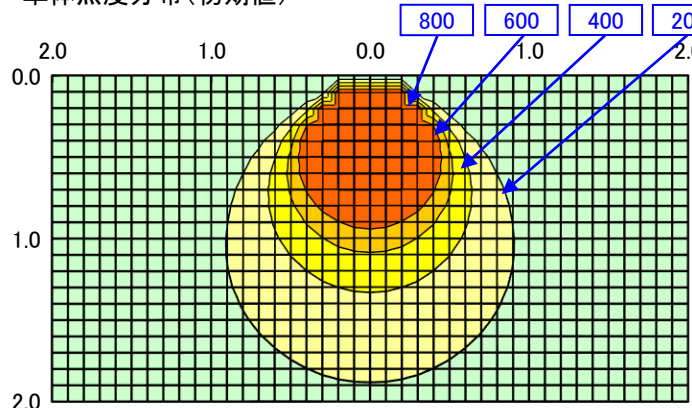
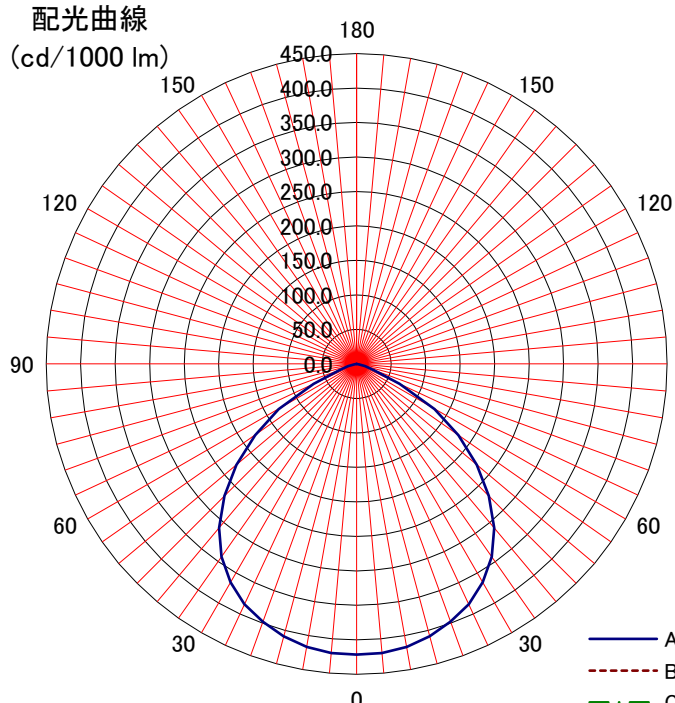


日立照明器具 照明特性

名称: LEDダウンライト	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: WLDE3307WN	室指数	固有照明率 S/H=1.0														
＜備考＞	0.6	0.63	0.52	0.45	0.62	0.51	0.45	0.40	0.50	0.44	0.40	0.49	0.44	0.40	0.38	
	0.8	0.73	0.63	0.56	0.72	0.62	0.56	0.51	0.61	0.55	0.51	0.60	0.55	0.51	0.49	
姿図 	1	0.80	0.71	0.64	0.78	0.70	0.64	0.59	0.68	0.63	0.59	0.67	0.62	0.58	0.56	
	1.25	0.85	0.77	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.66	0.64	
	1.5	0.90	0.82	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.72	0.78	0.74	0.71	0.69	
	2	0.95	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76	
	2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.86	0.84	0.88	0.85	0.83	0.80	
	3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.83	
	4	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87	
光源形式 -	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90	
器具光束 1,680 lm	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93	
	10	1.07	1.06	1.05	1.06	1.04	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.96	
器具効率 Ft= 100%		単体照度分布(初期値)  2.0 1.0 0.0 1.0 2.0 0.0 1.0 2.0 水平距離(m) 0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.30 H																
B-B H																
保守率	良	0.79														
	中	0.75														
	否	0.67														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)  180 150 150 120 120 90 90 60 60 30 30 0 450.0 400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0 A B C-C'														
A-0 B-B C-0 A'-0 C'-0																
0	421															
10	417															
20	398															
30	366															
40	310															
50	228															
60	130															
70	27															
80	4															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																