
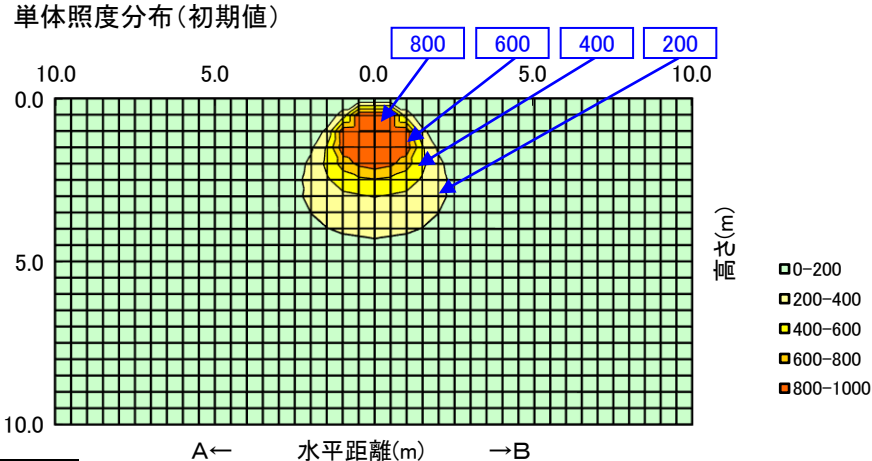
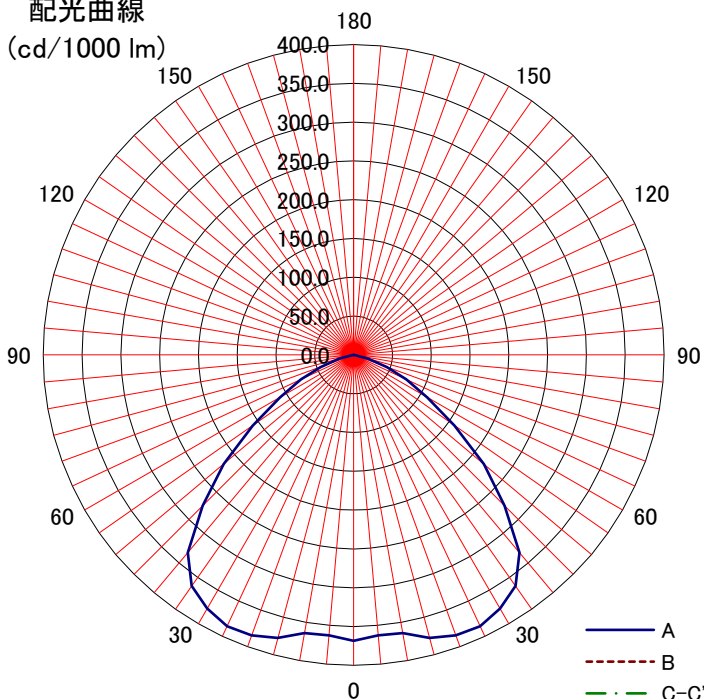


日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反 射 率	天井	80%				70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: WSBME11BMNC1	室指数	固有照明率 S/H=1.0																	
＜備考＞	0.6	0.62	0.51	0.44	0.61	0.51	0.44	0.39	0.50	0.43	0.39	0.49	0.43	0.39	0.37				
	0.8	0.72	0.62	0.55	0.71	0.62	0.55	0.50	0.60	0.54	0.50	0.59	0.54	0.50	0.48				
姿図 	1	0.79	0.70	0.63	0.78	0.69	0.63	0.58	0.68	0.62	0.58	0.66	0.61	0.57	0.55				
	1.25	0.85	0.77	0.70	0.83	0.76	0.70	0.65	0.74	0.69	0.65	0.73	0.68	0.65	0.63				
	1.5	0.89	0.82	0.76	0.87	0.81	0.76	0.71	0.79	0.75	0.71	0.77	0.74	0.70	0.68				
	2	0.94	0.88	0.84	0.93	0.87	0.83	0.79	0.85	0.82	0.78	0.84	0.80	0.78	0.75				
	2.5	0.97	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.80				
	3	0.99	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82				
	4	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.86				
光源形式	5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89				
器具光束 10,000 lm	7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.95	0.93				
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96				
器具効率 Ft= 100%		単体照度分布(初期値)  800 600 400 200 10.0 5.0 0.0 5.0 10.0 0.0 5.0 10.0 水平距離(m) 0-200 200-400 400-600 600-800 800-1000																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.50 H																			
B-B H																			
保守率	良															0.81			
	中															0.79			
	否															0.75			
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)  180 150 120 90 60 30 0 400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0 A B C-C'																	
	A-0															B-B	C-0	A'-0	C'-0
0	368																		
10	364																		
20	385																		
30	377																		
40	332																		
50	219																		
60	110																		
70	45																		
80	3																		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			