
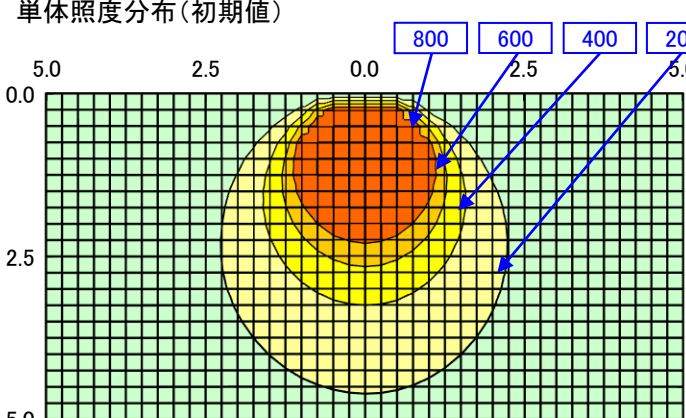
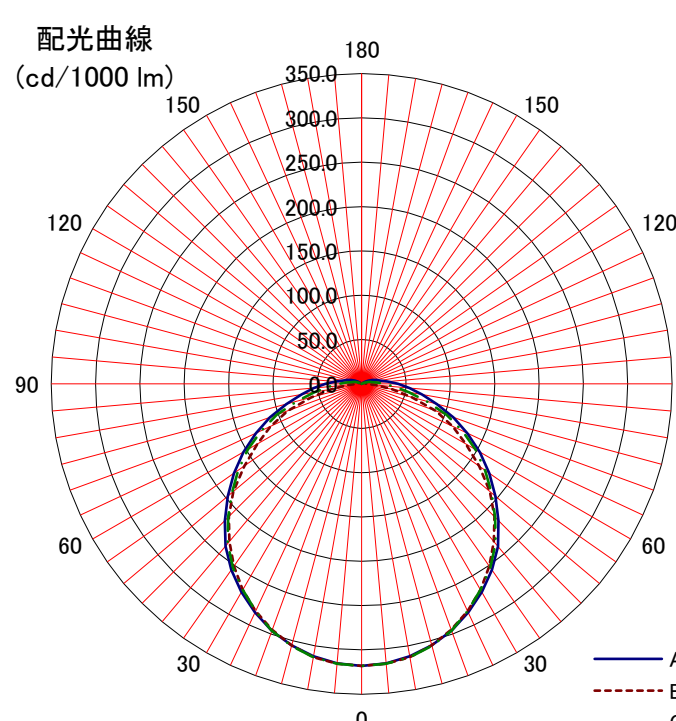
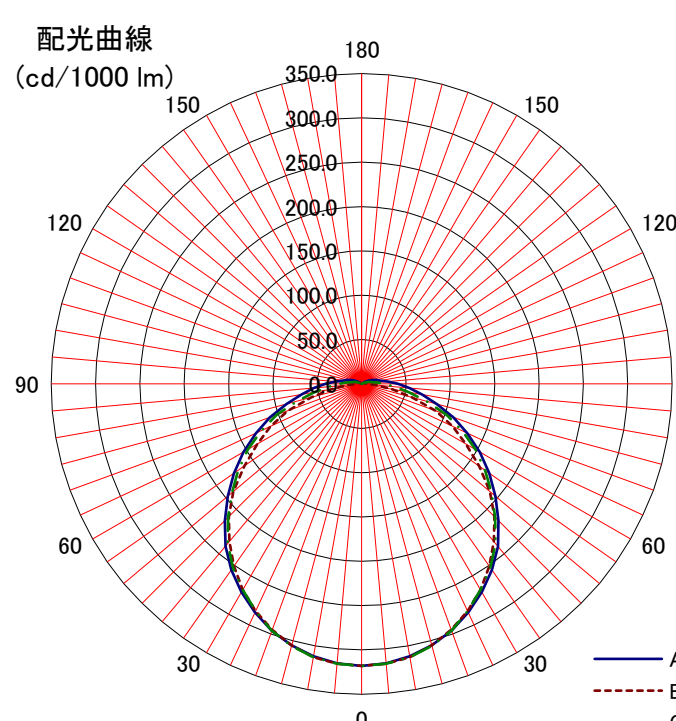
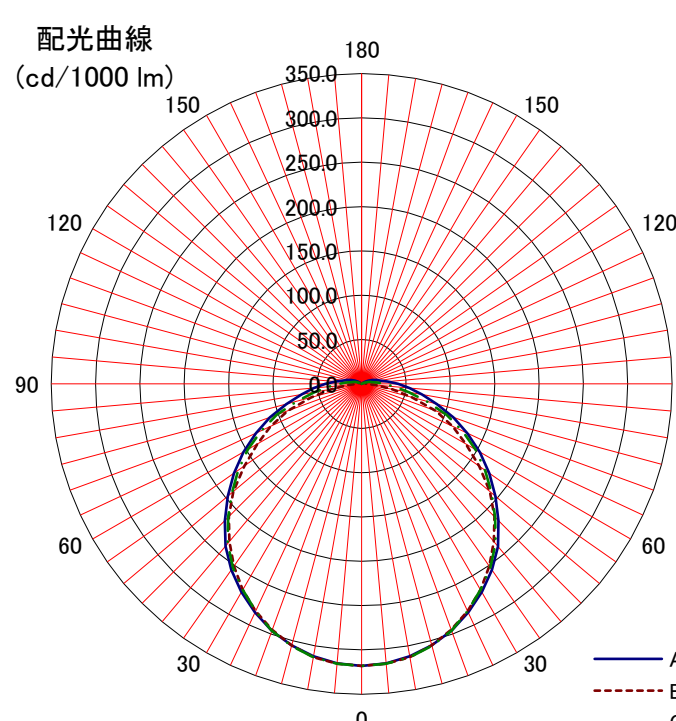


## 日立照明器具 照明特性

名称: 交換形LED逆富士形	反射率	天井	80%			70%				50%			30%			0%										
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%										
		床	10%														0%									
形式: NC8B	室指数	固有照明率 S/H=1.0																								
〈備考〉	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28											
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37											
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43											
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50											
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55											
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63											
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68											
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71											
	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76											
光源形式 CE814DE-X24A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80											
器具光束 13,320 lm	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84											
	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88											
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> 																								
上方光束 Fu= 3.5%																										
下方光束 Fd= 96.5%																										
最大取付間隔		<div>A← 水平距離(m) →B</div> 																								
A-A 1.28 H																										
B-B 1.26 H																										
保守率																										
良 0.88		<div>配光曲線 (cd/1000 lm)</div> 																								
中 0.86																										
否 0.81																										
光度 (cd/1000 lm)		<div>A← 水平距離(m) →B</div> 																								
A-0																	B-B		C-0		A'-0		C'-0			
0																	318		318		318					
10																	312		313		313					
20		296		295		296																				
30		271		268		268																				
40		239		232		235																				
50		197		189		191																				
60		154		136		148																				
70		110		89		102																				
80		69		35		54																				
90		41		5		25																				
100		21		5		12																				
110		13		3		6																				
120		5		2		1																				
130																										
140																										
150																										
160																										
170																										
180																										