
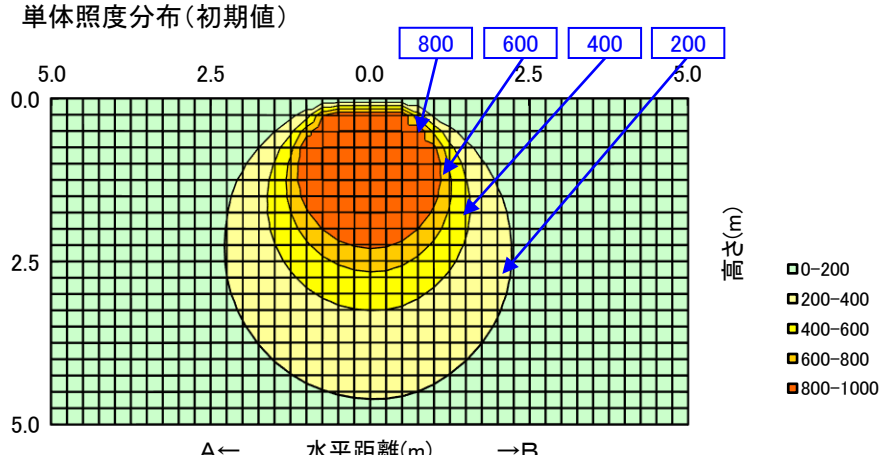
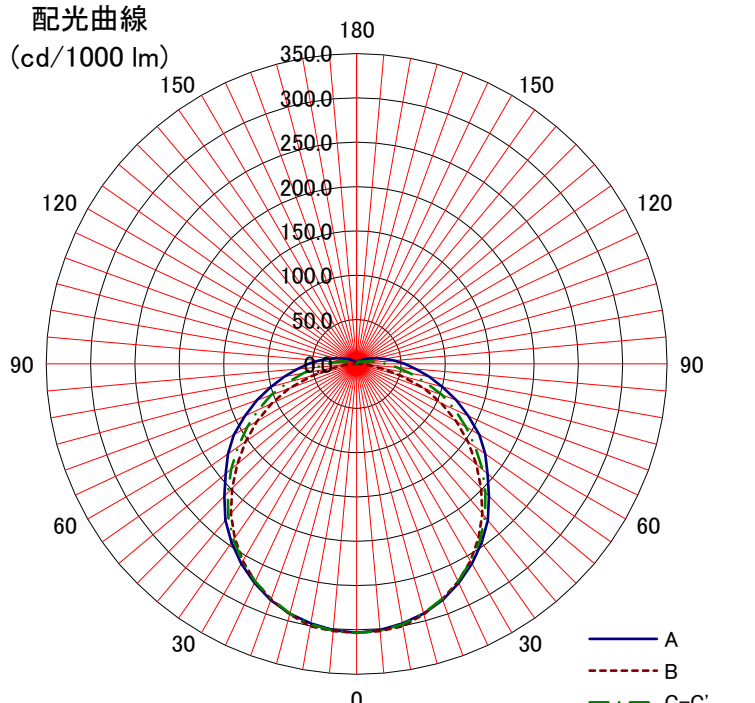


日立照明器具 照明特性

名称: 交換形LED逆富士形		天井 反射率	80%			70%				50%			30%			0%				
			壁 70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
形式: WGN8A1		床 室指数	固有照明率 S/H=1.0														0%			
			10%														0%			
<備考> 防湿・防雨形 (オイルミスト対応)		0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27				
		0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35				
姿図 		1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42				
		1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48				
		1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53				
		2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60				
		2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65				
		3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69				
光源形式 WGE407NE-N14A1		4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74				
		5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77				
器具光束 14,000 lm		7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82				
		10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86				
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 																	
上方光束 Fu= 5.2%																				
下方光束 Fd= 94.8%																				
最大取付間隔																				
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良	0.88																		
	中	0.86																		
	否	0.81																		
光度 (cd/1000 lm)			<div>配光曲線 (cd/1000 lm)</div> 																	
	A-0	B-B															C-0	A'-0	C'-0	
	0	303															303	303		
	10	297															300	298		
	20	283															282	282		
	30	260															257	257		
	40	230															221	225		
	50	193															176	185		
	60	160															130	142		
	70	119															81	102		
	80	83															30	62		
	90	54															1	33		
	100	33																17		
	110	18																7		
	120	11																5		
	130	6																4		
	140	4																3		
	150	4																2		
	160																			
	170																			
	180																			