
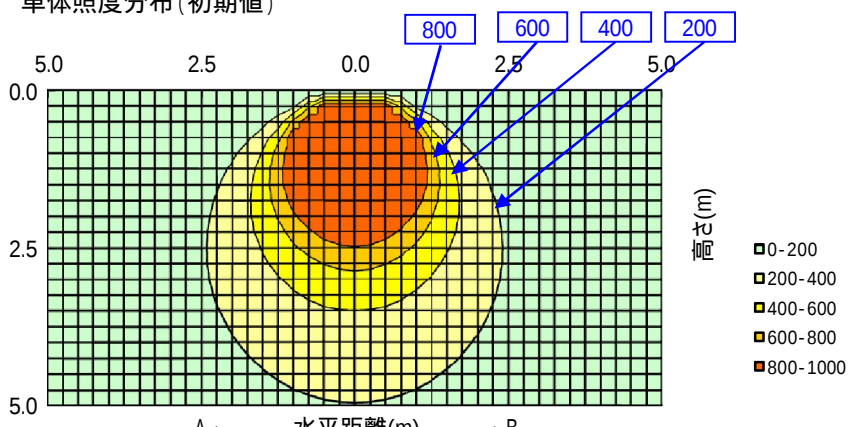
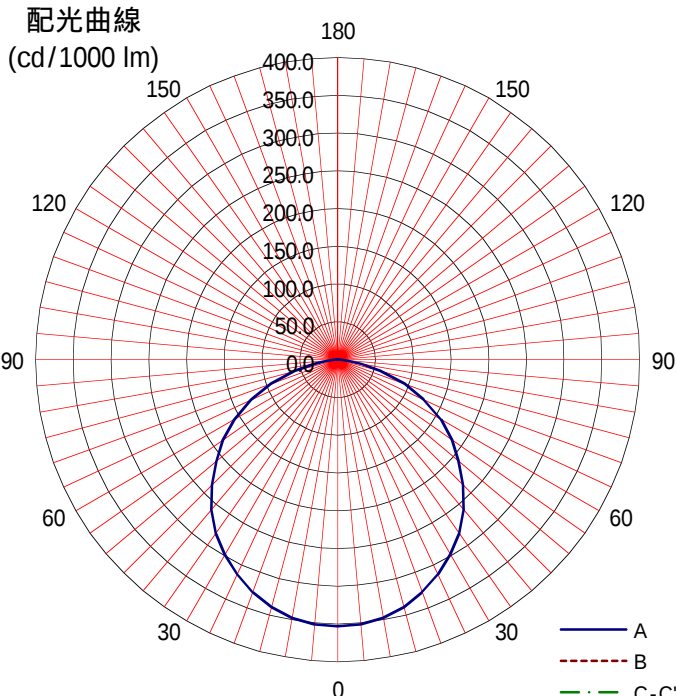


日立照明器具 照明特性

名称: 高天井用LEDラング (アームタイプ)	反 射 率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: BMEP1601MN	室指数	固有照明率 S/H=1.0																	
<備考> 拡散カバー	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.38	0.33	0.44	0.38	0.33	0.31				
	0.8	0.68	0.57	0.49	0.67	0.56	0.49	0.44	0.55	0.48	0.43	0.54	0.48	0.43	0.41				
姿図 	1	0.75	0.64	0.57	0.73	0.63	0.56	0.51	0.62	0.55	0.50	0.60	0.55	0.50	0.48				
	1.25	0.81	0.71	0.64	0.79	0.70	0.63	0.58	0.68	0.62	0.58	0.67	0.62	0.57	0.55				
	1.5	0.85	0.76	0.70	0.83	0.76	0.69	0.64	0.74	0.68	0.64	0.72	0.67	0.63	0.61				
	2	0.91	0.84	0.78	0.89	0.83	0.77	0.73	0.81	0.76	0.72	0.79	0.75	0.71	0.69				
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74				
	3	0.96	0.91	0.86	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.82	0.80	0.77				
	4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82				
光源形式 -	5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85				
器具光束	7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.95	0.94	0.93	0.90				
13,900 lm	10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93				
器具効率 Ft= 100%		単体照度分布 (初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.26 H																			
B-B H																			
保守率	良	0.81																	
	中	0.79																	
	否	0.75																	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																	
	A-0															B-B	C-0	A'-0	C'-0
0	353																		
10	347																		
20	328																		
30	298																		
40	260																		
50	210																		
60	158																		
70	94																		
80	31																		
90	1																		
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			