
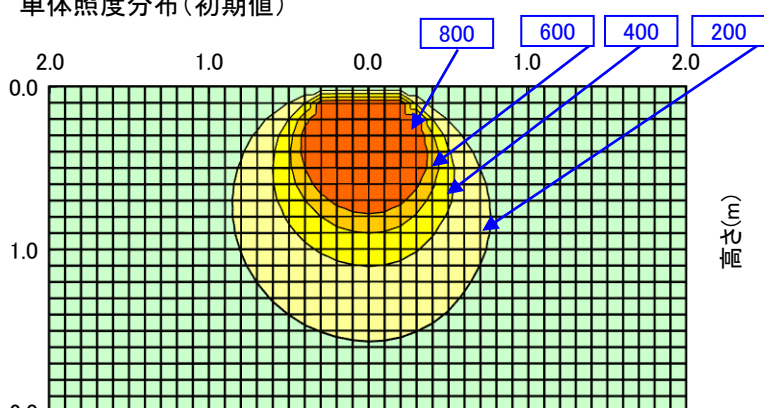
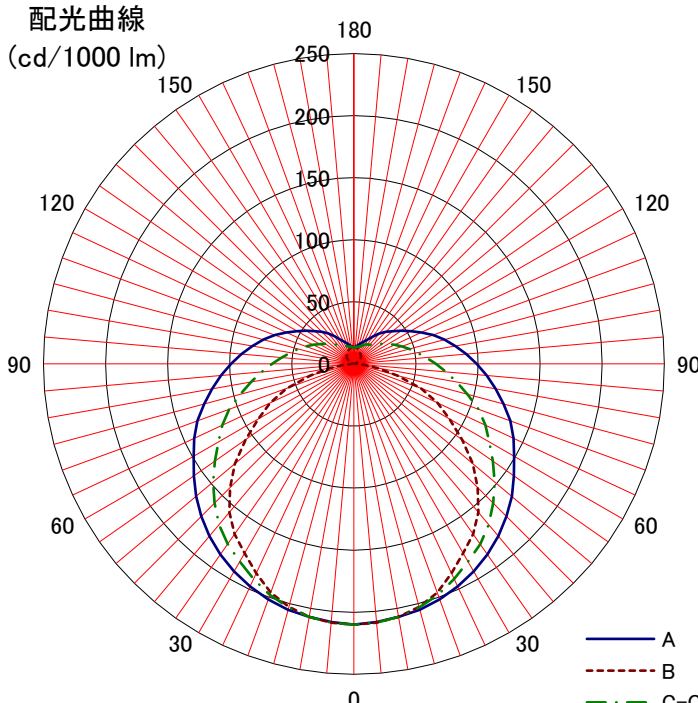


日立照明器具 照明特性

名称: 直管形LEDランプ	天井 反射率 壁 床	80%			70%				50%			30%			0%	
		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		10%													0%	
形式: LDK40SS-D/15/23NE	室指数	照明率 S/H=1.0														
<備考> FLR40形 定格出力タイプ (昼光色)	0.6	0.52	0.39	0.31	0.49	0.38	0.30	0.25	0.35	0.29	0.24	0.33	0.27	0.23	0.19	
	0.8	0.60	0.48	0.40	0.58	0.46	0.39	0.33	0.43	0.36	0.31	0.40	0.34	0.30	0.26	
姿図 	1	0.66	0.55	0.46	0.63	0.53	0.45	0.39	0.49	0.42	0.37	0.45	0.39	0.35	0.30	
	1.25	0.72	0.61	0.53	0.69	0.59	0.51	0.46	0.55	0.48	0.43	0.50	0.45	0.41	0.35	
	1.5	0.76	0.66	0.59	0.73	0.64	0.57	0.51	0.59	0.53	0.48	0.55	0.50	0.45	0.40	
	2	0.82	0.73	0.66	0.78	0.71	0.64	0.59	0.65	0.60	0.55	0.60	0.56	0.52	0.46	
	2.5	0.86	0.78	0.72	0.82	0.75	0.69	0.64	0.70	0.65	0.60	0.64	0.60	0.57	0.50	
	3	0.88	0.81	0.75	0.84	0.78	0.73	0.68	0.73	0.68	0.64	0.67	0.63	0.60	0.53	
	4	0.91	0.86	0.81	0.88	0.83	0.78	0.74	0.77	0.73	0.70	0.71	0.68	0.65	0.58	
光源	5	0.94	0.89	0.85	0.90	0.86	0.82	0.78	0.80	0.76	0.73	0.74	0.71	0.69	0.61	
品名 直管形LEDランプ	形式 LDK40SS-D/15/23NE	7	0.96	0.93	0.89	0.93	0.90	0.87	0.84	0.83	0.81	0.78	0.77	0.75	0.73	0.66
光束 2,330 lm	10	0.99	0.96	0.94	0.95	0.93	0.90	0.88	0.86	0.85	0.83	0.80	0.79	0.78	0.69	
器具効率 Ft=		単体照度分布(初期値)  800 600 400 200 2.0 1.0 0.0 1.0 2.0 0.0 1.0 2.0 水平距離(m) 0-200 200-400 400-600 600-800 800-1000 (E)lx														
上方光束 Fu=																
下方光束 Fd=																
最大取付間隔		A-A 1.38 H B-B 1.26 H														
保守率	良 中 否															
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)  180 250 150 120 90 60 30 0 0 50 100 150 200 250 A B C-C'														
	A-0 B-B C-0 A'-0 C'-0															
0	210 210 210															
10	207 207 207															
20	202 196 198															
30	193 176 184															
40	181 156 169															
50	166 125 148															
60	149 89 126															
70	134 58 107															
80	116 20 84															
90	99 1 66															
100	83 1 52															
110	68 3 41															
120	53 4 32															
130	41 7 25															
140	32 9 20															
150	23 10 18															
160	18 12 15															
170	15 13 14															
180	13 13 13															