
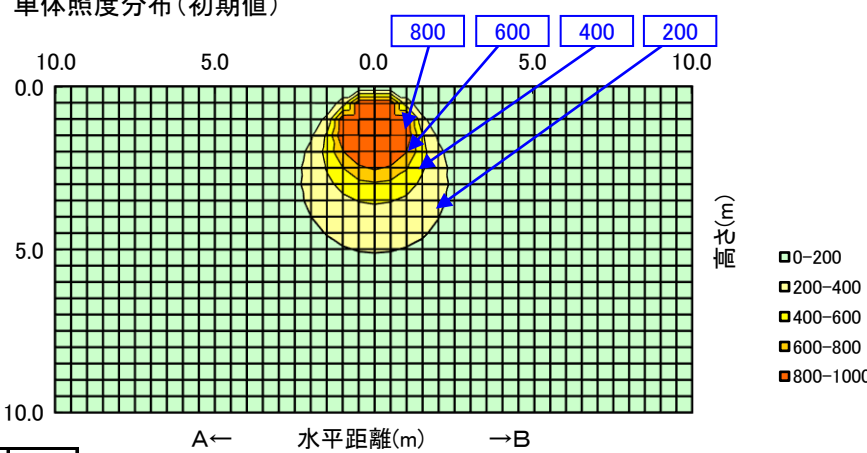
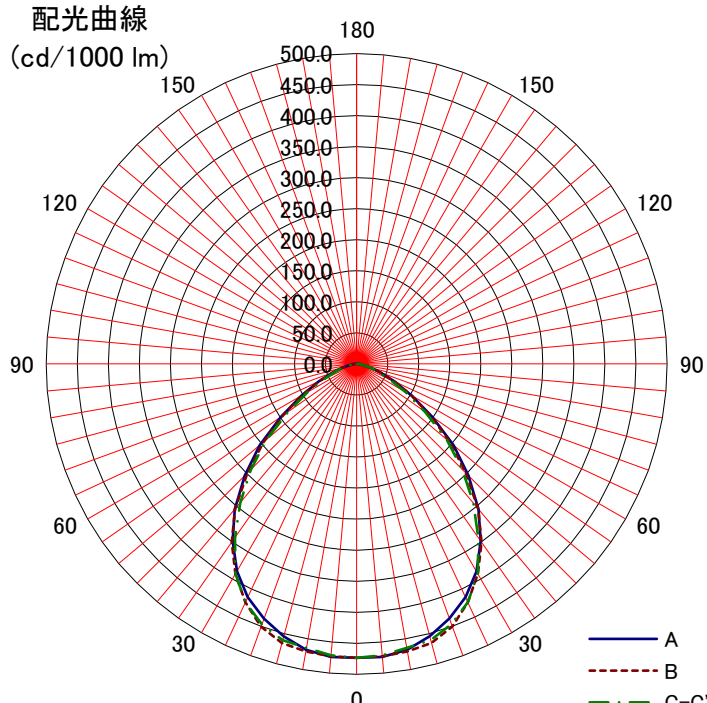


日立照明器具 照明特性

名称: 高天井用LED器具		天井 反射率	80%			70%				50%			30%			0%				
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
形式: MTE11AMN-J14B		床	10%															0%		
			室指数	固有照明率 S/H=1.0																
〈備考〉		0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41				
		0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51				
姿図 		1	0.81	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.65	0.61	0.68	0.64	0.60	0.58				
		1.25	0.86	0.78	0.72	0.85	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65				
		1.5	0.90	0.83	0.78	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.79	0.75	0.72	0.70				
		2	0.94	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.83	0.79	0.84	0.81	0.79	0.77				
		2.5	0.97	0.92	0.88	0.96	0.91	0.88	0.85	0.89	0.86	0.84	0.88	0.85	0.83	0.80				
		3	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83				
光源形式 -		4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.92	0.90	0.93	0.91	0.89	0.86				
		5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89				
器具光束 11,000 lm		7	1.05	1.03	1.01	1.03	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.96	0.95	0.93				
		10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96				
器具効率 Ft= 100%		単体照度分布(初期値) 																		
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔																				
A-A 1.22 H																				
B-B 1.22 H																				
保守率	良																0.83			
	中																0.81			
	否	0.76																		
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																		
	A-0																B-B	C-0	A'-0	C'-0
0	473																473	473		
10	468																470	465		
20	436																451	447		
30	386																391	390		
40	306																305	292		
50	204																196	190		
60	103																102	91		
70	41																41	36		
80	13																13	13		
90	1																1	1		
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				