
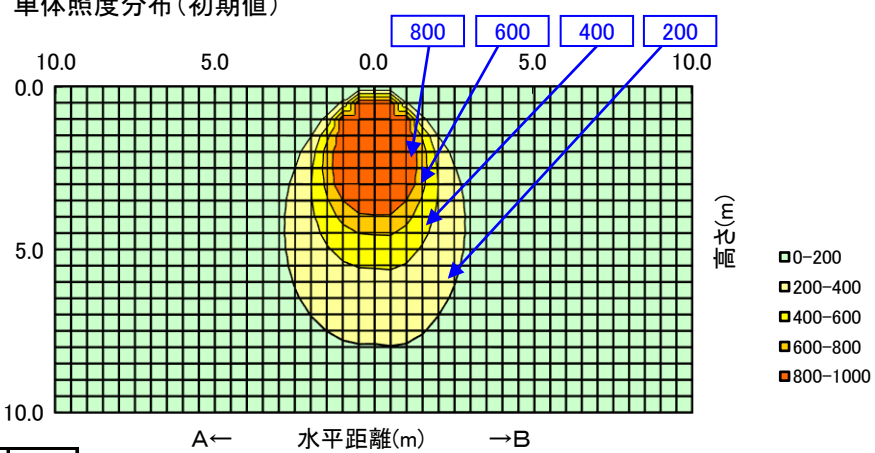
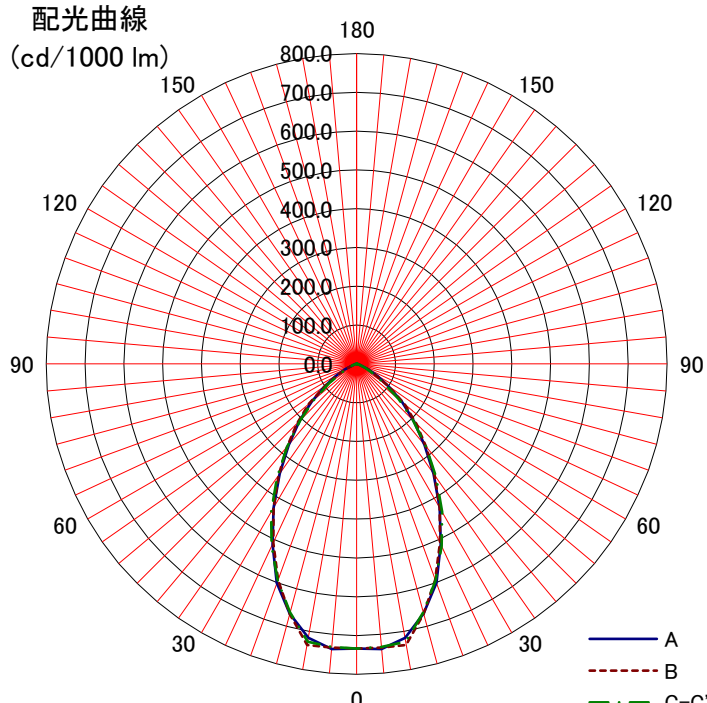
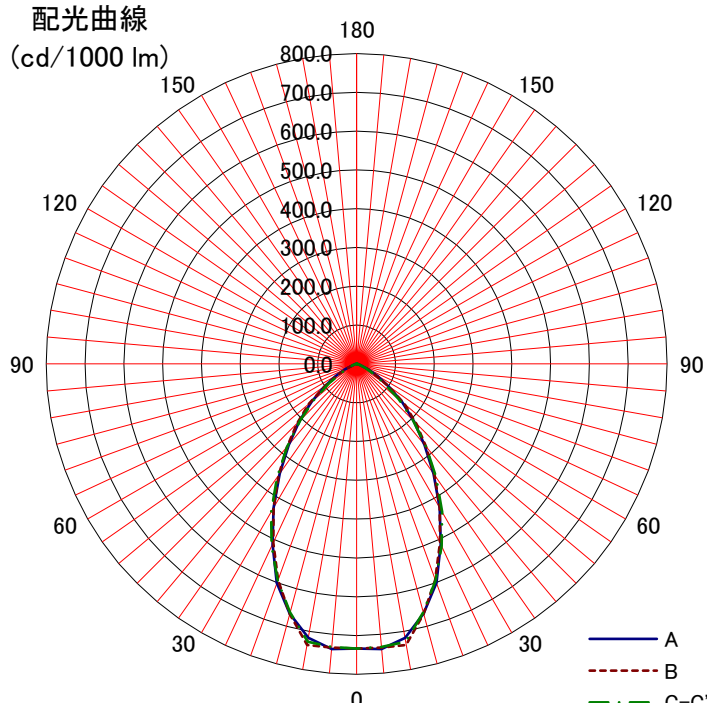
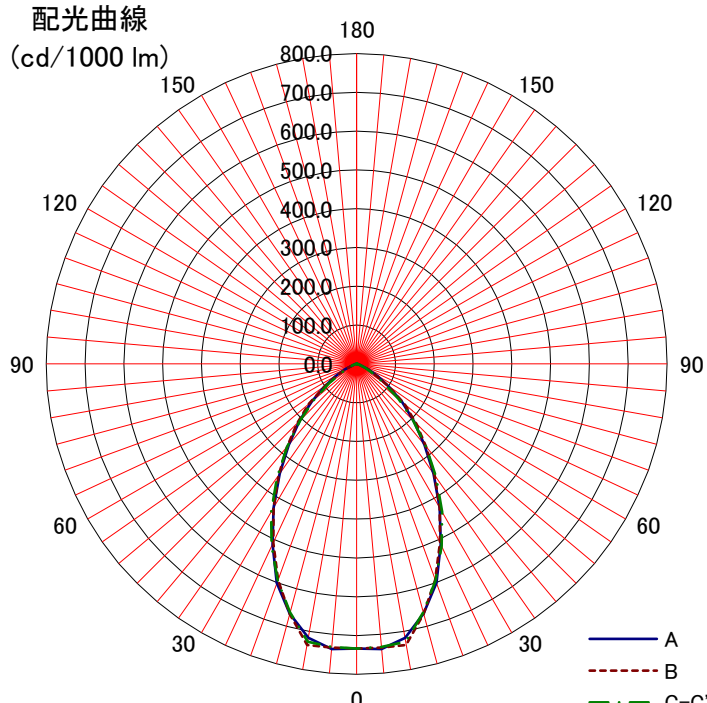
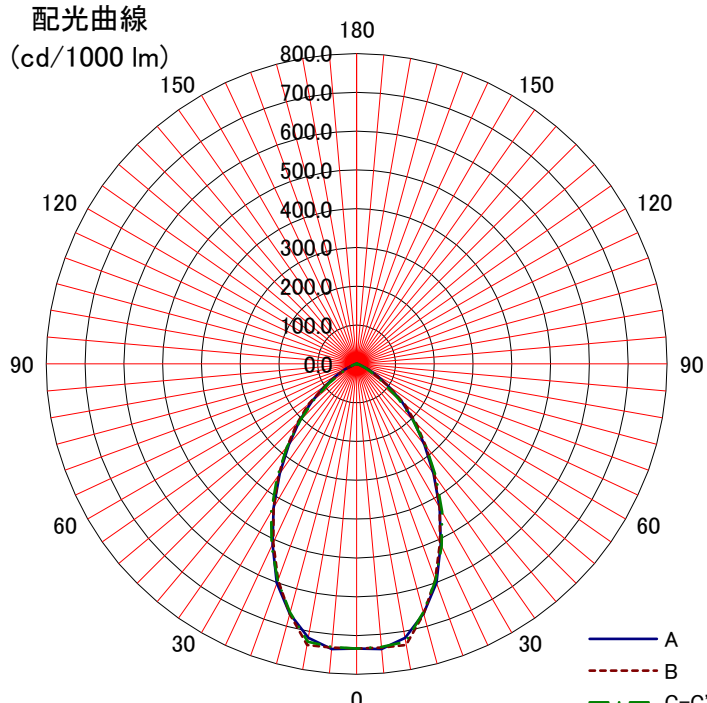
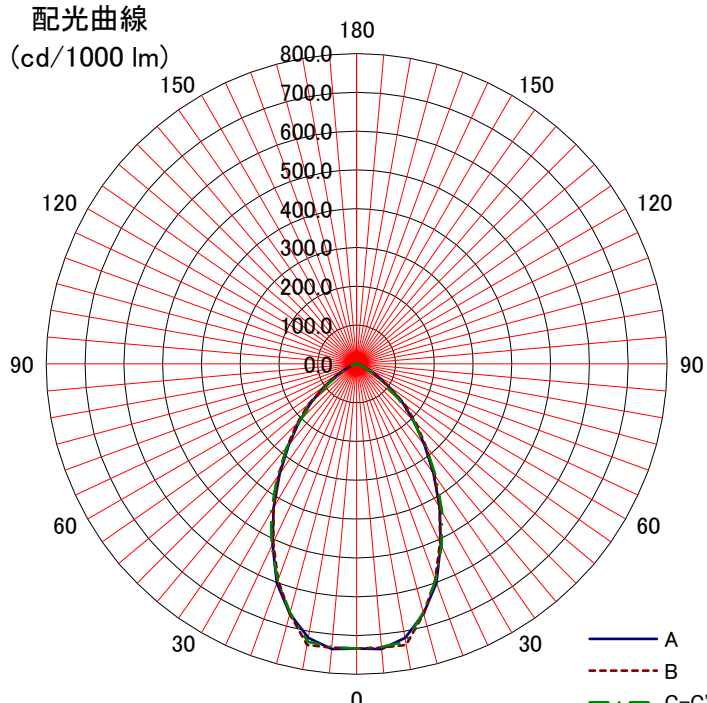
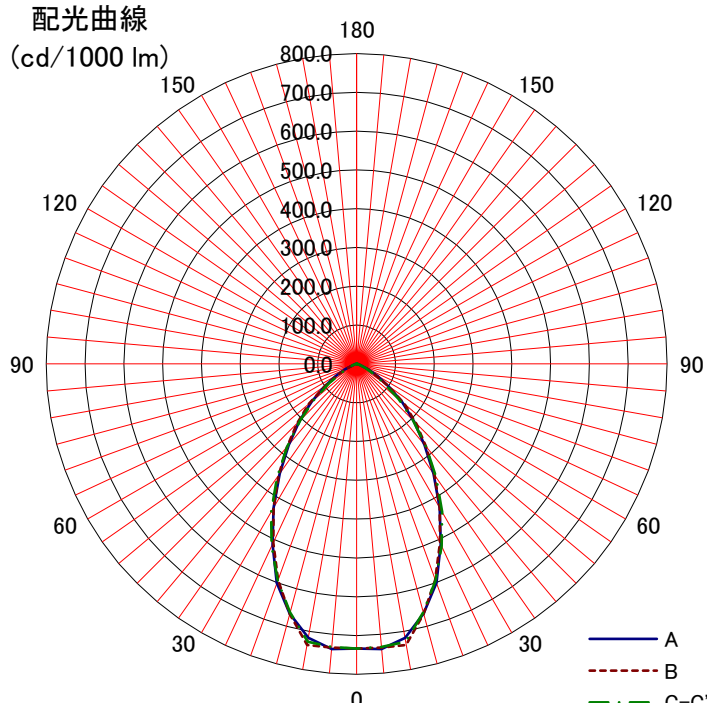
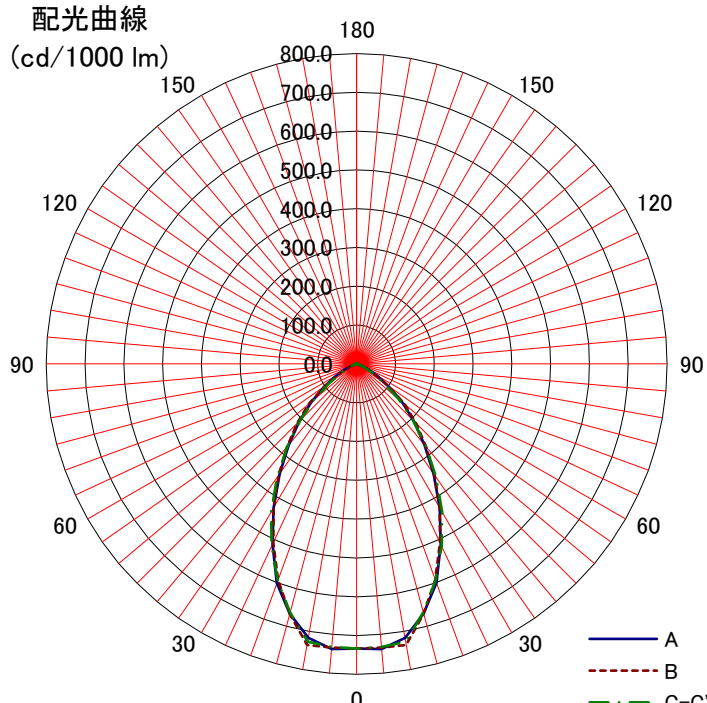


日立照明器具 照明特性

名称: 高天井用LED器具		天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: MTE17ANN-J14B		床	10%														0%
			室指数		固有照明率 S/H=1.0												
<備考>		0.6	0.72	0.64	0.58	0.72	0.63	0.58	0.54	0.63	0.58	0.54	0.62	0.57	0.54	0.53	
		0.8	0.81	0.73	0.68	0.80	0.73	0.68	0.64	0.72	0.67	0.64	0.71	0.67	0.64	0.62	
姿図 		1	0.86	0.79	0.74	0.85	0.79	0.74	0.71	0.78	0.73	0.70	0.76	0.73	0.70	0.68	
		1.25	0.91	0.85	0.80	0.90	0.84	0.80	0.76	0.83	0.79	0.76	0.81	0.78	0.75	0.74	
		1.5	0.94	0.89	0.84	0.93	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.80	0.78	
		2	0.98	0.94	0.90	0.97	0.93	0.89	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.83	
		2.5	1.00	0.96	0.93	0.99	0.95	0.92	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86	
		3	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.92	0.90	0.88	
光源形式 -		4	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.96	0.94	0.95	0.94	0.93	0.90	
		5	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
器具光束 17,000 lm		7	1.06	1.04	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.98	0.95	
		10	1.07	1.06	1.05	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.97	
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		A← 水平距離(m) →B 															
A-A 0.98 H																	
B-B 0.96 H																	
保守率																	
良 0.83		配光曲線 (cd/1000 lm) 															
中 0.81																	
否 0.76																	
光度 (cd/1000 lm)		A← 水平距離(m) →B 															
A-0 B-B C-0 A'-0 C'-0																	
0 734 734 734																	
10 717 736 727																	
20 601 593 594		A← 水平距離(m) →B 															
30 429 428 441																	
40 272 279 279																	
50 152 161 141																	
60 62 54 45		A← 水平距離(m) →B 															
70 13 13 10																	
80 4 4 5																	
90 1 1 0																	
100		A← 水平距離(m) →B 															
110																	
120																	
130																	
140		A← 水平距離(m) →B 															
150																	
160																	
170																	
180		A← 水平距離(m) →B 