
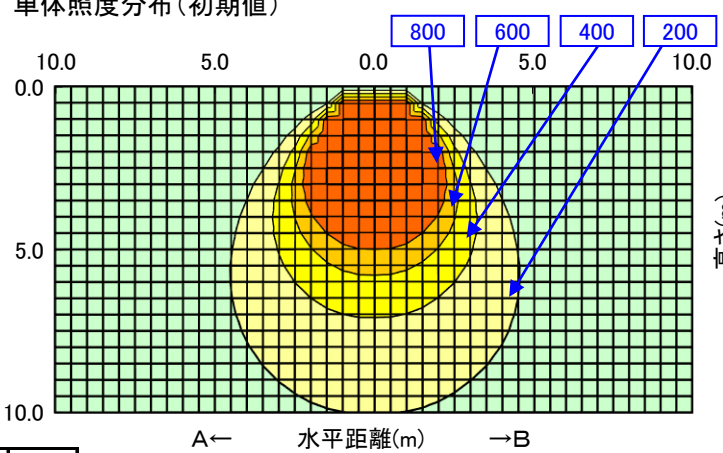
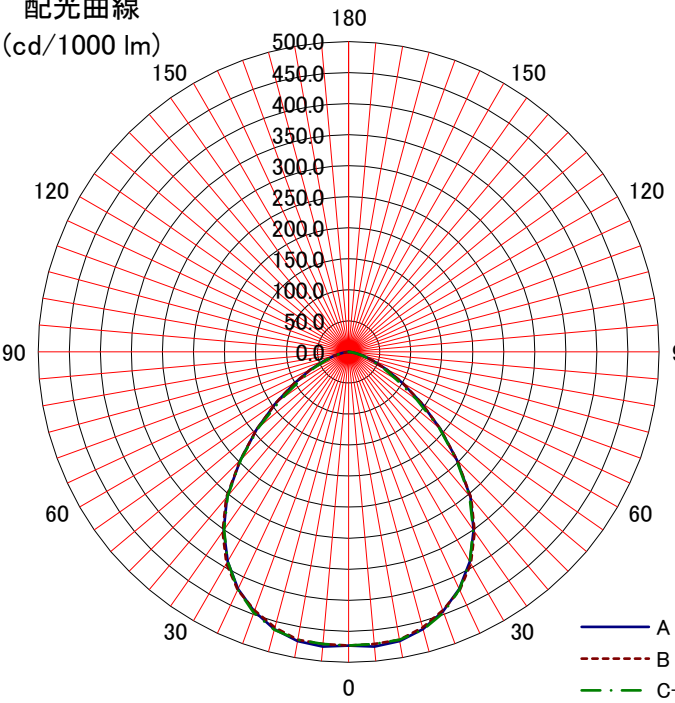


日立照明器具 照明特性

名称: 高天井用LED器具			反射率	天井 壁 床	80%			70%			50%			30%			0%			
					70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
形式: MTE44BMN-J24A			室指数	固有照明率 S/H=1.0														0%		
																		0%		
<備考>			0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41			
			0.8	0.75	0.65	0.59	0.73	0.65	0.58	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52			
			1	0.81	0.72	0.66	0.79	0.71	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.60	0.59			
			1.25	0.86	0.78	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.67	0.75	0.70	0.67	0.65			
			1.5	0.90	0.83	0.78	0.88	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.70			
			2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.79	0.77			
			2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81			
			3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.83			
光源形式			4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.87			
-			5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89			
器具光束			7	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.97	0.96	0.93			
42,500 lm			10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96			
器具効率 Ft= 100%																				
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔																				
A-A 1.22 H																				
B-B 1.24 H																				
保守率	良	0.83																		
	中	0.81																		
	否	0.76																		
光度 (cd/1000 lm)																				
	A-0	B-B																C-0	A'-0	C'-0
0	473	473																473		
10	473	471																471		
20	445	443																447		
30	390	394																390		
40	305	307																303		
50	193	193																190		
60	100	101																89		
70	42	42	39																	
80	11	10	11																	
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				