
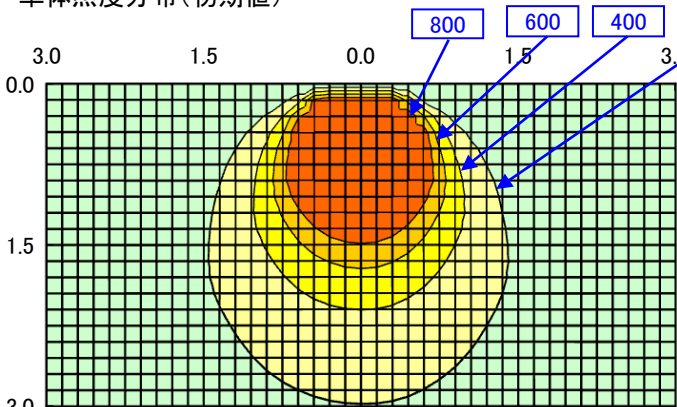
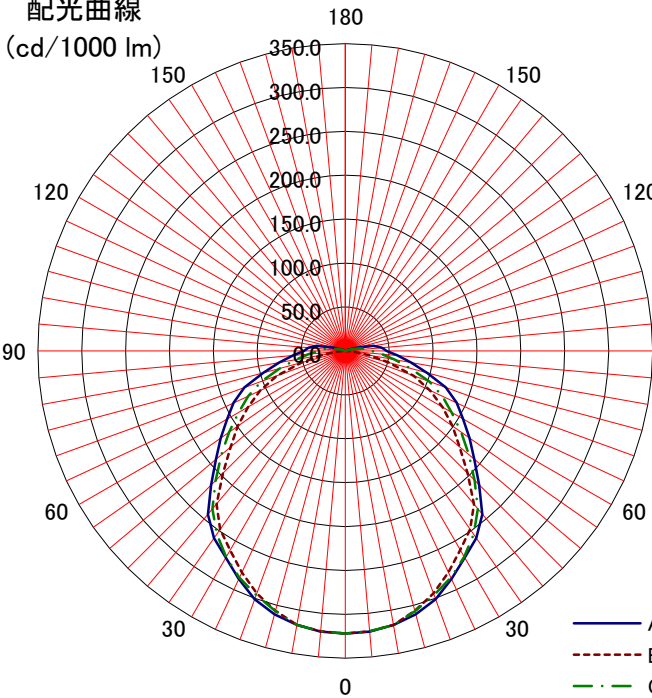
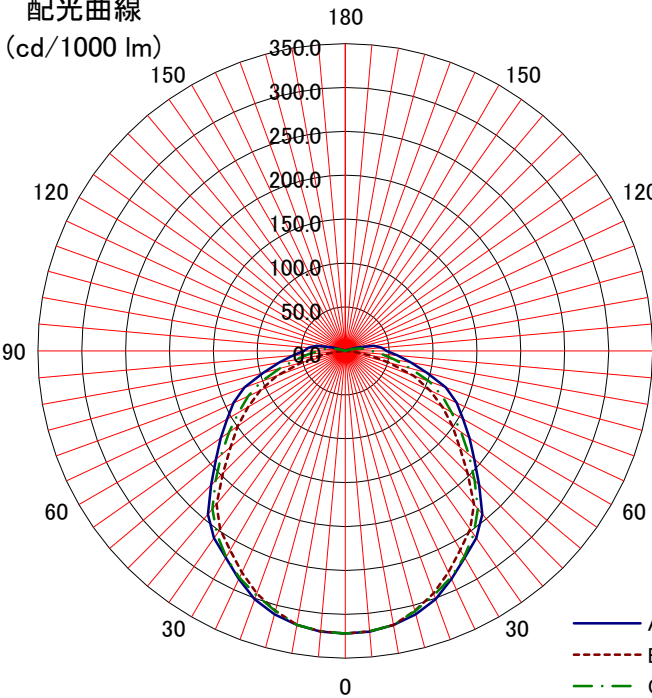
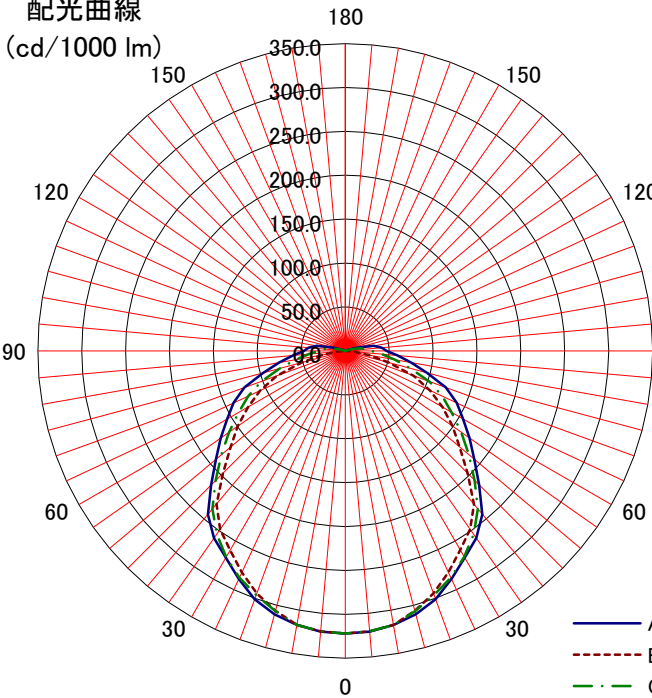
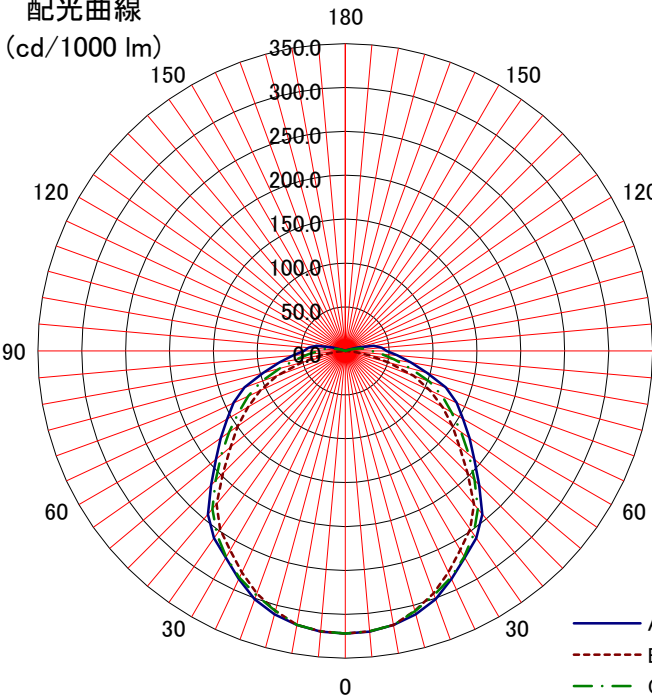


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	80%			70%				50%			30%			0%		
		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
形式: NC4A	室指数	固有照明率 S/H=1.0															
＜備考＞	0.6	0.56	0.44	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28		
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37		
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43		
	1.25	0.77	0.67	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.62	0.57	0.52	0.49		
	1.5	0.82	0.73	0.66	0.80	0.71	0.65	0.60	0.69	0.63	0.59	0.67	0.62	0.58	0.55		
	2	0.87	0.80	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.66	0.73	0.69	0.65	0.62		
	2.5	0.91	0.84	0.78	0.89	0.83	0.77	0.73	0.80	0.75	0.71	0.77	0.73	0.70	0.67		
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.77	0.74	0.70		
	4	0.96	0.91	0.87	0.94	0.90	0.86	0.82	0.87	0.83	0.80	0.84	0.81	0.79	0.75		
光源形式	5	0.98	0.94	0.90	0.96	0.93	0.89	0.86	0.90	0.87	0.84	0.87	0.84	0.82	0.79		
器具光束	7	1.01	0.98	0.95	0.99	0.96	0.94	0.91	0.93	0.91	0.89	0.90	0.89	0.87	0.83		
5,500 lm	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.95	0.93	0.93	0.92	0.91	0.87		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 3.3%																	
下方光束 Fd= 96.7%																	
最大取付間隔		配光曲線 															
A-A 1.28 H																	
B-B 1.22 H																	
保守率	良	0.88	配光曲線 														
	中	0.86															
	否	0.81															
光度 (cd/1000 lm)		配光曲線 															
	A-0	B-B	C-0	A'-0	C'-0												
0	322	322	322			配光曲線 											
10	317	317	317														
20	301	294	296														
30	272	262	271														
40	243	228	235														
50	192	170	184														
60	155	128	140														
70	122	83	102														
80	76	27	57														
90	47	1	30														
100	33	1	17														
110	4																
120																	
130																	
140																	
150																	
160																	
170																	
180																	