
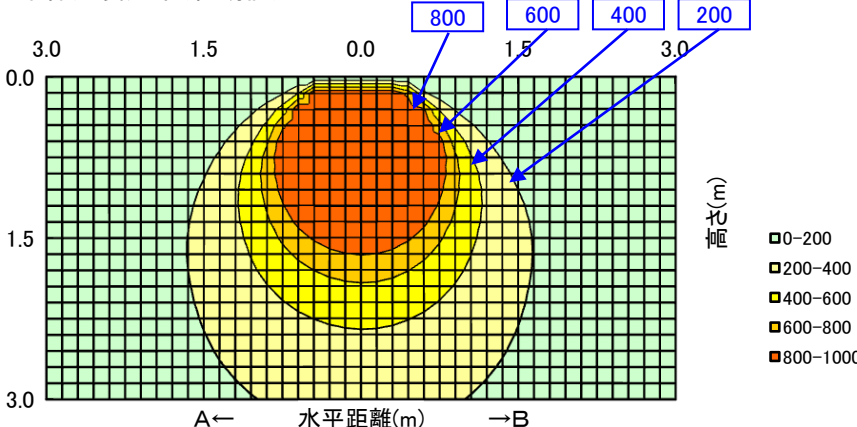
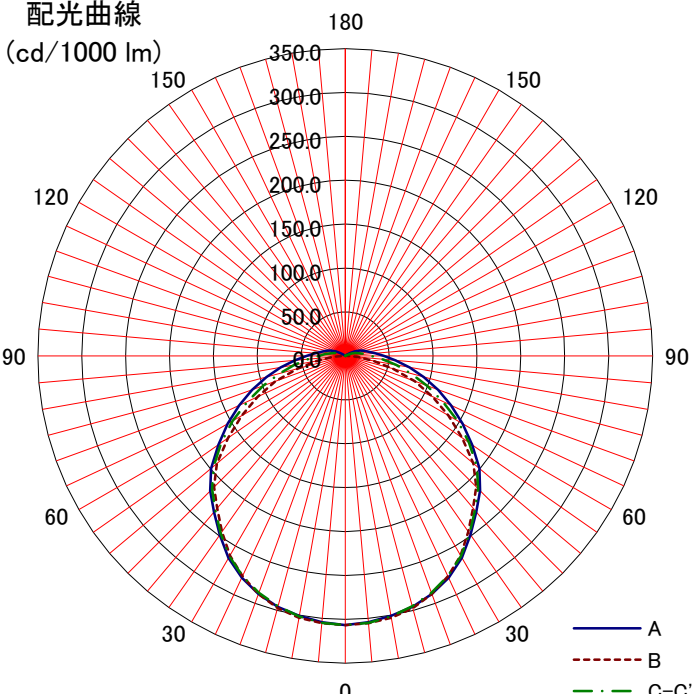


日立照明器具 照明特性

名称: 交換形LED逆富士形	反射率	天井	80%			70%				50%			30%			0%														
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%														
		床	10%														0%													
		室指数	固有照明率 S/H=1.0																											
形式: NC4A																														
<備考>		0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.34	0.30	0.28														
		0.8	0.66	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.39	0.36														
姿図 		1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.58	0.51	0.46	0.56	0.50	0.45	0.43														
		1.25	0.78	0.68	0.60	0.76	0.66	0.59	0.54	0.64	0.58	0.53	0.62	0.56	0.52	0.49														
		1.5	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.69	0.63	0.58	0.67	0.62	0.57	0.54														
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.66	0.73	0.69	0.65	0.62														
		2.5	0.91	0.84	0.79	0.89	0.83	0.78	0.73	0.80	0.76	0.72	0.77	0.73	0.70	0.67														
		3	0.94	0.88	0.82	0.92	0.86	0.81	0.77	0.83	0.79	0.75	0.80	0.77	0.74	0.70														
		4	0.97	0.92	0.87	0.95	0.90	0.86	0.83	0.87	0.84	0.81	0.84	0.81	0.79	0.75														
光源形式		5	0.99	0.95	0.91	0.97	0.93	0.90	0.87	0.90	0.87	0.84	0.87	0.85	0.82	0.79														
CE407NA-JX14		7	1.01	0.98	0.96	1.00	0.97	0.94	0.92	0.94	0.91	0.89	0.91	0.89	0.87	0.83														
器具光束		10	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.95	0.93	0.94	0.92	0.91	0.87														
7,200 lm																														
器具効率 Ft= 100%			単体照度分布(初期値) 																											
上方光束 Fu= 4.2%																														
下方光束 Fd= 95.8%																														
最大取付間隔																														
A-A 1.30 H																														
B-B 1.28 H																														
保守率	良	0.88	配光曲線 (cd/1000 lm) 																											
	中	0.86																												
	否	0.81																												
光度 (cd/1000 lm)																														
	A-0	B-B															C-0	A'-0	C'-0											
0	306	306															306													
10	301	303	301																											
20	289	289	287																											
30	266	263	264																											
40	232	227	230																											
50	199	191	196																											
60	154	136	148																											
70	113	84	99																											
80	75	33	59																											
90	44	3	30																											
100	27	1	17																											
110	18	1	8																											
120	7	1	1																											
130																														
140																														
150																														
160																														
170																														
180																														