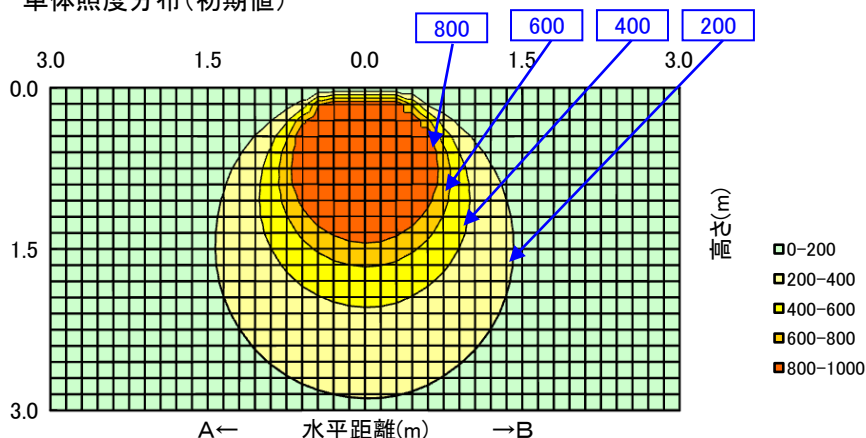
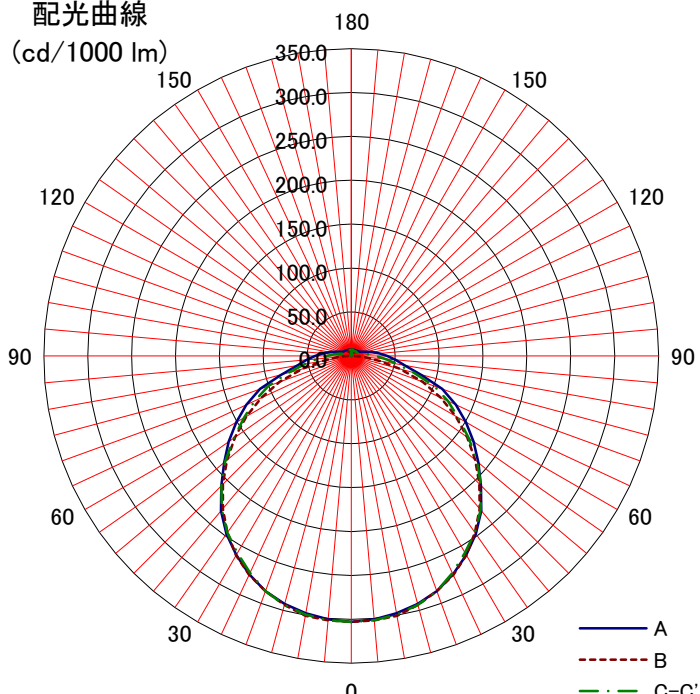


日立照明器具 照明特性

名称: 一体形LED器具 (ストレートタイプ)	反 射 率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: NE42AN-J14A	室指数	固有照明率 S/H=1.0																	
<備考> 定格出力タイプ 昼白色相当	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.40	0.34	0.30	0.27				
	0.8	0.65	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.38	0.36				
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.57	0.51	0.46	0.55	0.49	0.45	0.42				
	1.25	0.78	0.68	0.60	0.75	0.66	0.59	0.54	0.64	0.57	0.53	0.61	0.56	0.51	0.48				
	1.5	0.82	0.73	0.66	0.80	0.71	0.65	0.59	0.69	0.63	0.58	0.66	0.61	0.57	0.54				
	2	0.88	0.80	0.74	0.85	0.78	0.72	0.68	0.75	0.70	0.66	0.72	0.68	0.64	0.61				
	2.5	0.91	0.84	0.79	0.89	0.83	0.77	0.73	0.79	0.75	0.71	0.76	0.73	0.69	0.66				
	3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.82	0.78	0.75	0.79	0.76	0.73	0.69				
光源形式 	4	0.96	0.92	0.87	0.94	0.90	0.86	0.82	0.86	0.83	0.80	0.83	0.80	0.78	0.74				
	5	0.98	0.94	0.91	0.96	0.93	0.89	0.86	0.89	0.86	0.84	0.86	0.84	0.81	0.77				
器具光束 5,500 lm	7	1.01	0.98	0.95	0.99	0.96	0.94	0.91	0.93	0.91	0.89	0.89	0.88	0.86	0.82				
	10	1.03	1.01	0.99	1.01	0.99	0.97	0.96	0.96	0.94	0.93	0.92	0.91	0.90	0.85				
器具効率 Ft= 100%		単体照度分布 (初期値) 																	
上方光束 Fu= 6%																			
下方光束 Fd= 94%																			
最大取付間隔																			
A-A 1.30 H																			
B-B 1.30 H																			
保守率	良	0.88																	
	中	0.86																	
	否	0.81																	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																	
	A-0															B-B	C-0	A'-0	C'-0
0	303															303	303		
10	298															300	299		
20	285															285	285		
30	262															262	259		
40	230															227	229		
50	189															185	187		
60	151															137	141		
70	110															87	101		
80	62															33	53		
90	41															3	27		
100	24															3	14		
110	14															3	8		
120	10															4	8		
130	9															5	7		
140	9															5	7		
150	8															6	7		
160	8	6	6																
170	7	7	7																
180																			