
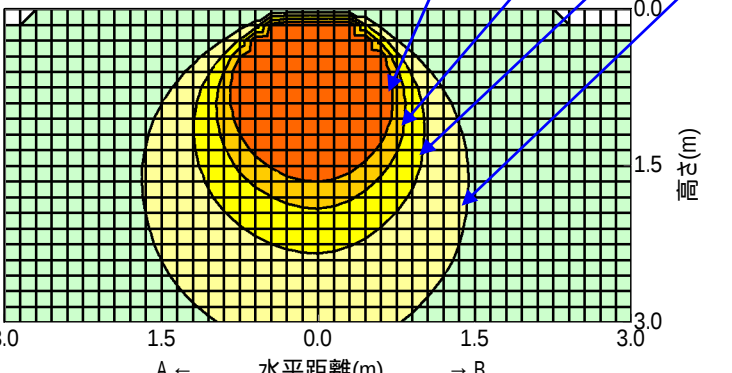
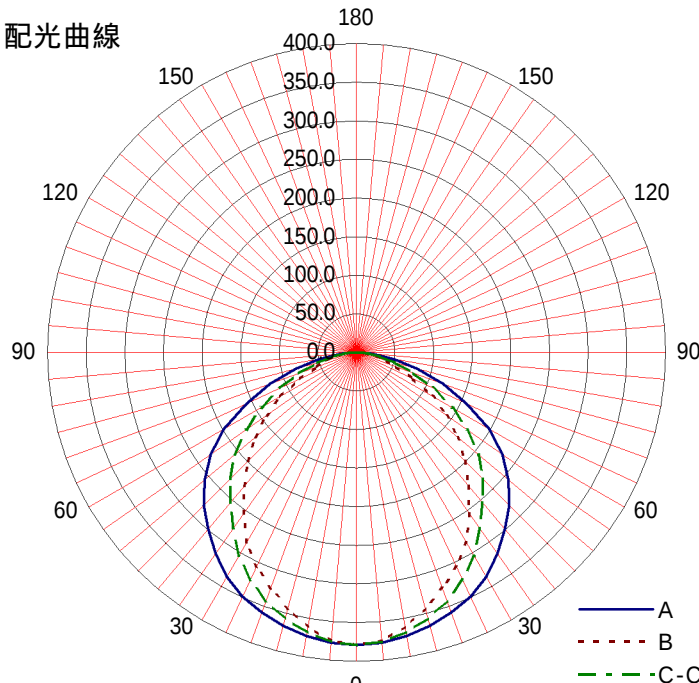


日立照明器具 照明特性

形式: NLE32401WW-JZ14A		天井 壁 床 反射率	80%			70%				50%			30%			0%				
<定格出力タイプ>			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
<温白色相当>			10%														0%			
<初期照度補正、連続調光共用形>			照明率 S/H=1.0																	
姿図 			0.6	0.59	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33			
			0.8	0.69	0.58	0.50	0.67	0.57	0.50	0.45	0.56	0.49	0.44	0.54	0.49	0.44	0.42			
			1	0.75	0.65	0.58	0.74	0.64	0.57	0.52	0.63	0.56	0.52	0.61	0.56	0.51	0.49			
			1.25	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56			
			1.5	0.85	0.77	0.71	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.62			
			2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.69			
			2.5	0.94	0.88	0.83	0.93	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.80	0.76	0.74			
			3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.77			
	光源		4	0.99	0.95	0.91	0.98	0.94	0.90	0.87	0.92	0.89	0.86	0.89	0.87	0.85	0.82			
	品名 LED		5	1.01	0.98	0.95	1.00	0.96	0.94	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85			
形式		7	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.90				
光束 5,760 lm		10	1.05	1.04	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.93				
器具効率 Ft= 100.0%			単体照度分布(初期) 																	
上方光束 Fu= 0.0%																				
下方光束 Fd= 100.0%																				
配光分類																				
BZ-																				
最大取付間隔																				
A-A 1.32 H																				
B-B 1.14 H																				
保守率	良	0.86																		
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)			配光曲線 																	
	A-0	B-B																C-0	A'-0	C'-0
0	379	379																379		
10	373	361																367		
20	358	325																342		
30	336	284																304		
40	299	226																254		
50	257	171																206		
60	198	113	143																	
70	119	55	79																	
80	49	26	31																	
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				