
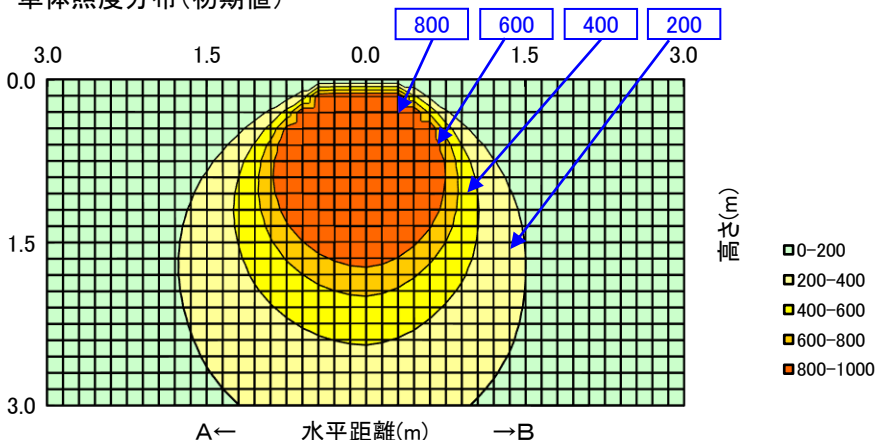
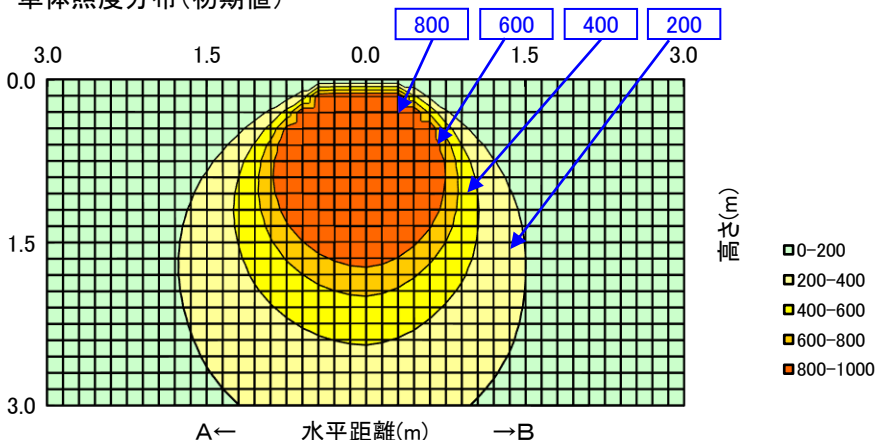
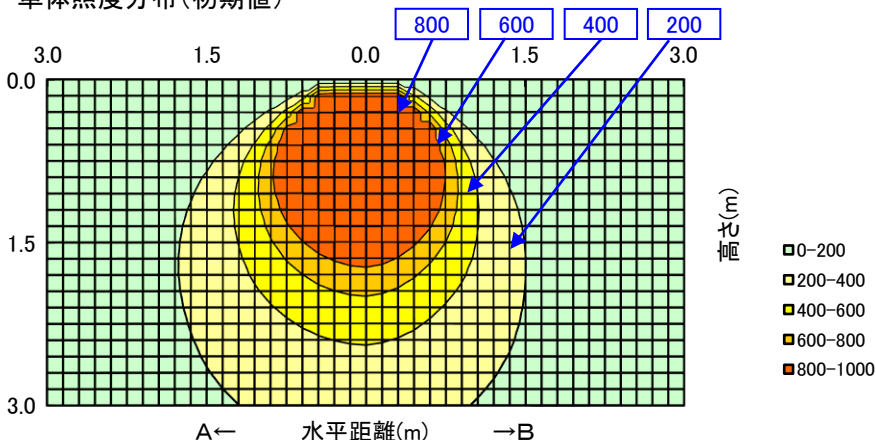
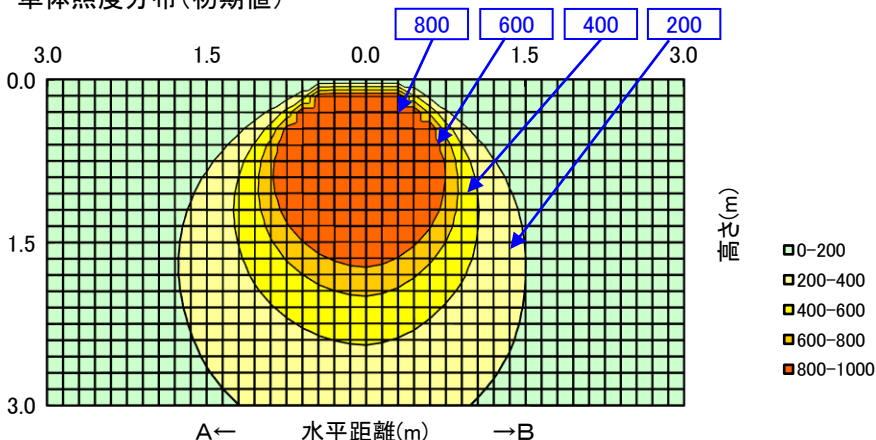


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%														0%			
形式: NLE324AD-JZ14A	室指数	固有照明率 S/H=1.0																		
<備考>	0.6	0.59	0.47	0.40	0.58	0.47	0.40	0.35	0.46	0.39	0.35	0.45	0.39	0.34	0.33					
	0.8	0.69	0.58	0.50	0.67	0.57	0.50	0.45	0.56	0.49	0.44	0.54	0.49	0.44	0.42					
姿図 	1	0.75	0.65	0.58	0.74	0.64	0.57	0.52	0.63	0.56	0.52	0.61	0.56	0.51	0.49					
	1.25	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56					
	1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.62					
	2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.72	0.79	0.75	0.72	0.69					
	2.5	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74					
	3	0.96	0.91	0.86	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.77					
光源形式 -	4	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.89	0.86	0.89	0.87	0.85	0.82					
	5	1.01	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.85					
器具光束 6,310 lm	7	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92	0.90					
	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.98	0.98	0.97	0.96	0.93					
器具効率 Ft= 100%		単体照度分布(初期値) 																		
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔		配光曲線 																		
A-A 1.32 H																				
B-B 1.14 H																				
保守率	良	0.86	配光曲線 																	
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)		配光曲線 																		
	A-0																B-B	C-0	A'-0	C'-0
0	379																379	379		
10	373	361	367																	
20	358	325	342																	
30	336	284	304																	
40	299	226	254																	
50	257	171	206																	
60	198	113	143																	
70	119	55	79																	
80	49	26	31																	
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				