
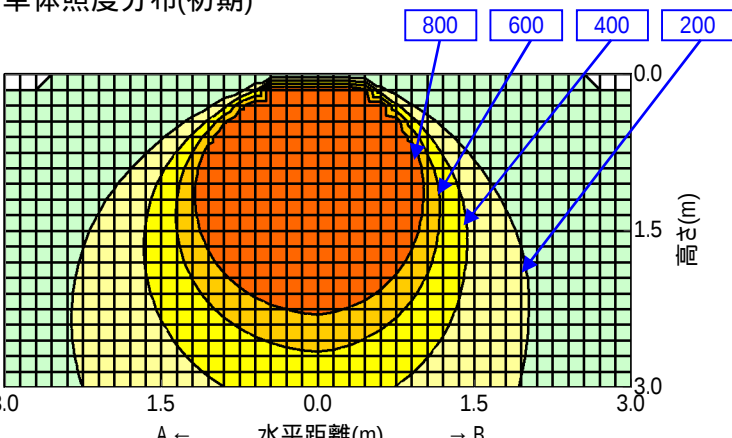
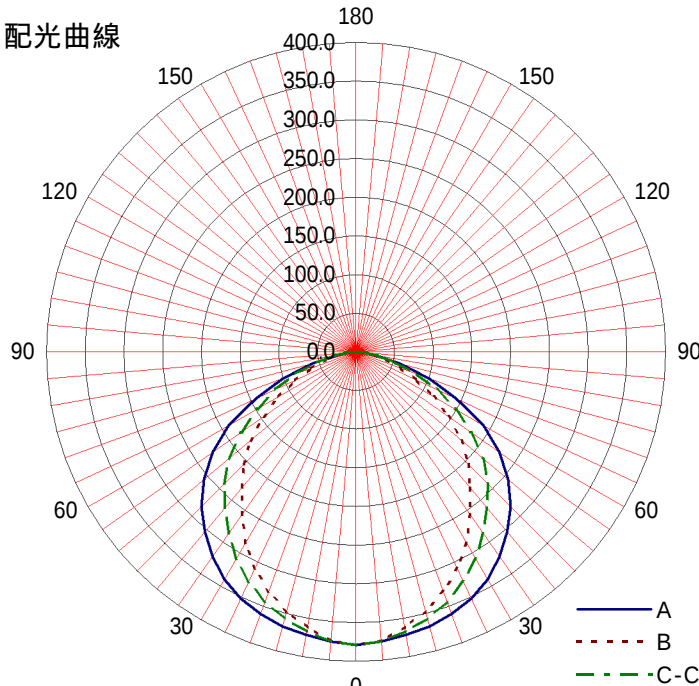


日立照明器具 照明特性

形式: NLE45401WW-JZU14 <高出力タイプ> <温白色相当> <照度補正、連続調光共用形>		天井	80%			70%				50%			30%			0%
反射率		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
室指数		照明率 S/H=1.0														
		0.6	0.60	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33
		0.8	0.69	0.58	0.51	0.68	0.58	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50
		1.25	0.82	0.72	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57
		1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.62
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78
		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83
		5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86
7	1.04	1.02	0.99	1.03	1.00	0.98	0.97	0.98	0.96	0.95	0.96	0.95	0.93	0.90		
10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94		

器具効率 Ft= 100.0%																	
上方光束 Fu= 0.0%																	
下方光束 Fd= 100.0%																	
配光分類																	
BZ-																	
最大取付間隔																	
A-A 1.34 H																	
B-B 1.14 H																	
保守率	良	0.81															
	中	0.77															
	否	0.68															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	379	379	379														
10	372	361	366														
20	361	330	344														
30	339	286	309														
40	304	229	263														
50	256	178	215														
60	190	116	148														
70	101	62	84														
80	27	23	28														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	