
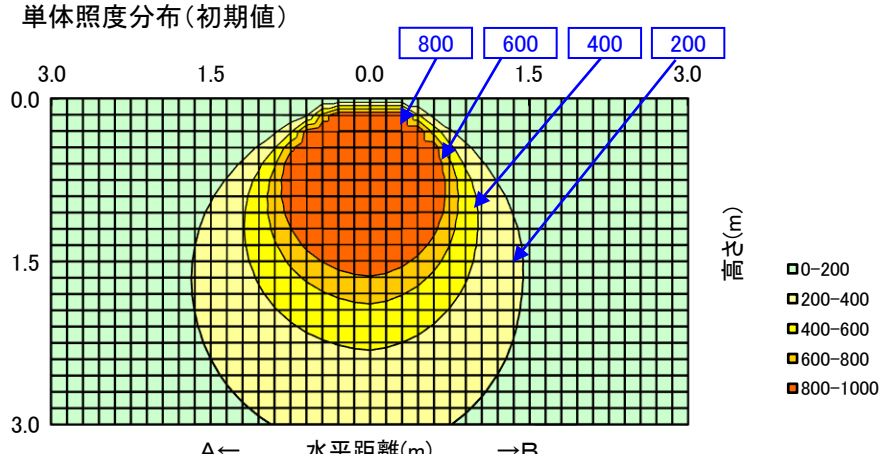
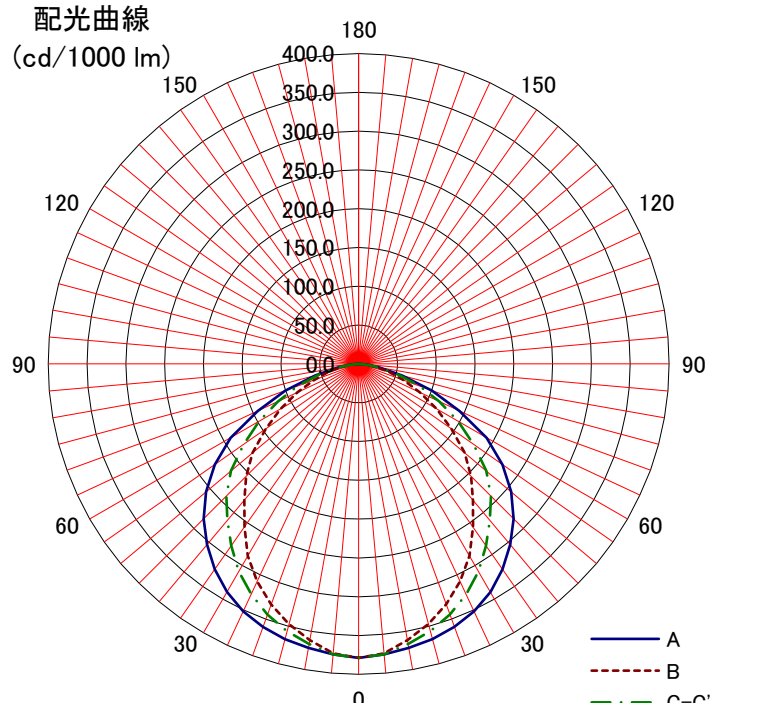


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: NLE454AW-JZL14A	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.60	0.48	0.40	0.58	0.47	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33				
	0.8	0.69	0.58	0.51	0.68	0.58	0.50	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43				
姿図 	1	0.76	0.66	0.58	0.74	0.65	0.58	0.52	0.63	0.57	0.52	0.62	0.56	0.52	0.50				
	1.25	0.82	0.72	0.65	0.80	0.71	0.65	0.60	0.70	0.64	0.59	0.68	0.63	0.59	0.57				
	1.5	0.86	0.78	0.71	0.84	0.77	0.71	0.66	0.75	0.70	0.65	0.73	0.69	0.65	0.62				
	2	0.91	0.85	0.79	0.90	0.84	0.78	0.74	0.82	0.77	0.73	0.80	0.76	0.73	0.70				
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75				
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78				
光源形式	4	1.00	0.96	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83				
-	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86				
器具光束	7	1.04	1.01	0.99	1.03	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.90				
5,670 lm	10	1.06	1.04	1.03	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.94				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.34 H																			
B-B 1.14 H																			
保守率	良															0.86			
	中															0.81			
	否															0.72			
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																	
	A-0															B-B	C-0	A'-0	C'-0
0	379															379	379		
10	372															361	366		
20	361															330	344		
30	339															286	309		
40	304															229	263		
50	256															178	215		
60	190															116	148		
70	101															62	84		
80	27															23	28		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			