
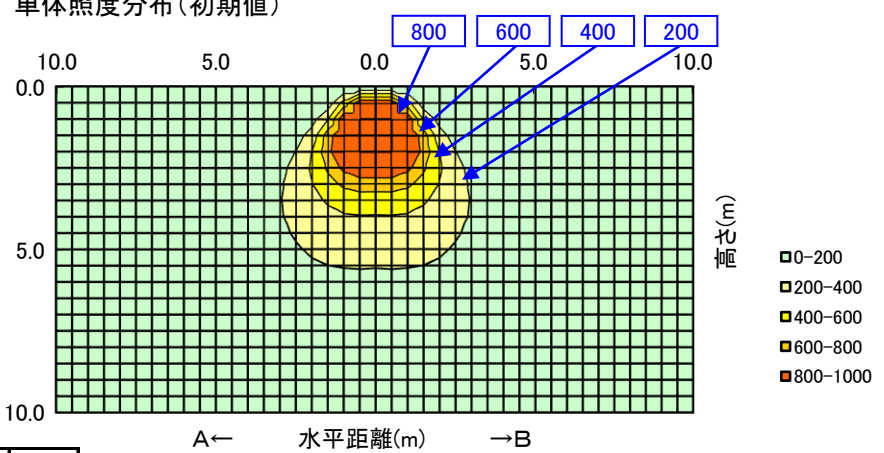
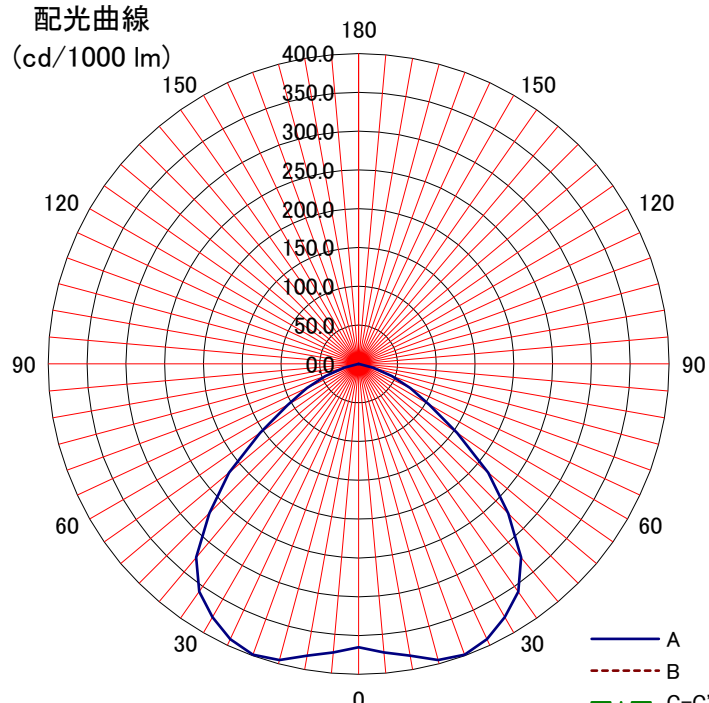


日立照明器具 照明特性																				
名称: 高天井用LEDランプ (アームタイプ)	反 射 率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%													0%				
形式: RBME16CMNC1	室指数	固有照明率 S/H=1.0																		
<備考>	0.6	0.63	0.52	0.45	0.61	0.51	0.44	0.40	0.50	0.44	0.40	0.49	0.44	0.39	0.38					
	0.8	0.73	0.63	0.56	0.71	0.62	0.56	0.51	0.61	0.55	0.51	0.60	0.54	0.50	0.49					
姿図 	1	0.79	0.70	0.64	0.78	0.69	0.63	0.59	0.68	0.63	0.58	0.67	0.62	0.58	0.56					
	1.25	0.85	0.77	0.71	0.83	0.76	0.70	0.66	0.74	0.69	0.65	0.73	0.69	0.65	0.63					
	1.5	0.89	0.82	0.76	0.88	0.81	0.76	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.68					
	2	0.94	0.88	0.84	0.93	0.87	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.76					
	2.5	0.97	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.80					
	3	0.99	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82					
光源形式	4	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.86					
-	5	1.03	1.00	0.97	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89					
器具光束	7	1.05	1.03	1.01	1.03	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.96	0.95	0.93					
17,000 lm	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96					
器具効率 Ft= 100%		単体照度分布(初期値) 																		
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔																				
A-A 1.48 H																				
B-B H																				
保守率	良	0.81																		
	中	0.79																		
	否	0.75																		
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																		
	A-0																B-B	C-0	A'-0	C'-0
0	365																			
10	382																			
20	399																			
30	377																			
40	326																			
50	218																			
60	105																			
70	46																			
80	3																			
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				