
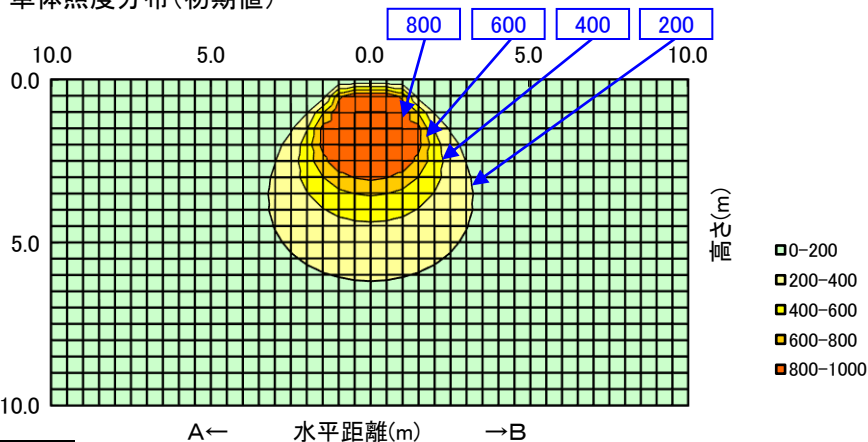
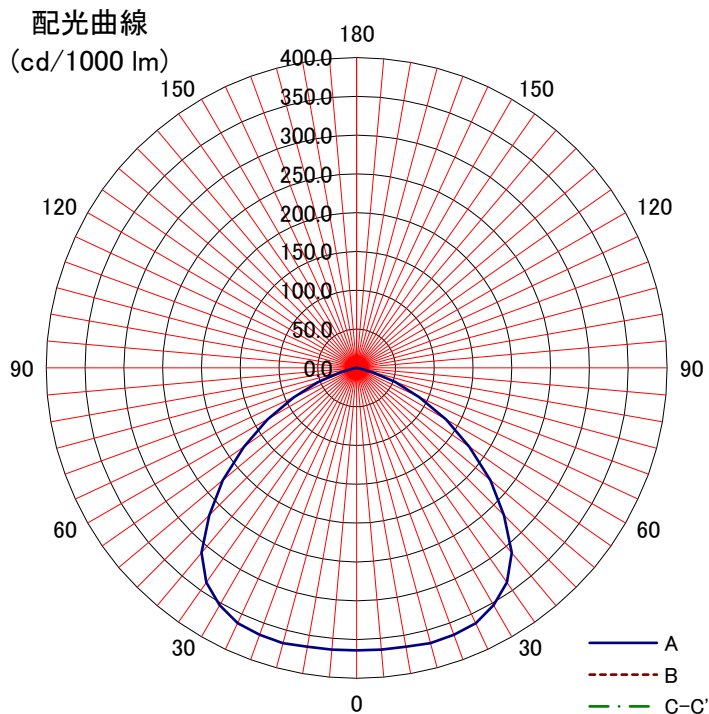


日立照明器具 照明特性

名称: 高天井用LEDランプ (アームタイプ)	反射率	天井	80%			70%				50%			30%			0%														
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%														
		床	10%														0%													
形式: RBME2101MNC	室指数	固有照明率 S/H=1.0																												
＜備考＞	0.6	0.61	0.50	0.43	0.60	0.49	0.42	0.37	0.48	0.42	0.37	0.47	0.41	0.37	0.35															
	0.8	0.71	0.61	0.54	0.70	0.60	0.53	0.49	0.59	0.53	0.48	0.58	0.52	0.48	0.46															
姿図 	1	0.78	0.68	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.56	0.65	0.60	0.56	0.54															
	1.25	0.84	0.75	0.69	0.82	0.75	0.69	0.64	0.73	0.68	0.63	0.71	0.67	0.63	0.61															
	1.5	0.88	0.81	0.75	0.87	0.80	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67															
	2	0.93	0.87	0.82	0.92	0.86	0.82	0.78	0.85	0.81	0.77	0.83	0.79	0.76	0.74															
	2.5	0.96	0.91	0.87	0.95	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.78															
	3	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81															
	4	1.01	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.89	0.92	0.90	0.88	0.86															
光源形式 -	5	1.03	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.89															
器具光束 21,000 lm	7	1.05	1.03	1.01	1.03	1.02	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92															
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.95															
器具効率 Ft= 100%		単体照度分布(初期値) 																												
上方光束 Fu= 0%																														
下方光束 Fd= 100%																														
最大取付間隔																														
A-A 1.44 H																														
B-B H																														
保守率	良	0.81	配光曲線 (cd/1000 lm) 																											
	中	0.79																												
	否	0.75																												
光度 (cd/1000 lm)																														
	A-0	B-B															C-0	A'-0	C'-0											
0	364																													
10	365																													
20	366																													
30	353																													
40	311																													
50	225																													
60	133																													
70	53																													
80	4																													
90																														
100																														
110																														
120																														
130																														
140																														
150																														
160																														
170																														
180																														