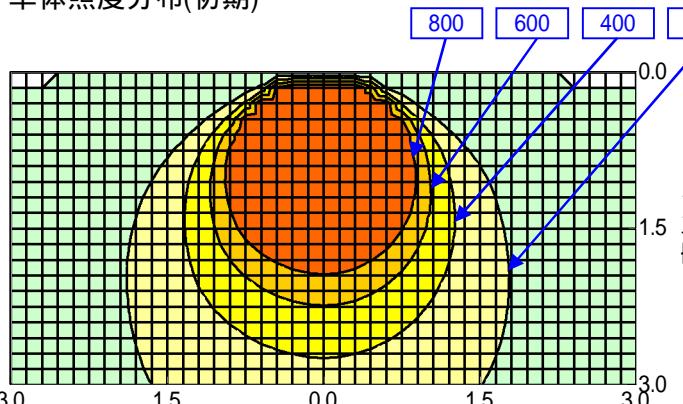
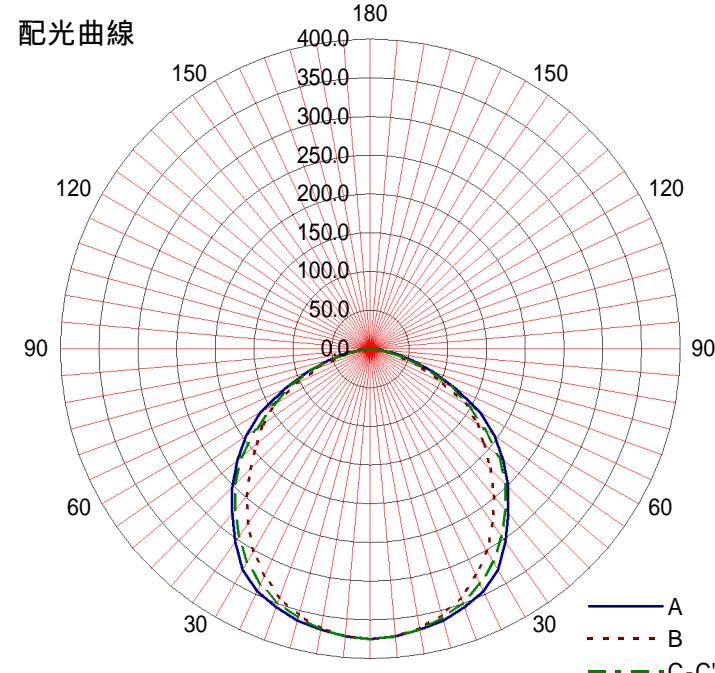


## 日立照明器具 照明特性

形式: TE32401N-JZU14 <高出力タイプ> <昼白色相当> <照度補正、連続調光共用形>	反射率	天井	80%			70%			50%			30%			0%				
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
	床	10%												0%					
	室指数	照明率 S/H=1.0																	
姿図		0.6	0.60	0.48	0.41	0.58	0.48	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33			
		0.8	0.69	0.59	0.51	0.68	0.58	0.51	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43			
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50			
		1.25	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.60	0.68	0.63	0.59	0.57			
		1.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63			
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.70			
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.75			
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78			
光源		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83			
品名	LED		5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86		
形式	7		7	1.04	1.02	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91		
光束	8,020 lm		10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94		
器具効率 $F_t = 100.0\%$		単体照度分布(初期)																	
上方光束 $F_u = 0.0\%$																			
下方光束 $F_d = 100.0\%$																			
配光分類																			
BZ-																			
最大取付間隔																			
A-A 1.30 H																			
B-B 1.20 H																			
保守率	良	0.81																	
	中	0.77																	
	否	0.68																	
光度 (cd/1000 lm)																			
	A-0	B-B	C-0	A'-0	C'-0														
0	375	375	375																
10	368	366	368																
20	355	342	349																
30	329	302	318																
40	277	248	271																
50	224	191	217																
60	163	142	145																
70	85	71	84																
80	31	22	25																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			