
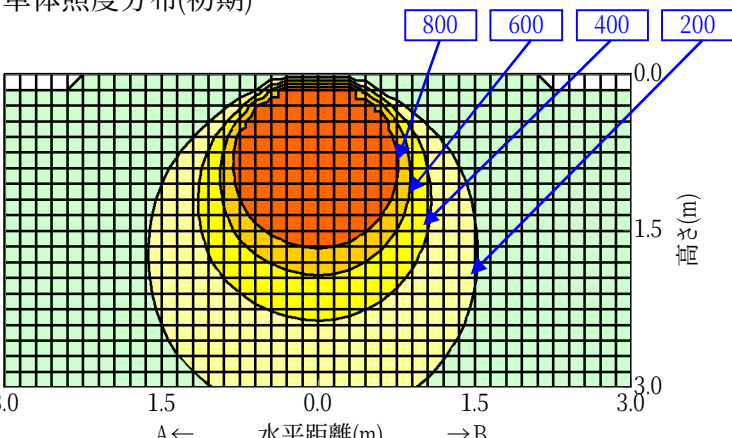
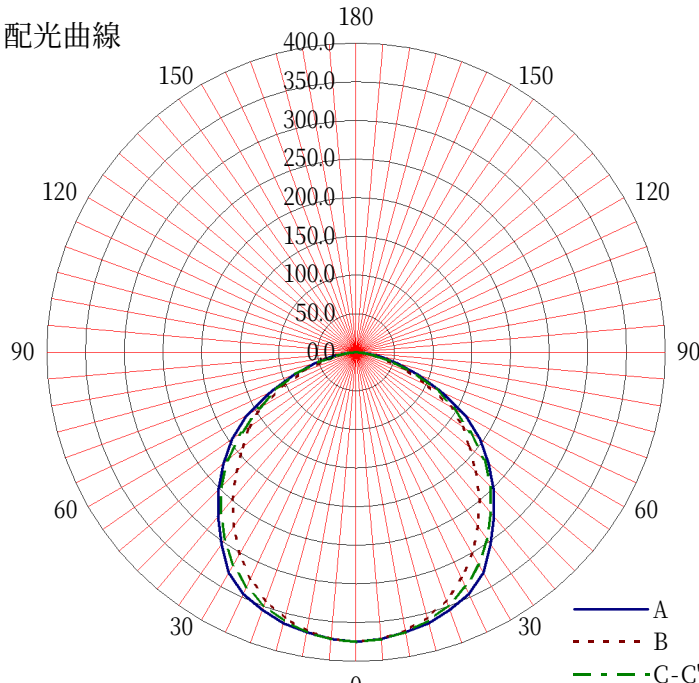


日立照明器具 照明特性

形式: TE32401W-JZ14A		天井 壁 床 反射率	80%			70%				50%			30%			0%			
<定格出力タイプ>			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
<白色相当>			10%														0%		
<初期照度補正、連続調光共用形>			照明率 S/H=1.0																
姿図 		0.6	0.60	0.48	0.41	0.58	0.48	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33			
		0.8	0.69	0.59	0.51	0.68	0.58	0.51	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43			
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50			
		1.25	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.60	0.68	0.63	0.59	0.57			
		1.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63			
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.70			
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.75			
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78			
		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83			
		品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86	
形式		7	1.04	1.02	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91			
光束	5,930 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94			
器具効率 Ft= 100.0%			単体照度分布(初期) 																
上方光束 Fu= 0.0%																			
下方光束 Fd= 100.0%																			
配光分類																			
BZ-																			
最大取付間隔																			
A-A 1.30 H																			
B-B 1.20 H																			
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)			配光曲線 																
	A-0	B-B															C-0	A'-0	C'-0
0	375	375															375		
10	368	366															368		
20	355	342															349		
30	329	302															318		
40	277	248															271		
50	224	191															217		
60	163	142															145		
70	85	71															84		
80	31	22															25		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			