
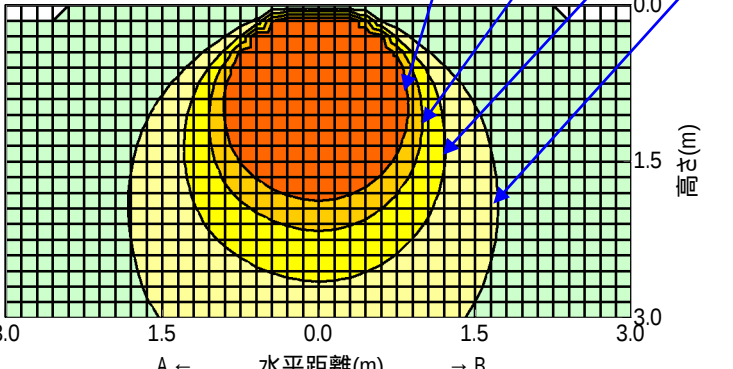
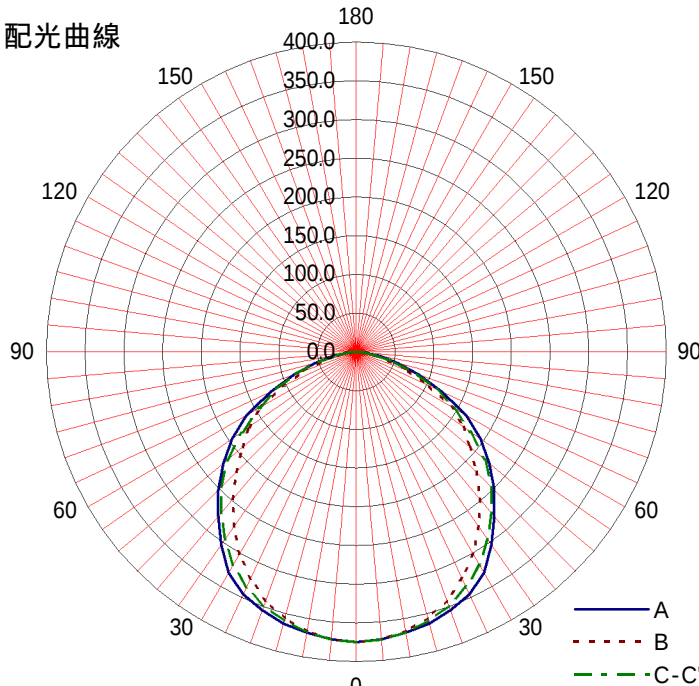


日立照明器具 照明特性

形式: TE32401WW-JZU14A		反 射 率	天井	80%			70%				50%			30%			0%		
<高出力タイプ> <温白色相当> <初期照度補正、連続調光共用形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数																
姿図		照明率 S/H=1.0																	
		0.6	0.60	0.48	0.41	0.58	0.48	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33			
		0.8	0.69	0.59	0.51	0.68	0.58	0.51	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43			
		1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50			
		1.25	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.60	0.68	0.63	0.59	0.57			
		1.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63			
		2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.70			
		2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.75			
		3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78			
光源		4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83			
品名	LED	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86			
形式		7	1.04	1.02	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91			
光束	7,500 lm	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94			

器具効率 Ft= 100.0%			単体照度分布(初期)  0-200 200-400 400-600 600-800 800-1000																	
上方光束 Fu= 0.0%																				
下方光束 Fd= 100.0%																				
配光分類																				
BZ-																				
最大取付間隔																				
A-A 1.30 H																				
B-B 1.20 H																				
保守率	良	0.86																		
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)			配光曲線  A B C-C'																	
	A-0	B-B																		C-0
0	375	375																		375
10	368	366																		368
20	355	342																		349
30	329	302																		318
40	277	248																		271
50	224	191																		217
60	163	142																		145
70	85	71																		84
80	31	22																		25
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				